



CE 0168 ⓘ

P/N : MMBB0338640 (1.0) G

LG ELECTRONICS INC.

GD900 User Guide

ENGLISH

GD900 User Guide




This device uses non-harmonised frequency and is intended for use in all European countries.

The WLAN can be operated in the EU without restriction indoors, but cannot be operated outdoors in France.



Some of the contents in this manual may differ from your phone depending on the software of the phone or your service provider.

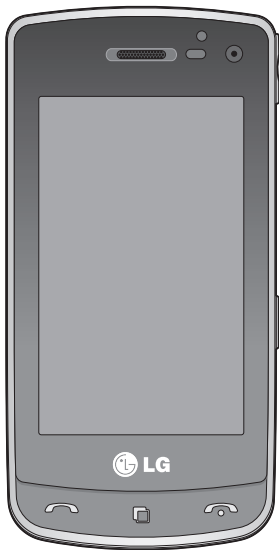

## GD900 User Guide



Congratulations on your purchase of the advanced and compact GD900 phone by LG, designed to operate with the latest digital mobile communication technology.



#### **Disposal of your old appliance**

- 1** When this crossed-out wheeled bin symbol is attached to a product it means the product is covered by the European Directive 2002/96/EC.
- 2** All electrical and electronic products should be disposed of separately from the municipal waste stream via designated collection facilities appointed by the government or the local authorities.
- 3** The correct disposal of your old appliance will help prevent potential negative consequences for the environment and human health.
- 4** For more detailed information about disposal of your old appliance, please contact your city office, waste disposal service or the shop where you purchased the product.

# Contents

## Set up

Getting to know your phone .....	8
Open view .....	10
Installing the SIM and battery .....	11
Charging your phone.....	13
Memory card.....	14
Menu map.....	16

## Your home screen

Touch screen tips.....	17
Customising the home screen.....	18
Get in touch with your GD900.....	19
Quick keys .....	20
Touch screen .....	21
Viewing the status bar .....	26
Using the Multi - tasking function.....	28

## The basics

Calls .....	29
Making a call or a video call.....	29
Calling your contacts .....	29
Answering and rejecting a call .....	29
In-call options.....	30
Adjusting call volume .....	31
Speed dialling .....	31
Making a second call.....	31
Turning off DTMF.....	32
Viewing your call logs.....	32
Using call divert .....	33

Using call barring .....	33
Changing the common call setting .....	34
Changing your video call settings.....	34
Contacts.....	35
Searching for a contact .....	35
Adding a new contact .....	35
Creating a group.....	36
Changing your contact settings.....	36
Viewing information .....	37
Messaging.....	38
Messaging .....	38
Sending a message.....	38
Entering text.....	39
T9 predictive .....	39
Abc manual .....	39
Setting up your email .....	39
Sending an email using your new account .....	40
Changing your email settings.....	40
Message folders .....	41
Using templates.....	42
Using emoticons.....	42
Changing your text message settings.....	42
Changing your multimedia message settings.....	43
Changing your other settings.....	44

## Get creative

Camera .....	45	Using zoom when viewing a video or photo .....	60
Getting to know the viewfinder .....	45	Adjusting the volume when viewing a video .....	60
Taking a quick photo.....	46	Setting a photo as wallpaper .....	60
Once you've taken the photo .....	46	Editing your photos.....	61
Using the flash.....	47	Adding text to a photo.....	62
Adjusting the exposure.....	48	Adding an effect to a photo .....	62
Adjusting the zoom.....	48	Cropping a photo .....	62
Taking a continuous shot .....	49	Adding a colour accent to a photo ..	63
Using the advanced settings.....	49	Swapping colours in a photo .....	63
Changing the image size .....	51	Editing your videos.....	63
Choosing a colour effect.....	51	Trimming the length of the video .....	64
Using the inner camera .....	52	Merging two videos .....	64
Viewing your saved photos .....	52	Merging a photo with a video .....	65
Video camera .....	53	Adding text to a video .....	65
Getting to know the viewfinder.....	53	Overlaying a photo .....	66
Shooting a quick video .....	54	Adding a soundtrack to your video ..	66
After shooting a video.....	54	Adding live sound to your video .....	67
Adjusting the exposure.....	55	Changing the video speed.....	67
Using the advanced settings.....	55	Adding a dimming effect .....	67
Changing the video image size.....	57	Multimedia.....	68
Choosing a colour tone.....	58	Pictures .....	68
Using the inner video camera.....	58	My images options menu.....	68
Watching your saved videos .....	59	Sending a photo .....	68
Watching your videos on TV.....	59	Using an image .....	69
Your photos and videos .....	60	Printing an image.....	69
Viewing your photos and videos.....	60	Moving or copying an image.....	70

# Contents

Creating a slide show .....	70
Checking your memory status .....	70
Sounds .....	70
Using a sound .....	70
Videos .....	71
Sending a video clip .....	71
Games and Applications .....	71
Playing a game .....	72
Using the options menu .....	72
Installing a Java game and application .....	72
Use the M-Toy menu .....	72
Flash contents .....	72
Viewing an SWF/ SVG file .....	73
Documents .....	73
Viewing a file .....	73
Transferring a file to your phone .....	73
Others .....	73
Creating a movie .....	74
Music .....	74
Transferring music onto your phone .....	75
Playing a song .....	75
Creating a playlist .....	76
Deleting a playlist .....	76
Using the radio .....	76
Searching for stations .....	77
Resetting channels .....	77
Listening to the radio .....	78

## Get organised

Organiser .....	79
Adding an event to your calendar .....	79
Changing your default calendar view .....	79
Adding an item to your To Do list .....	80
Using the date finder .....	80
Setting your alarm .....	81
Adding a memo .....	81
Voice recorder .....	81
Recording a sound or voice .....	82
Sending the voice recording .....	82
Using your calculator .....	82
Converting a unit .....	83
Using the stopwatch .....	83
Adding a city to your world clock .....	83
PC Suite .....	84
Installing the LG PC Suite on your computer .....	84
Connecting your phone and PC .....	84
Backing up and restoring your phone's information .....	85
Viewing phone files on your PC .....	85
Synchronising your contacts .....	85
Synchronising your messages .....	86
Music Sync .....	86
Transferring music using Windows Media Player .....	87



Using iSync .....	87	Wi-Fi.....	100
DivX Converter .....	88	Software Update.....	102
<b>The web</b>		<b>Accessories .....</b>	<b>103</b>
Browser .....	89	<b>Network service .....</b>	<b>104</b>
Accessing the web .....	89	<b>Technical data.....</b>	<b>104</b>
Adding and accessing bookmarks....	89	<b>Guidelines</b>	
Using the RSS reader.....	90	Guidelines for safe and efficient	
Accessing a saved page .....	90	use.....	106
Viewing your browser history.....	90	Trouble Shooting.....	112
Changing web browser settings.....	91		
Using your phone as a modem .....	91		
Access to Google Maps .....	92		
<b>Settings</b>			
Changing your screen settings.....	93		
Personalising your profiles.....	93		
Changing your phone settings.....	94		
Changing your touch settings .....	95		
Changing your connectivity			
settings.....	95		
Using memory manager .....	96		
Using flight mode.....	97		
Sending and receiving files using			
Bluetooth.....	97		
Changing your Bluetooth settings....	98		
Pairing with another Bluetooth			
device .....	99		
Using a Bluetooth headset.....	99		

# Getting to know your phone

## Power key

Turns the phone on/off.

## Earpiece

## Proximity Sensor

## Inner camera

## End key


- Rejects a call.
- Press once to return to the home screen.

## Multi-tasking key

## Send key

Dials a phone number and answers incoming calls.

## Battery release button

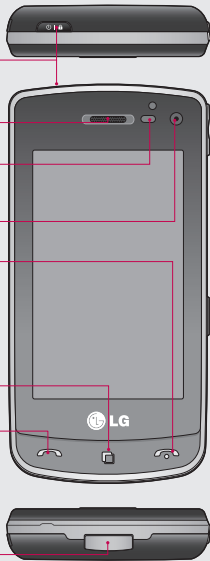

**WARNING:** Putting a heavy object on the phone or sitting on it can damage its LCD and touch screen functionality. Do not cover the protection film on proximity sensor of LCD. It can be caused the malfunction of sensor.



**Handsfree or Stereo earphone connector/ Charger, Data cable (USB cable)**

**TIP:** Before connecting the USB cable, wait until the phone has powered up and has registered on the network.




**Volume keys**

- **When the screen is idle:** key tone volume.
- **During a call:** earpiece volume.
- **When playing a track:** controls volume continuously.

**Camera key**

- Go to the camera menu directly by pressing and holding the key.


# Open view

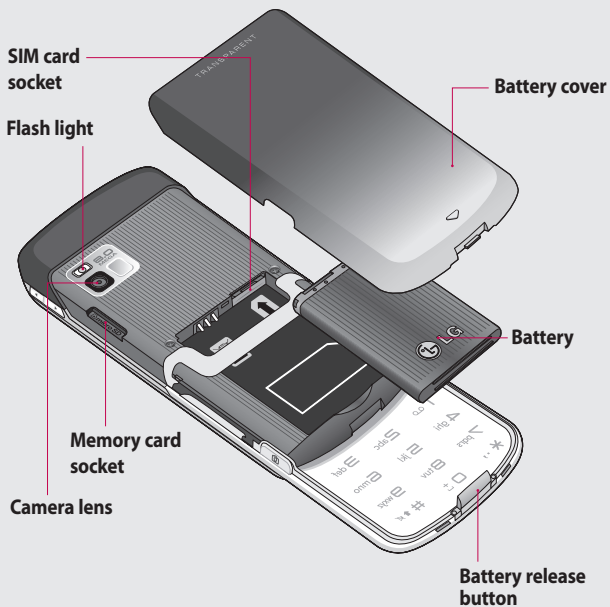

# Installing the SIM and battery


## 1 Remove the battery cover

Use your thumbnail to open the battery release button on the bottom of the phone and lift off the battery cover.



## 2 Remove the battery


Hold the top edge of the battery and lift it away from the battery compartment.



**⚠ WARNING:** Do not remove the battery when the phone is switched on, as this may damage the phone.

## 3 Install the SIM card


Slide the SIM card into the SIM card holder. Make sure the gold contact area on the card is facing downwards. To remove the SIM card, gently push it until it clicks. Gently pull it out.



# Installing the SIM and battery

## 4 Install the battery


Insert the top of the battery into the top edge of the battery compartment first. Ensure that the battery contacts align with the phone's terminals. Press the bottom of the battery down until it clips into place.



## Charging your phone

Slide back the cover of the charger connector on the side of your GD900. Insert the charger and plug it into a mains electricity socket. Your GD900 must be charged until the “Battery full” message appears on the screen.

**NOTE:** The battery must be fully charged initially to improve battery lifetime. Disregard the first “Battery full” message and keep the phone on charge overnight.




# Memory card



## Installing a memory card

You can expand the available memory space on your phone by using a memory card.

**NOTE:** A memory card is an optional accessory.

Slide the memory card into the slot at the top, until it clicks into place. Make sure the gold contact area is facing downwards.

 **WARNING:** Slide into the memory card to the slot, otherwise, the card can be damaged.






## Formatting the memory card

Your memory card may already be formatted. If it isn't, you will need to format it before you can start to use it.


**NOTE:** All files get deleted while formatting.

- 1 From the home screen select  and choose **Phone settings** from the Settings tab.
- 2 Scroll and touch **Memory manager** then scroll and select **External memory**.
- 3 Touch **Format** and then confirm your choice.
- 4 Enter the password, if one has been set. The card will then be formatted and ready to use.


**NOTE:** If there is existing content on your memory card, the folder structure may be different after formatting since all files will have been deleted.

## Transferring your contacts









To transfer your contacts from your SIM to your phone:

- 1 From the Communication tab, scroll to **Contacts** and select  then **Change location**.
- 2 Touch **Copy to Handset**.
- 3 Choose **Select all** or select names one by one and touch **Copy to handset**.









# Menu map

Touch  in the home screen to open a **Top menu**. From here you can access further menus by scrolling through the icons: **Communication**, **Multimedia**, **Utilities** and **Settings**.









## COMMUNICATION

-  Contacts
-  Recent history
-  Browser
-  Messaging
-  Email
-  Dialling
-  Video call
-  Google









## MULTIMEDIA

-  Music
-  Camera
-  Video camera
-  Gallery
-  My stuff
-  Games & Apps
-  FM radio
-  Movie maker

## UTILITIES

-  Alarms
-  Organiser
-  Memo
-  Stopwatch
-  Voice recorder
-  Calculator
-  World clock
-  Tools

## SETTINGS

-  Profiles
-  Screen settings
-  Phone settings
-  Bluetooth
-  Wi-Fi
-  Call settings
-  Connectivity
-  Message settings

# Your home screen

From this screen you can access menu options, make a call, view the status of your phone and much more.

## Touch screen tips

The home screen is also a great place to get used to using the touch screen.


To select an item, touch the centre of the icon.

- Do not press too hard; the touchscreen is sensitive enough to pick up on a light, firm touch.
  - Use the tip of your finger to touch the option you require. Be careful not to touch any other keys.
  - When the screen light is off, either press the power key or hold down the Unlock/Lock key on the touch screen to return the home screen.
- Whenever your GD900 is not in use, it will return to the lock screen.


# Your home screen

## Customising the home screen

- 1 Shortcut home screen
- 2 Widget home screen (active)
- 3 Contact home screen
- 4 Multimedia home screen



- **Home screen customisation** - For each type of home screen you are able to add and remove objects by pressing & holding your finger on the screen, or if already added touching and holding one of the objects.



## Get in touch with your GD900

The User Interface is based on four types of Homescreens. To swap between the home screens just wipe quickly over display from left to right or from right to left.




**NOTE:** Use flicking to navigate without disturbing the display area.

# Your home screen

## Quick keys

The quick keys on your home screen provide easy, one-touch access to the functions you use the most.



Touch to bring up the touch dialling pad, which lets you make a call. Enter the number using the normal key pad and touch **Voice call** or tap .

To make a video call to this number, touch **Video Call** after entering the number.



Touch to open your contacts. To search for the number you want to call: Enter the name of the contact using the touchpad. You can also create new contacts and edit existing ones.



Touch to access the **Messaging** menu. From here you can create a new SMS.




Touch to open the full Top menu which is divided into four categories.

## Touch screen

The controls on the GD900 touch screen change dynamically, depending on the task you are carrying out.


### Opening Applications

To open any Application, simply touch its icon.



## Scrolling



Drag from side to side to scroll. On some screens, such as web pages, you can also scroll up or down.



# Your home screen

## Zooming In or Out

When viewing photos, web pages, emails, or maps, you can zoom in and out. Pinch your fingers together or slide them apart.







## Transparent Touchpad


Make the most of your Transparent Touchpad.

- 1 Touchpad Shortcut : You can assign a symbol for the most commonly used menus. Assign a symbol to each shortcut, so you can instantly access your favourite functions with simple finger gestures.



For example, if you draw  on the Transparent Touchpad, it will instantly go to Email.

- 2 Easy click : You can click on the Transparent Touchpad without covering the main screen while using the Web Browser.



[Browse with mouse pointer]


# Your home screen

- 3** Touch wheel: Adjust the volume or brightness by drawing ↶ and ↷ on the Transparent Touchpad in Music, Divx Playback, Camera and Video Camera. You can also zoom in or zoom out by drawing ↶ or ↷ on the Transparent Touchpad in Camera mode, and Video Camera mode.



[Zoom in/out]

- 4** Handwriting: Use your finger to write information on the Transparent Touchpad, without covering the main screen. In Handwriting mode you simply write on the screen and your GD900 will convert your handwriting into your message. If you select capital letter mode

(ABC), letters you type will be inserted as capital letters even if you write in small letters, and vice versa. Touch ▲ and Touch . You can write on the screen with your finger.

Letter	Strokes
A	A A a a
B	B B b b
C	C C
D	D D d d
E	E E e e
F	F F f f
G	G G g g
H	H H h h
I	I I i i
J	J J j j
K	K K k k
L	L l l
M	M M m m
N	N N n n
O	O O o o
P	P P p p

Letter	Strokes
Q	
R	
S	
T	
U	
V	
W	
X	
Y	
Z	
ß	

## Accented characters

Accent	Strokes
Space	
Backspace	
Enter	

## Punctuation marks

Mark	Strokes
Full stop	
At @	


## Numbers

Number	Strokes
0	
1	
2	
3	
4	
5	
6	
7	
8	
9	

# Your home screen

- 5 Normal Keypad : The Transparent Touchpad can also be used to input numbers and text in a familiar way.



- 6 Favourites : Display your favourite contacts, songs and photos on the screen by touching .





























**Note** The Transparent Touchpad is made of Tempered Glass.




















## Viewing the status bar

The status bar uses different icons to show conditions such as signal strength, new messages and battery life as well as whether Bluetooth or data connections is active.






Below is a table which explains the meaning of icons you're likely to see in the status bar.

Icon	Description
	No Service
	2G
	3G
	EDGE
	HSDPA
	Wi-fi is on
	Bluetooth Mono Stereo headset


Icon	Description
	Bluetooth Stereo headset
	Bluetooth Mono headset
	Bluetooth on
	Bluetooth Transfer
	Bluetooth Visibility
	Downloading
	Downloading complete.
	Downloading cancelled.
	In-call option
	Internet
	Searching
	Call divert
	Call reject
	Security
	Headset
	HomeZone
	Roaming
	Alarm
	Schedule (Calendar)

Icon	Description
	Multi-tasking
	Music paused
	Music playing
	FM radio playing
	Email being sent
	Email received
	MMS
	MMS sending
	MMS received
	SMS sending
	New voicemail
	New message
	Message sending has failed
	New email
	Push message
	Flight mode
	Outdoor
	Silent
	Customised ringtones 1-10

# Your home screen

Icon	Description
	Ringtone after vibration
	Ringtone with vibration
	External memory
	Battery status
	Projector/TV out




## Using the Multi - tasking function



Touch the multitasking hard key  to open the **Multitasking** menu. From here you can view some applications that are running and access them with one touch.


# Calls

**TIP!** Press the power key to lock the touchscreen to prevent calls being made by mistake.



## Making a call or a video call

- 1 Touch  to open the keypad.
- 2 Type in the number on the keypad. To delete a digit, press the clear key.
- 3 Touch the  key to make the call.
- 4 To end the call, touch the  key.


**TIP!** To enter + in order to make international calls, touch  twice, or press and hold down .

**TIP!** You can **Save number**, **Send message**, **Search contacts** by tapping .

## Calling your contacts

- 1 From the home screen touch  to open your **Contacts**.
- 2 Scroll through the contact list or enter the first letter(s) of the contact you want to call by touching .
- 3 From the list, touch the contact you want to call and select the number to use if there is more than one for that contact.
- 4 Touch **Voice call** or **Video call**.


## Answering and rejecting a call

When your phone rings, press the  hard key to answer.


Touch twice the  hard key to reject an incoming call.


# Calls


## In-call options




The screenshot shows an in-call interface with a status bar at the top displaying signal strength, Wi-Fi, and the time 06:41. Below the status bar, the text "Unmute" is visible. The main display area shows a timer at "00:52" and the name "Unknown". At the bottom, there are two rows of icons: a top row with a phone receiver, a microphone with a slash, a speaker, and a plus sign; and a bottom row with "Contacts", "Memo", and "Dialpad". Red lines connect these icons to their respective text descriptions on the right.


**Speaker** - Touch  to turn the speaker phone on.


**Mute** - Touch  to turn the microphone off so the person you are talking to cannot hear you.

**Hold** - Touch  to put a call on hold.

**Options** - Choose from a list of further in-call options, including creating new memo and going to messages, so you can check your messages and add contacts during a call. You can also end the call from here by touching End call.

 - Touch to open a numerical keypad for typing in numbers, e.g. when dialling call centres or other automated telephone services.

 - Add a memo during a call.

 - Search your contacts during a call.






## Adjusting call volume

To adjust the volume during a call, use the up and down button on the right side of the phone.




## Speed dialling

You can assign a frequently-called contact to a speed dial number.


- 1 From the home screen touch  to open your **Contacts**.
- 2 Touch  and select **Speed dials**.
- 3 Your voicemail is already set to speed dial 1. You cannot change this. Touch any other number to assign it to a speed dial contact.
- 4 Your contacts list will open. Select the contact you want to assign to that number by touching the phone number once.

To call a speed dial number, touch  on the home screen then press and hold the assigned number until the contact appears on the screen. The call will initiate automatically, without having to touch **Voice call**.

## Making a second call

- 1 During your initial call, touch  and select the number you want to call.
- 2 Call the number or search your contacts.
- 3 Touch  to connect the call.
- 4 Both calls will be displayed on the call screen. Your initial call will be locked and put on hold.
- 5 To end the call press .


# Calls




**NOTE:** You will be charged for each call you make.

## Turning off DTMF

DTMF lets you use numerical commands to navigate within automated calls. DTMF default is set to on.

To turn it off during a call (to make a note of a number) touch  and select **Disable DTMF**.

## Viewing your call logs

From the home screen, touch , then touch **Recent history** in

the Communication tab.

Choose from the following:


**All history** - View a complete list of all dialled, received and missed calls, voice calls only, video calls and messages.

**Missed calls** - View a list of all calls you have missed.

**Calls only** - View a list of all calls you have made and missed.


**Messages only** - View a list of all numbers that have received or sent texts and multimedia messages.

**VT only**- View a list of all video calls.

**TIP!** From any call log touch  and **Delete all** to delete all the recorded items.

**TIP!** Touch any single call log entry to view the date, time and duration of the call.


## Using call divert

- 1 Touch  and choose **Call settings** in the Settings tab.
- 2 Touch **Call divert** and select **Voice calls** and/or **Video calls**.
- 3 Choose whether to divert all call, when the line is busy, when there is no answer or when you cannot be contacted.
- 4 Touch **Activate** to activate.
- 5 Enter the number to divert to.

**NOTE:** Diverting calls will incur charges. Please contact your network operator for details.

**TIP!** To turn off all call diverts, choose **Deactivate all** from the **Call divert** menu.

## Using call barring


- 1 Touch  and choose **Call settings** in the Settings tab.
- 2 Touch **Call barring** and select **Voice calls** and/or **Video calls**.

- 3 Choose any or all of the five options:
  - All outgoing**
  - Outgoing international**
  - Outgoing international calls except home country**
  - All incoming**
  - Incoming when abroad**
- 4 Enter the call barring password. Please check with your network operator about this service.

**TIP!** Select **Fixed dial number** to turn on and compile a list of numbers which can be called from your phone. You'll need your PIN2 code, which is available from your operator. Only numbers within the fixed dial list can be called from your phone.

# Calls


## Changing the common call setting

- 1 Touch  and choose **Call settings** in the Settings tab.
- 2 Touch **Common settings**. This lets you change the following settings:
  - Call reject** - Slide the switch left for **ON**. You can touch the **Reject list** to choose all calls, specific contacts or groups or calls from unregistered numbers (i.e. not in your contacts) or No caller ID.
  - Send my number** - Choose whether to display your number on an outgoing call.
  - Auto redial** - Slide the switch left for **ON** or right for **OFF**.
  - Minute minder** - Slide the switch left to **ON** to hear a tone every minute during a call.
  - BT answer mode** - Select **Hands-free** to be able to answer a call using a Bluetooth headset, or

select **Handset** to press a handset key to answer a call.

**Save new number** - Select **ON** or **OFF** to save a new number.

## Changing your video call settings




- 1 From the home screen, touch  and scroll to **Call settings** in the Settings tab.
- 2 Touch **Video call settings** and select the settings for your video calls. Decide whether to use still image, then select one and/or switch on the mirror to see yourself on screen when making a video call.

# Contacts

## Searching for a contact



There are two ways to search for a contact:

### From the home screen


- 1 From the home screen, touch  to open your **Contacts**. Touch  and enter the contact name using the key pad.
- 2 Touch **Video call** or **Voice call** or the  key to place the call.

**TIP!** You can search by group by touching the Contacts tab at the top of the screen and selecting **Groups**. This will bring up a list of all your groups.


### From the main menu

- 1 Touch , then touch **Contacts** on the Communication tab.
- 2 Touch  and **Search**.

## Adding a new contact



- 1 From the home screen, touch  then select  and then touch **New contact** button.
- 2 Choose whether to save the contact to **Handset** or **USIM**.
- 3 If you want to add a picture to the new contact, touch **Add picture**.
- 4 Enter the first and last name of your new contact. You do not have to enter both, but you must enter at least one.
- 5 Enter up to five different numbers and assign a type to each of them, choosing between **Mobile**, **Home**, **Office**, **Pager**, **Fax**, **VT** and **General**.
- 6 Add an email address.
- 7 Assign the contact to one or more groups, choosing between **No group**, **Family**, **Friends**, **Colleagues**, **School** and **VIP**.

# Contacts

- 8 You can also add a **Ringtone**, **Homepage**, **Home address**, **Company name**, **Job title**, **Company address**, **Birthday**, **Anniversary** and a **Memo**.
- 9 Touch  to save the contact.

**TIP!** You can create customised groups for your contacts. See **Creating a group**.

## Creating a group

- 1 From the home screen, touch  and then touch **Contacts** in the Communication tab.
- 2 Touch **Contacts** on the top of the screen then touch **Groups** and select new group.
- 3 Enter a name for the new group.
- 4 Touch  to save the group.

**NOTE:** If you delete a group, the contacts assigned to that group will not be lost. They will remain in your contacts.

**TIP!** You can edit an existing group by touching the selected group once. Choose **View members**, **Edit the group**, **Send message**, **Send businesscard** or **Delete group**.

## Changing your contact settings

You can adapt your contact settings to suit your own preferences.

- 1 Touch **Contacts** on the Communication tab, select  and scroll to **Contact settings**.
- 2 From here, you can adjust the following settings:
  - Display name** - Choose whether to display the first or last name of a contact first.
  - Copy all** - Copy your contacts from your SIM to your handset, or vice versa. You can do this one contact at a time, or all at once.


**Move all** - This works in the same way as Copy, but the contact is stored at the new location only. Therefore, once a contact is moved from the SIM to the handset it will be deleted from the SIM memory.

**Clear contacts** - Delete all your contacts. Touch **Yes** if you are sure you want to delete all your contacts.

**Memory info** - View memory capacity information.

**TIP!** To add your own business card, select **My business card** and enter your details as you would for any contact. Touch **Save** icon to finish.

## Viewing information



- 1 Touch **Contacts** from the Communication tab select  and touch **Information**.
- 2 From here you can view **Service dial numbers**, **Own numbers**, **Memory info**. (memory space remaining) and **My business card**.

# Messaging


## Messaging

Your GD900 combines SMS, MMS into one intuitive, easy-to-use menu.


There are two ways of entering the messaging centre:


- 1 From the home screen, touch  or , then scroll to **Messaging** on the Communication tab.


## Sending a message

- 1 Touch  then **Write message** to open a blank message.
- 2 Touch **To** to enter the recipient's number, or open your contacts or favourites. You can add multiple contacts. When you are finished, touch the message box below to start composing the message text.
- 3 After entering the text, you can send the SMS by touching the send button on top of the message.

**TIP!** You will be charged for a text message for every person you send the message to.

- 4 Touch  **Insert** to add a text template, multimedia templates, emoticon, name & number, new slide, subject or signature.

 **WARNING:** The 160-character limit may vary from country to country depending on how the SMS is coded.


 **WARNING:** If an image, video or audio file is added to an SMS it will be automatically converted to an MMS, and you will be charged accordingly.






**Note** You can send SMS to many users at a time. Click on Contact and Select multiple from Options where in user can mark/unmark contacts for sending message. To send the SMS to a particular group of contacts click on Contacts tap and select Groups after composing the SMS.


## Entering text

Keypad.

 Touch to turn on T9 predictive texting.


 Touch to change the writing language.

  Tap to change between the number, symbol and text keypads.

Use  to scroll through the different keyboards in each text entry mode (e.g. capital or lower case letters).

To enter a space touch .

## T9 predictive

In T9 mode, you will see .

T9 mode uses a built-in dictionary to recognise your words based on the key sequences you touch. Simply touch the number key associated with the letter you want to enter, and the dictionary will predict the word you want to use.

For example, press 8, 3, 5, 3, 7, 4, 6, 6 and 3 to write 'telephone'.


## Abc manual

In Abc mode you have to touch the key repeatedly to enter a letter. For example, to write 'hello', touch 4 twice, 3 twice, 5 three times, 5 three more times, then 6 three times.

## Setting up your email


You can keep in touch on the move by using your GD900 to send emails. It's quick and simple to set up a POP3 or IMAP4 email account.

# Messaging

- 1 Touch  from the home screen, and scroll to **Email** on the Communication tab.
- 2 Touch **Write email**. If the email account is not set up, start the email set up wizard.

**TIP!** If an email account is already set up, the wizard is not activated automatically.

## Sending an email using your new account

- 1 Touch  from the home screen, and scroll to **Email** on the Communication tab to open a new blank message.
- 2 Enter the recipient's address and write your message. You can also attach images, videos, audio files and other file types.
- 3 Touch **Send email** to send your email.

**TIP!** During an active Wi-Fi connection, emails are sent and received via Wi-Fi.

## Changing your email settings

You can change your email settings based on your own preferences.

- 1 Touch  from the home screen, then scroll to **Messages settings** on the Settings tab.
- 2 Select **Email**.
- 3 You can alter the following settings:
  - Email accounts** - Manage your email accounts.
  - Allow reply email** - Choose whether to allow read confirmation messages to be sent.
  - Request reply email** - Choose whether to request read confirmation messages.

**Retrieve interval** - Select how often your GD900 checks for new email messages.

**Include message in Fwd & Reply**- Select to include the original message in any reply.

**Include attachment** - Select to include the original attachment in any reply.


**Auto retrieval when Roaming** - Choose whether to retrieve messages automatically when abroad (roaming).

**New email noti. info** - Choose whether to be alerted about a new e-mail with a pop-up message.

**Signature** - Create an email signature and switch this feature on.

## Message folders

You will recognise the folder structure in your GD900, and it is fairly self-explanatory.



**Inbox** - All messages you receive are stored in your inbox. From here you can view and delete them, among other functions.

**Outbox** - This is a temporary storage folder while messages are being sent.

**Sent** - Messages you sent are stored in this folder.

# Messaging

**Drafts** - If you don't finish writing a message, you can save what you've done in this folder.

**Threaded box** - Messages (SMS) exchanged with another party can be displayed in chronological order so that you can conveniently see an overview of your conversation.

**My Folders** - Create folders to store your messages.

## Using templates

Create templates for the SMS and MMS messages you send most often. There are already some templates on the phone, which you can edit.

- 1 When writing a new message, you can enter **Templates** from **Insert** in the options menu.
- 2 Choose **Text templates** or **Multimedia templates**. You can add, edit, delete or delete all templates. To edit a message, select it, amend it, and touch

**Save template.**

## Using emoticons

Liven up your messages using emoticons. There are some commonly used emoticons already on your phone.

- 1 When writing a new message, you can enter **Emoticons** from **Insert** in the options menu.
- 2 You can add a new emoticon by touching **New emoticon**.

## Changing your text message settings

Your GD900 message settings are pre-defined, so you can send messages immediately. These settings can be changed based on your preferences.

Scroll to **Message settings** on the Settings tab and touch **Text message**. You can changes to the following:

**Text message centre** - Enter the details of your message centre.

**Delivery report** - Slide the switch left to receive confirmation that your messages have been delivered.

**Validity period** - Choose how long your messages are stored at the message centre.

**Message types** - Convert your text into **Voice, Fax, X.400** or **Email**.

**Character encoding** - Choose how your characters are encoded. This affects the size of your messages and therefore your data charges.

**Send long text as** - Choose to send long messages as multiple SMS or MMS.

## Changing your multimedia message settings

Your GD900 message settings are pre-defined, so you can send messages immediately. These settings can be changed based on your preferences.

In **Setting** tap select **Message settings** and **Multimedia message**. You can make changes to the following:

**Retrieval mode** - Select **Home network** or **Roaming network**. If you then select Manual, you will only receive notifications about MMS messages. You can then decide whether or not to download them in full.

**NOTE:** Additional cost may occur when MMS are downloaded when roaming.

**Delivery report** - Choose whether to allow and/or request a delivery report.

# Messaging

**Read reply** - Choose whether to allow and/or send a read reply.

**Priority** - Choose the priority level of your MMS.

**Validity period** - Choose how long your message is stored at the message centre.

**Slide duration** - Choose how long slides appear on screen.


**Creation mode** - Restricted/  
Warning/ Free

**Delivery time** - Choose how long to wait before a message is delivered.

**Multimedia message centre** - Enter the details of your message centre.

## Changing your other settings

Scroll to **Message settings** on the Settings tab then:

**Voicemail** - Touch **New profile** or  to add a new Voicemail service. Contact your network operator for more information about the service they provide.


**Service message** - Choose whether to receive or block service messages. You can also set message security levels by creating trusted and not trusted sender lists.

**Info. service** - Choose your reception status, language and other settings.

# Camera

## Getting to know the viewfinder

Open the slide to use the Outer Camera.



**Back** - Touch here to return to the menu map.

**Camera mode** - Shows whether the camera is in video or photo mode, and can also be used to take photos.

**Gallery** - Touch this icon to view the gallery.

**Exposure** - See Adjusting the Exposure on page 48.

**Macro** - Switch this on to take close up shots.

**Flash status** - Set flash light mode to Auto, Always off or Always on.

**Settings** - Touch this icon to open the settings menu. See Using the advanced settings on page 49 for details.

**TIP!** You can close all the shortcut options to give a clearer viewfinder screen. Just touch the centre of the viewfinder once. To recall the options, touch the screen again.

# Camera

## Taking a quick photo


- 1 Press and hold down the camera key on the right side of the phone.
- 2 Holding the phone horizontally, point the lens towards the subject you want to take a picture of.
- 3 Press the capture button lightly and a focus box will appear in the centre of the viewfinder screen.
- 4 Position the phone so you can see the photo subject in the focus box.
- 5 When the focus box turns green, the camera has focused on your subject.
- 6 Press the capture button and hold it down.

### TIP! Face Tracking

This automatically detects and focuses on human faces to help you take clearer pictures.

## Once you've taken the photo

Your captured photo will appear on the screen. The image name is shown with four icons on the right-hand side.



**Send** Touch to send the photo as a **Message, Email, Bluetooth** or **Blogger**. See page 38 for Sending a message, and page 97 for Sending and receiving your files using Bluetooth.


**NOTE:** Additional cost may occur when MMS are downloaded when roaming.

**Use** Touch to use the image as wallpaper.





**Rename** Touch to edit the name of the selected picture.

**Edit** Touch to edit the image using various tools.

 Touch to return to the previous menu.


 Touch to delete the image.

 Touch to take another photo immediately. Your current photo will be saved.

 Touch to view a gallery of your saved photos.

## Using the flash




The default flash setting is auto, but there are other options.


- 1 Select  from the left side of the viewfinder to enter the flash sub-menu.
- 2 There are three flash options:
  - Auto** - Your camera will assess the light available for a good picture and use the flash as necessary.
  - Always off** - The camera will never flash. This is useful if you want to save battery power.
  - Always on** - The camera will always flash.
- 3 When you touch the option you want, the flash menu will automatically close, allowing you to take a picture immediately.
- 4 The flash status icon in the viewfinder will change, based on the new flash mode.

# Camera

## Adjusting the exposure

The exposure defines the difference between light and dark areas in an image. A low contrast image will appear foggy, whereas a high contrast image will appear much sharper.

- 1 Touch .
- 2 Slide the contrast indicator along the bar towards  for a lower exposure and hazier image or towards  for a higher exposure and a sharper image.


Or make a clockwise touch wheel on the Transparent Touchpad for higher exposure and an anti-clockwise one for lower exposure. You need to activate the contrast indicator first by touching .

## Adjusting the zoom


You can also zoom in or zoom out. Just make a clockwise touch wheel on the Transparent Touchpad to zoom in, and an anti-clockwise one to zoom out.



## Taking a continuous shot

- 1 From the viewfinder, touch  to open all advanced settings options and select **Shot mode** and **Continuous shot**.
- 2 Position the subject in the viewfinder and press the capture button as if taking a normal photo.
- 3 The camera will take shots in quick succession.

## Using the advanced settings

From the viewfinder, touch  to open all advanced settings options. You can change the camera setting by scrolling the wheel. After selecting the option, touch the **OK** button.

**Swap camera** - For self portraits, switch to the LG GD900's inner camera.

**Image size** - Change the size of the photo to save memory space or to take an appropriately sized picture for a contact. See **Changing the image size** on page 51.

**Colour effect** - Choose a colour tone to use on your new photo. See **Choosing a colour effect** on page 51.

**White balance** - Choose between **Auto, Incandescent, Sunny, Fluorescent** and **Cloudy**.

**Timer** - The self-timer allows you to set a delay after the shutter is pressed. Select **Off, 3 seconds, 5 seconds** or **10 seconds**. This is ideal if you want to be included in a photo.

**Shot mode** - Choose the normal or continuous shot mode.

# Camera

**ISO** - The ISO rating determines the sensitivity of the camera's light sensor. The higher the ISO, the more sensitive the camera will be. This is useful in darker conditions when you can not use the flash. Select the ISO value from **Auto, 100, 200, 400, 800** and **1600**.

**Image quality** - Choose between **Super fine, Fine** and **Normal**. The finer the quality, the sharper the photo. However, the file size will increase as a result, which means you'll be able to store fewer photos in your memory.

**Memory in use** - Choose whether to save your photos to the Handset memory or the External memory.

**Hide icons** - Choose the camera settings icons to be hidden manually or automatically.

**Image stabilization** - Enables you to take a photo without the camera wobbling or shaking.

**Auto focus** - Select the way the camera will focus. Choose between **Spot, Manual** and **Face tracking**.

**Shutter sound** - Select one of the four shutter sounds.

**Grid view** - Choose between **Off, 2x2 grid** or **3x3 grid**.


**Reset** - Restore all camera default settings.

**TIP!** When you exit the camera all settings will return to their defaults, except image size and image quality. Any non-default settings will need to be reset, such as colour tone and ISO. Check these before you take your next photo.

**TIP!** The settings menu is superimposed over the viewfinder, so when you change elements of the image colour or quality you will see a preview of the image change behind the settings menu.

## Changing the image size

The more pixels, the larger the file, which means the files take up more memory space. If you want to store more pictures on your phone, you can change the resolution to make the files smaller.

- 1 Using the viewfinder, touch  in the top left corner.
- 2 Select **Image size** from the Preview menu.
- 3 Select a pixel value from the six options. (**8Mega, 5Mega, 3Mega, 2Mega, 1Mega, VGA(640X480), Wallpaper, QVGA(320X240), MMS, Contacts**)



## Choosing a colour effect


- 1 Using the viewfinder, touch  in the top left corner.
- 2 Select **Colour effect** from the Preview menu.
- 3 There are five colour tone options: **Off, Sepia, Mono, Negative, Emboss.**
- 4 Once you've made your selection, the colour tone menu can be closed by selecting the OK button. You are then ready to take a picture.


# Camera


**TIP!** You can change a picture taken in colour to black and white or sepia, but you cannot change a picture taken in black and white or sepia to colour.

## Using the inner camera


Your LG GD900 has an inner 640x480 camera for both video calls and taking photos.

- 1 To switch to the inner camera touch  then select Swap camera and select Secondary.
- 2 After a few seconds you'll see yourself in the viewfinder. To capture the image, press the side button as normal.

**TIP!** The inner camera has fewer settings as it has no flash nor adjustable sensitivity. You can still alter the image size, colour effect, image quality, white balance and set the self-timer by touching  in the same way as when using the main camera.

- 3 After you've taken the photo you'll be offered all the same options as for an image taken with the main camera.
- 4 To return to the main camera touch  and then select Swap camera and select Main.


## Viewing your saved photos

- 1 You can access your saved photos from within the camera mode. Just touch  and your gallery will appear on the screen.

# Video camera

## Getting to know the viewfinder

Open the slide to use the Outer Camera.



**Back** - Touch here to return to the home screen.

**Start recording**

**Gallery** - Touch this icon to view the gallery.

**Exposure** - See Adjusting the Exposure on page 55.

**Recording speed**





**Flash status** - Set or turn off the flash.

**Settings** - Touch this icon to open the settings menu. See Using the advanced settings on page 55 for details.

**TIP!** You can close all shortcut options to give a clearer viewfinder screen. Just touch the centre of the viewfinder once. To recall the options, touch the screen again.

# Video camera

## Shooting a quick video

- 1 Press and hold down the camera key on the right side of the phone.
- 2 Then, switch to . Or, you can enter this menu directly by touching **Video camera**.
- 3 The video camera's viewfinder will appear on the screen.
- 4 Holding the phone horizontally, point the lens towards the subject of the video.
- 5 Press the capture button once to start recording.
- 6 **Rec** will appear at the bottom of the viewfinder with a timer showing the length of the video.
- 7 To pause the video, touch  and resume recording by selecting .
- 8 Touch  on the screen to stop recording.

## After shooting a video

A still image representing your video will appear on the screen. The name of the video will be shown on the bottom of the screen, along with four icons on the right-hand side.



**Play** Touch to play the video.


**Send** Touch to send the video as a **Message, Email, Bluetooth, and YouTube**. See page 38 for Sending a message, and page 97 for Sending and receiving your files using Bluetooth.


**NOTE:** Additional cost may occur when MMS are downloaded when roaming.





**Use** Touch to use the image as wallpaper.

**Rename** Touch to edit the name of the selected video.

 Touch to return to the previous menu.

 Touch to delete the video you have just made, and confirm by touching **Yes**. The viewfinder will reappear.



 Touch to shoot another video immediately. Your current video will be saved.

 Touch to view the saved videos and pictures gallery.

## Adjusting the exposure

The exposure defines the difference between light and dark areas in an image. A low contrast image will appear foggy, whereas a high contrast image will appear much sharper.

1 Touch  .

2 Slide the exposure indicator along the bar, towards  for a lower exposure and fuzzier image, or towards  for a higher contrast and sharper image.



## Using the advanced settings

Using the viewfinder, touch **Settings** to open all the advanced settings options.

You can adjust the video camera setting by scrolling the wheel. After selecting the option, touch the **OK** button.

**Swap camera** - Switch to your LG GD900's inner camera to record yourself on video. See **Using the inner video camera** on page 58 for details.

**Video size** - Change the size of the video to save memory space. See

## Video camera

**Changing the video image size** on page 57.

**Scene mode** - Choose between **Auto** or **Night mode**.

**Colour effect** - Choose a colour tone to use on your new view. See **Choosing a colour tone** on page 58.

**White balance** - The white balance ensures any white parts of your video are realistic. To enable your camera to adjust the white balance correctly, you may need to determine the light conditions. Choose between **Auto**, **Incandescent**, **Sunny**, **Fluorescent** or **Cloudy**.

**Video quality** - Choose between **Super fine**, **Fine** and **Normal**. The finer the quality, the sharper the video will be. The file size will increase as a result, meaning you'll be able to store fewer videos in the phone's memory.

**Duration** - Set a duration limit for your video. Choose between **Normal** and **MMS** to limit the maximum size to send as an MMS.

**TIP!** If you choose MMS duration, choosing a lower image quality will enable you to shoot a longer video.

**Memory in use** - Choose whether to save your videos to the Handset memory or to the External memory.


**Voice** - Choose Mute to record a video without sound.

**Hide icons** - Select whether to hide the icons on the camera menu automatically or manually.

**Reset** - Reset all the video camera settings.

## Changing the video image size

The more pixels, the larger the file size, which means the files take up more memory space. If you want to store more videos on your phone, you can change the video resolution to make the files smaller.

- 1 Using the viewfinder, touch  in the top left corner.
- 2 Select **Video size** from the Preview menu.
- 3 Select a pixel value from the four options:
  - 720X480(D1)** - The highest quality, widescreen option.
  - 640x480** - Standard sized VGA.
  - 320x240** - Smaller image size, and therefore a smaller file size. This is ideal for saving memory space.
  - 176x144** - Smallest image size and therefore the smallest file size.


- 4 Touch the OK button to return to the viewfinder.

**TIP!** The great editing software on your LG GD900 is compatible with all video types except 720X480 (D1). Don't record in this format if you plan to edit your video.

**TIP!** For video format conversion software, see the CD that came with your GD900.

# Video camera

## Choosing a colour tone

- 1 Using the viewfinder, touch  in the top left corner.
- 2 Select **Colour effect** from the Preview menu.
- 3 There are six colour tone options, **Off, Sepia, Mono, Negative** or **Emboss**.
- 4 Touch the colour tone you want to use.

**TIP!** You can change a video shot in colour to black and white or sepia, but you cannot change a video shot in black and white or sepia to colour.


## Using the inner video camera

Your LG GD900 has an inner 320x240 camera for both video calls and recording videos.

- 1 To switch to the inner camera, touch  then select Swap camera and select Secondary.
- 2 After a few seconds you'll see yourself in the viewfinder. To start recording the image press the capture button as normal, and press it again to stop recording.
- 3 After you have shot the video, you'll be offered all the options available for a video shot using the main camera.
- 4 To return to the main camera touch  and select Swap camera and select Main.

**TIP!** You can still alter the image size, colour effect, white balance and quality by touching **Settings** in the same way as when using the main camera.

## Watching your saved videos

- 1 In the viewfinder, touch .
- 2 Your gallery will appear on the screen.
- 3 Touch a video once to bring it to the front of the gallery. It starts to play automatically.

## Watching your videos on TV


Connect your GD900 to your TV using the TV output cable.

**NOTE:** The TV output cable is available for purchase separately.

**TIP!** All formats except 320x240 and 176x144 are compatible with playing the video through a TV.


# Your photos and videos

## Viewing your photos and videos

- 1 Touch  on the camera preview screen.
- 2 Your gallery will appear on the screen.
- 3 Touch the video or photo to open it fully.



**TIP!** Flick left or right to view other photos or videos.

**TIP!** To delete a photo or video, open it and select . Touch **Yes** to confirm.

## Using zoom when viewing a video or photo

When viewing photos or videos, you can zoom in and out by pinching your fingers together or spreading them apart.

## Adjusting the volume when viewing a video

To adjust the volume of a video while it is playing, touch the volume bar on the screen bottom after pressing the loudspeaker symbol. Alternatively, use the volume keys on the side of the phone.

## Setting a photo as wallpaper

- 1 Touch the photo you want to set as wallpaper to open it.
- 2 Touch the screen to open the options menu.
- 3 Touch **Use as**.
- 4 The screen will switch to portrait mode. You can zoom in and out and move the cropped section of

the picture using a thumbnail at the bottom of the screen.

## Editing your photos

You can do lots of great things to your photos to change them, add to them or liven them up.

- 1 Open the photo you want to edit and touch **Edit** to show the options.
- 2 Touch the icons to alter your photo:



Crop your photo. Choose a square or circular crop area and move your finger across the screen to select the area.



Draw something on your photo, freehand. Select the line thickness from the four options, then the colour you want to use.



Adding writing on a picture. See **Adding text to a photo** on page 62.



Decorate your photo with stamps. Choose from the different stamps and touch your photo where you want to place them.



Erase the editing you have done to the picture. You can choose the size of eraser you use.



Touch to return to the gallery.



Save the changes you made to the photos. Select to save the changes as an **Original file** or a **New file**. If you select **New file** enter a file name.



Erase the editing you have done to the photo.




Touch to open further effect options including **Rotate**. There are also more advanced editing options.

# Your photos and videos


**Filter** Touch to apply the effect options to a photo.

**Adjustment** This helps to adjust a picture taken using automatic colour, brightness etc.



## Adding text to a photo


- 1 From the editing screen, touch **T**.
- 2 Select **Text** to add unframed text or choose one of the speech bubble shapes.
- 3 Enter your text using the keypad and touch **Save**.
- 4 Move the text by touching it and sliding it to where you want it.



## Adding an effect to a photo

- 1 From the editing screen, touch **Filter**.
- 2 You can apply any of the various options to the photo
- 3 To undo an effect simply touch **Undo**.

## Cropping a photo

- 1 From the editing screen, touch .
- 2 Choose the shape you want to use to crop the picture.
- 3 Drag the box over the area you want to crop.



- 4 When you are finished with your selection, touch **Save**.

## Adding a colour accent to a photo

- 1 From the editing screen, touch **Image**.
- 2 Choose **Colour Accent**.
- 3 Select part of the photo. A traced line will appear around everything in that area which is the same or a similar colour, for example, a person's hair or jumper.
- 4 Alter the intensity of the accenting by touching **Intensity** and touch '+' or '-' button.
- 5 Touch **OK**.
- 6 All colour will be removed from the photo, apart from in the section marked for colour accenting.
- 7 Select **Save** to save the changes.

## Swapping colours in a photo

- 1 From the editing screen, touch **Image**.
- 2 Choose **Colour swapping**.
- 3 Select part of the photo. A traced line will appear around everything in that area which is the same or a similar colour. For example, someone's hair or jumper.
- 4 Select a colour.
- 5 Press **OK**.
- 6 The part of the photo selected for colour accenting will change to the selected colour.
- 7 Select **Save** to save the changes.








## Editing your videos

The video editing features are available for MPEG4 types except 720x480 (D1) resolution.

Don't record in these formats if you plan to edit your video.


# Your photos and videos


## Trimming the length of the video

- 1 Open the video you want to edit, touch  option key.
- 2 Select  and choose **Trim/Multi trim**.
- 3 Touch  and set the new start and end points using .
- 4 Touch  to confirm you are satisfied with the new cut.
- 5 Touch  or, alternatively, touch  to return to the gallery and discard the changes.



## Merging two videos

- 1 Open the video you want to edit, touch  option key.
- 2 Select  and choose **Video merge**.
- 3 The My videos folder will open. Choose the video you want to merge.
- 4 Touch and slide the photo to move it to the end or the beginning of the video.
- 5 Touch **Preview** to view the merged video.





- 6 Press **Save** then **New file** to save the new merged video. Replace the existing file or save as a new file.

- 7 Repeat these steps to merge more videos.

## Merging a photo with a video

- 1 Open the video you want to edit, touch  option key.
- 2 Select **Edit** and choose **Image merge**.
- 3 The My images folder will open. Choose the photo you want to move into your video and touch **Select**.
- 4 Touch and slide the photo to merge it to the end or the beginning of the video.
- 5 Touch **Preview** to choose how the photo and video merge together.
- 6 Press **Save** then choose to replace the existing file or save as a new file.
- 7 Repeat these steps to merge more photos.

## Adding text to a video

- 1 Open the video you want to edit, touch  option key.
- 2 Select **Edit** and select **Text overlay**.
- 3 Touch  and pause playback for setting the start point for text appearance.
- 4 Touch **Start** and choose the text styles. Enter your text using the keypad and select **OK**.
- 5 Touch the area of the screen you want the text to appear and touch **OK**.





- 6 Touch **Save**. Replace the existing file or save as a new file.

# Your photos and videos

7 Repeat these steps to add more text.

## Overlaying a photo


- 1 Open the video you want to edit, touch  option key.
- 2 Select **Edit** and choose **Image overlay**.
- 3 The My images folder will open. Choose the photo you want to overlay on your video.
- 4 Touch  and pause when you want the picture to appear, then select **Opacity** after touching the **Start** button.
- 5 Touch **OK** and then press **End** when the photo overlay shall be stopped.
- 6 Touch the area of the screen in which you want the text to appear. If the photo is too big it will overlay the whole screen, not just the selected area.
- 7 Touch **Save**. Replace the existing file or save as a new file.

8 Repeat these steps to add more photos.

## Adding a soundtrack to your video


- 1 Open the video you want to edit, touch  option key.
- 2 Select **Edit** and choose **Audio dubbing**.
- 3 The My sounds folder will open. Choose the track you want to add to your video.
- 4 The original audio track on your video will be erased.
- 5 If the audio is shorter than the video, choose whether to play it **Once** or **Repeat** it.
- 6 Replace the existing file or save as a new file.

## Adding live sound to your video


- 1 Open the video you want to edit, touch  option key.
- 2 Select **Edit** and choose **Live dubbing**.
- 3 Set the sound value to original sound or recording sound.



## Changing the video speed


- 1 Open the video you want to edit, touch  option key.
- 2 Select **Edit** and choose **Time scaling**.
- 3 Select one of the options. This can vary depending on the frame rate.
- 4 Replace the original file or save as a new file.


## Adding a dimming effect

- 1 Open the video you want to edit, touch  option key.
- 2 Select **Edit** and choose **Dimming Effect**.
- 3 Your video will now fade in at the start and fade out at the end.
- 4 Replace the original file or save as a new file.

# Multimedia

You can store multimedia files in your phone's memory so you have easy access to all your pictures, sounds, videos and games. You can also save your files to a memory card. Using a memory card allows you to free up space in your phone's memory.

To access the Multimedia menu, touch  select **My stuff** from Multimedia tab. You can open a list of the folders that store all your multimedia files.

**TIP!** To delete any files in My stuff, touch  then **Delete**.

## Pictures

**My images** contains a list of pictures including default images pre-loaded onto your phone, images you have downloaded and those taken on your phone's camera.

## My images options menu

The options available to you in **My images** depend on the type of image you have selected. All options will be available for pictures you have taken on the phone's camera, but only the **Set favorites**, **Sort by**, **Slide show** and **Memory info** options are available for default images.

## Sending a photo

- 1** To send a photo just select picture you want.
- 2** Touch **Send**. Choose between **Message**, **Email**, **Bluetooth** or **Blogger**.
- 3** If you choose **Message** or **Email**, your photo will be attached to a message and you can write and send the message as normal. If you choose **Bluetooth**, your phone will search for a device to send the picture to.

## Using an image

You can choose images to use as wallpapers and screensavers, or even to identify a caller.

- 1 Touch  then select **My stuff** from Multimedia tab.
- 2 Touch **My images**.
- 3 Select an image and touch  .
- 4 Touch **Use as** and choose between:

**Homescreens** - Set a wallpaper for All homescreens, Widget, Contacts or Multimedia.

**Lock screen** - Set a wallpaper for the key lock screen.

**Contacts image** - Allocate an image to a person in your contacts list, so the picture is displayed when they call you.


**Start up image** - Set an image to appear when you switch the phone on.

**Shut down image** - Set an image to appear when you switch the phone off.

**Outgoing call image** - Set an image to appear during outgoing calls.

**Incoming call image** - Set an image to appear during incoming calls.



## Printing an image

- 1 Touch  then select **My stuff** from Multimedia tab.
- 2 Touch **My images**.
- 3 Select an image and touch  .
- 4 Touch **Print**, then choose between **Bluetooth** and **PictBridge**.

# Multimedia



## Moving or copying an image

An image can be moved or copied between the phone memory and the memory card. You may want to do this to clear some space in one of the memories, or to safeguard your images against loss.

- 1 Touch  then select **My stuff** from Multimedia tab.
- 2 Touch **My images**.
- 3 Touch  .
- 4 Select **Move** or **Copy**.



## Creating a slide show

If you want to view all the images on your phone, you can create a slide show to save you having to open and close each individual image.

- 1 Touch  then select **My stuff** from Multimedia tab.
- 2 Touch **My images**.
- 3 Touch  then **Slide show**.

## Checking your memory status

You can check to see how much memory space you have used and how much you have left.


- 1 Touch  then select **My stuff** from Multimedia tab.
- 2 Touch **My images**.
- 3 Touch  then **Memory info**.

## Sounds

The **My sounds** folder contains Downloaded sounds, **Default sounds** and **Voice recordings**.

From here you can manage or send sounds or set them as ringtones.

## Using a sound

- 1 Touch  then select **My stuff** from Multimedia tab.
- 2 Touch **My sounds**.
- 3 Select **Default sounds** or **Voice recordings**.




- 4 Select a sound and touch the play icon. It will start to play.
- 5 You can use the sound for various tones by selecting the **Use as** menu.
- 6 Choose between **Voice ringtone**, **Video ringtone** and **Message tone**.

## Videos

The **My videos** folder shows a list of videos you have downloaded or recorded on your phone.


Watching a video

- 1 Touch  then select **My stuff** on the Multimedia tab.
- 2 Touch **My videos**.
- 3 Select a video to play.

**TIP!** GD900 supports both DivX & Xvid video format playback to ensure greater content availability. Refer to page 88 for detail.

**NOTE:** The TV output cable is available for purchase separately.

## Sending a video clip


- 1 Select a video and touch .
- 2 Touch **Send** and choose between **Message**, **Email**, **Bluetooth** and **YouTube**.
- 3 If you choose **Message** or **Email**, your video clip will be attached to the message, which you can write and send as normal. If you choose **Bluetooth**, your phone will search for a device to send the video to.

## Games and Applications

You can download new games and applications to your phone to keep you enjoy.

# Multimedia

## Playing a game

- 1 Touch  then select **Games & Apps** on the Multimedia tab.
- 2 Touch **Games** or **Applications** menu.
- 3 Touch Launch button to launch a game or an application.

## Using the options menu


Within Games and Application folders, the following options are available:

- **New folder:** Create a folder within Games or Applications
- **Sort by:** Sort the games and applications by Date, Name, Size or Memory
- **Memory info:** View the memory status handset or external memory.
- **Folder info.:** View the folder information.
- **Data Wallet:** This application is used to keep personal informations. (Bank Account

/ Credit Card / Loan / Email ID details)

- **LG Help Desk:** This application has all India LG Mobile service centre / Call Centre numbers directory.

## Installing a Java game and application

- 1 Touch  then select **My stuff** on the Multimedia tab.
- 2 If you insert new memory card, touch External Memory menu.
- 3 Select the file(\*.jad or \*.jar) you want to install and touch **Install**.


## Use the M-Toy menu

M-Toy contains preloaded flash games which use the integrated motion sensor.

## Flash contents

The Flash contents folder contains all of your default and downloaded SWF files.


## Viewing an SWF/ SVG file

- 1 Touch  then select **My stuff** from Multimedia tab.
- 2 Touch **Flash contents**.
- 3 Select the file you want to view.

## Documents

This is possible with your Excel, PowerPoint, Word, Text and pdf files.

## Viewing a file

- 1 Touch  then select **My stuff** from Multimedia tab.
- 2 Touch **Documents**.
- 3 Select a document and touch **View**.

## Transferring a file to your phone

Bluetooth is probably the easiest way of transferring a file from your computer to your phone. You can also use LG PC Suite via your sync cable, see page 84 for details.

To transfer files (e.g. music) using Bluetooth:


- 1 Make sure your phone and computer have Bluetooth switched on and are within range of each other.
- 2 Use your computer to send the file via Bluetooth.
- 3 When the file is sent, accept it on your phone by touching **Yes**.
- 4 The file should appear in your **Documents** or **Others** folder.

## Others


The **Others** folder is used to store files that are not pictures, audio files, videos, games or applications. It is used in the same way as the **Documents** folder. You may find that when you transfer files from your computer to your phone that they appear in the **Others** folder. If this happens, you can move them.

# Multimedia

## Creating a movie

- 1 Touch  then select **Movie maker** from Multimedia tab.
- 2 Touch **Insert** to add an image.
- 3 Touch the **Style** tab on the top to choose a movie style.
- 4 Touch the **Sound** tab on the screen to change the sound, e.g. for a voice recording.
- 5 Touch the **Preview** button to see the results.
- 6 Touch the **Play Order** tab on the screen to change the order.
- 7 Touch the **Saved in** tab on the screen to choose where to save the movie, and touch the **Usage** tab to choose between storing it and MMS.
- 8 To save your movie, press play and then touch **Save movie**.

## Music

Your LG GD900 has a built-in music player that lets you play all your favourite tracks. To access the music player, touch  then select **Music** from Multimedia Tab. From here, you can access a number of folders:

**All tracks** - Contains all the songs you have on your phone.

**Favorites** - Contains the songs you have saved as favourites.

**Artists** - Browse your music collection by artist.

**Albums** - Browse your music collection by album.

**Genres** - Browse your music collection by genre.

## Transferring music onto your phone



The easiest way to transfer music onto your phone is via Bluetooth or the data cable.

You can also use LG PC Suite, see page 84 for details. To transfer music using Bluetooth:

- 1 Make sure both devices have Bluetooth switched on and are connected to each other.
- 2 Select the music file on the other device and select send via Bluetooth.
- 3 When the file is sent, you will have to accept it on your phone by touching **Yes**.
- 4 The file should appear in **Music > All tracks**.

## Playing a song

- 1 Touch  then select **Music** from the Multimedia tab.
- 2 Touch **All tracks**.
- 3 Select the song you want to play then touch .
- 4 Touch  to pause the song.
- 5 Touch  to skip to the next song.
- 6 Touch  to go back to the previous song.
- 7 Touch  to return to the **Music** menu.

To change the volume while listening to music, touch . Or make a clockwise touch wheel on the Transparent Touchpad to turn up the volume and an anti-clockwise one to turn down the volume. You need to activate the volume indicator first by touching .


# Multimedia

## Creating a playlist



You can create your own playlists by choosing a selection of songs from the **All tracks** folder.

- 1 Touch  then select **Music** from the Multimedia tab.
- 2 Touch the  option icon.
- 3 Touch **New playlist**, enter the playlist name and touch .
- 4 The All tracks folder will be displayed. Touch all of the songs that you would like to include in your playlist; a tick will appear next to these track names.
- 5 Touch **Add songs**.

To play a playlist, select it and touch Play.

**NOTE:** To add a second playlist, touch  then New playlist.

## Deleting a playlist

- 1 Touch  then select **Music** from the Multimedia tab.
- 2 Touch the  option icon.
- 3 Touch **Delete** or **Delete all** to delete all of the playlists.

## Using the radio

Your LG GD900 has an built-in FM radio feature so you can tune into your favourite stations and listen on the move.



**NOTE:** You will need to attach your headphones to listen to the radio. Insert them into the headphone socket.



## Searching for stations

You can tune your phone to radio stations by searching for them manually or automatically. They will then be saved to specific channel numbers, so you don't have to keep re-tuning. You can store up to 30 channels on your phone.



### To tune automatically

- 1 Touch  then select **FM radio** from Multimedia tab.
- 2 Touch  .

- 3 Touch **Auto scan** then **Yes**. The stations found will be allocated to channel numbers in your phone by selecting **Set**, **Skip** and **Stop**.


**NOTE:** You can also manually tune to a station by using the wheel displayed next to the radio frequency.

## Resetting channels

- 1 Touch  then select **FM radio** from Multimedia tab.
- 2 Touch  .
- 3 Choose **Reset channel** to reset the current channel or choose **Reset all channels** to reset all of the channels. If you reset all of the channels, each channel will return to the starting 87.5MHz frequency.

# Multimedia

## Listening to the radio

- 1 Touch  then select **FM radio** from Multimedia tab.
- 2 Touch the channel number of the station you would like to listen to.

**TIP!** To improve radio reception, extend the headset cord, which functions as the radio aerial.


**Warning!** If you connect the headset not specifically made for it to the phone, the radio reception can be interfered.




# Organiser



## Adding an event to your calendar

- 1 From the home screen select  then scroll to **Organiser** on the Utilities tab.
- 2 Select the date to which you want to add an event.
- 3 Touch  then **New schedule**.
- 4 Touch **Category** then choose between **Appointment**, **Anniversary** or **Birthday**. Check the date and enter the time you want your event to begin.
- 5 For appointments and anniversaries, you can enter the time and date the event finishes in the lower time and date boxes.
- 6 If you would like to add a subject or note to your event, touch **Subject** and type in the details.
- 7 Select **Set alarm** to set an alert for the event. If you want to repeat the alarm, select **Set repeat**.

- 8 Touch  to save the event in the calendar. A coloured square in the calendar will mark all days that have saved events, and an alarm will sound at the event start time, to help you staying organised.




**TIP!** You can enter holidays in your calendar. Individually touch each day of the holiday, then touch  and select **Set holiday**. Each day will be marked in red.

## Changing your default calendar view

- 1 From the home screen select  then scroll to **Organiser** on the Utilities tab. Select **Settings** in .
- 2 Touch **Default view** and choose Calendar, Week, Timetable, List or All tasks.

# Organiser

## Adding an item to your To Do list



- 1 From the home screen select  then scroll to **Organiser** on the Utilities tab.
- 2 Select , select **New task** and touch **Note**.
- 3 Set the date for the task, add notes, then select its priority level: **High**, **Medium** or **Low**.
- 4 Save the task by selecting .

**TIP!** You can back up and synchronise your calendar with your computer. See PC Sync on page 84.


## Using the date finder

Date finder is a handy tool to help you calculate what the date will be once a certain number of days have passed. For example, 60 days from 10.10.09 will be 09.12.2009.



This helps you keeping track of deadlines.

- 1 From the home screen select  then scroll to **Organiser** on the Utilities tab.
- 2 Select , select **Date finder**.
- 3 Set the required date in the **From** tab.
- 4 In the **After** tab set the number of days.
- 5 The **Target date** will be shown below.

## Setting your alarm

- 1 From the home screen select  then scroll to **Alarms** on the Utilities tab.
- 2 If you want add a new alarm, touch **New alarm**. If you want to set the alarm to sound again within one hour, touch **Quick alarm**.
- 3 Set the time you would like the alarm to sound.
- 4 Choose whether you want the alarm to repeat, set the repeat and type.  
The icons indicate the weekday you select.
- 5 Select **Sound/Vibration** to select the type of alarm you want.
- 6 Touch **Alarm bell** for selecting the alert melody or sound. To listen to the sounds, touch the sound, followed by ►.
- 7 Add a memo to the alarm.

## Adding a memo

- 1 From the home screen select  then scroll to **Memo** on the Utilities tab.
- 2 Touch **New memo**.
- 3 Type your memo, then touch .


**TIP!** You can edit an existing memo. Select the one to be edited, touch **Edit** and type in your changes.


## Voice recorder

Use your voice recorder to record voice memos or other audio files.

# Organiser

## Recording a sound or voice

- 1 Touch .
- 2 Touch **Voice recorder** in Utilities tap.
- 3 Choose where to save the recording between Handset and External.
- 4 Choose recording mode between General and MMS.
- 5 Touch **Rec.** to begin recording.
- 6 Touch **Stop** to end recording.





- 7 If you want to re-record the voice, touch **New**.

## Sending the voice recording


- 1 Once you have finished recording, you can send the audio clip by touching **Send**.
- 2 Choose **Message, Email** or **Bluetooth**. If you choose **Message** or **Email**, the recording will be added to the message which you can write and send it as normal. If you choose **Bluetooth**, your phone will search for a device to send the voice recording to.

## Using your calculator


- 1 From the home screen select , then scroll to **Calculator** on the Utilities tab.
- 2 Touch the number keys to enter numbers.
- 3 For simple calculations, touch the function you require (+, -, x or ÷), followed by =.

- 4 For more complex calculations, touch  and choose between **sin, cos, tan, deg, log, etc..**

## Converting a unit



- 1 From the home screen select , then scroll to **Tools** on the Utilities tab.
- 2 Select **Unit converter**.
- 3 Choose whether you want to convert **Currency, Area, Length, Weight, Temperature, Volume** or **Velocity**.
- 4 Then select the unit and enter the value you would like to convert from.
- 5 The corresponding values then will appear on the screen.

## Using the stopwatch

- 1 From the home screen, select .
- 2 Select **Stopwatch**.
- 3 Touch **Start** to begin timing.

- 4 Touch **Lap** if you want to record a lap time.
- 5 Touch **Stop** to end the timer.
- 6 Touch **Reset** to start the time again.

## Adding a city to your world clock


- 1 From the home screen, select  and scroll to **World clock** in the Utilities tab.
- 2 Touch **Add city**. Choose continent and select the city from the **Map**. Or touch  and touch **List**. Start typing the name of the city you require, and it will be displayed on the screen.
- 3 Touch the city to select it. This will add it to your World time list.

# PC Suite

You can synchronise your PC with your phone. This will ensure all your important details and dates match, and also act as a back up to help your mind at ease.

**TIP!** To do this, you will need to install the PC Suite application provided on the CD-ROM or available as a download from <http://update.lgmobile.com>. (From [www.lgmobile.com](#) PRODUCTS > Manual & Software > Go to Manual & S/W Download Section)

## Installing the LG PC Suite on your computer

- 1 From the home screen touch , then scroll to **Connectivity** on the Settings tab.
- 2 Touch **USB connection mode**.
- 3 Connect handset and PC via USB cable and wait for a while.
- 4 Installation guide message will be displayed.

**Caution!** If installation guide message is not displayed in your PC, please check your CD-ROM setting on Windows.

- 5 Insert the supplied CD or click download button to directly download LG PC Suite program from website.
- 6 Click on the LG PC Suite Installer which will appear on your screen.

## Connecting your phone and PC

- 1 Select PC Suite mode in Connectivity menu and then connect the USB cable to your phone and your PC.
- 2 LG PC Suite will be automatically activated on your PC.

**Caution!** If LG PC Suite is not activated automatically in your PC, please check your CD-ROM setting on PC.

- 3 Your phone and PC are now connected.

## Backing up and restoring your phone's information

- 1 Connect your phone to your PC as outlined above.
- 2 Click on the **Backup** icon, and select **Backup** or **Restore**.
- 3 Choose whether to back up **Contents Data** and/or **Phonebook/Schedule/ToDo/Memo Data**. Select the location you want to back up the information to, or restore it from. Click **OK**.
- 4 Your information will be backed up.

## Viewing phone files on your PC

- 1 Connect your phone to your PC as outlined above.
- 2 Click on the **Manage Files** icon.

- 3 All the documents, flash contents, images, audio files and videos you have saved on your phone will be displayed on the screen in the LG Phone folder.

**TIP!** Viewing the contents of your phone on your PC helps you to arrange files, organise documents and remove content you no longer need.

## Synchronising your contacts

- 1 Connect the phone to your PC.
- 2 Click on the **Contacts** icon.
- 3 Your PC will now import and display all the contacts saved on your SIM card and handset.
- 4 Click on **File** and select **Save**. You can now select where you want to save your contacts to.

**NOTE:** To back up contacts saved to your SIM card, click on the SIM card folder on the left side of the PC screen. Right click on one of

# PC Suite

your contacts and choose **Select all**, then **Copy** or **Move to phone memory**.

Right-click your contacts and select **Copy to contact**. Now click on the **Handset** folder on the left side of the screen and all your numbers will be displayed.

## Synchronising your messages

- 1 Connect the phone to your PC.
- 2 Click on the Messages icon.
- 3 All your PC and phone messages will be displayed in folders on the screen.
- 4 Use the tool bar at the top of your screen to edit and rearrange messages.

## Music Sync

This menu allows to add music to GD900. Before you start to transfer music from your PC to your device, make sure your computer has the following set-up and accessory is

at hand:

- Microsoft Windows XP or Vista
- Windows Media Player 10 or above
- USB cable


**NOTE:** If your phone is not recognised, or is recognised as an image device by Windows OS.

1. Click Start > Control Panel on your desktop.
2. Select an image scanner device.
3. An image device named "GD900 Music Sync Player" will be displayed in the device list. Connect the mobile phone to your PC using the USB cable (if it is not connected).
4. To remove the device, right-click it to select Remove in the context menu.
5. Disconnect the USB cable from the mobile phone.



6. Install Windows Media Player version 11(WMP 11).
7. When WMP is successfully installed, connect the mobile phone to your PC.

## Transferring music using Windows Media Player

- 1 From the home screen select , then scroll to **Connectivity** on the Settings tab.
- 2 Select **USB connection mode** and choose **Music sync**.
- 3 Connect your handset and PC using a compatible USB cable.
- 4 When you try to connect the handset to your PC, your handset will read: Music Sync... followed by **Connected**.
- 5 The PC will prompt you to launch your preferred music management software.
- 6 Select Windows Media Player.

- 7 Go to the Sync Tab, then drag and drop the music you wish to transfer to your handset into the **Sync List** pane.
- 8 Click on **Start Sync** button. This starts the transfer process.

### **WARNING**

Do not disconnect your phone during the transfer.

**NOTE:** Music Sync is only available for music contents.

## Using iSync

Install the iSync plug-in install file which is supported by Macintosh and connect the phone via Bluetooth or USB.

To synchronise via Bluetooth, set up a pairing between the Macintosh or PC and the phone. If you want to set up via USB, select the iSync menu in USB connection mode.

# PC Suite

**NOTE:** When using Bluetooth, you have to select **iSync on** in option menu.

**TIP!** To install the iSync menu in Macintosh PC, please visit the website [www.lgmobile.com](http://www.lgmobile.com) and download the plug-in for iSync.

## DivX Converter

Install the DivX converter, which is supplied on the same CD as the PC Sync software. DivX will convert media files on your PC to a format that lets you upload them and view them on your phone.

Once installed select **DivX** from the Program Files on your PC, then **DivX converter** followed by Converter.

Use the arrows in the application to change the conversion format to Mobile. If you right click on the application box and select **Preferences**, you can change the location where the converted files are saved.

Drag and drop the files into the application for initial analysis. Then select **Convert** for the process to begin. When the process is complete, a Conversion complete pop up will be displayed.

**ABOUT DIVX VIDEO:** DivX® is a digital video format created by DivX, Inc. This is an official DivX Certified device that plays DivX video. Visit [www.divx.com](http://www.divx.com) for more information and software tools to convert your files into DivX video.


**ABOUT DIVX VIDEO-ON-DEMAND:** This DivX Certified® device must be registered in order to play DivX Video-on-Demand (VOD) content. To generate the registration code, locate the DivX VOD section in the device setup menu. Go to [vod.divx.com](http://vod.divx.com) with this code to complete the registration process and learn more about DivX VOD.

# The web

## Browser

**Browser** gives you a fast, full-colour world of games, music, news, sport, entertainment and loads more, straight to your mobile phone. Wherever you are and whatever you're into.

## Accessing the web

- 1 From the home screen select  then scroll to **Browser** on the Communication tab.
- 2 To go straight to the browser home page, select **Home**. Alternatively, select **Enter address** and type in the URL.

**NOTE:** You will incur extra cost by connecting to these services and downloading content. Check data charges with your network provider.

## Adding and accessing bookmarks

For easy and fast access to your favourite websites, you can add bookmarks and save web pages.

- 1 From the home screen select  then scroll to **Browser** on the Communication tab.
- 2 Select **Bookmarks**. A list of your Bookmarks will appear on the screen.
- 3 To add a new bookmark, select  and touch **New bookmark**. Enter a name for the bookmark followed by its URL.
- 4 Touch . Your Bookmark will now appear in the bookmark list.
- 5 To access the bookmark simply touch the bookmark then touch connect. You will be connected to the bookmark.


# The web

## Using the RSS reader


RSS (Really Simple Syndication) is a family of web feed formats used to publish frequently updated content, such as blog entries, news headlines or podcasts. An RSS document, called a feed, web feed or channel, contains either a summary of content from an associated website or its full text. RSS makes it possible for people to keep up-to-date with their favourite web sites in an automated way that is easier than checking manually.

The user subscribes to a feed by entering its link into the reader or by clicking an RSS icon in a browser that starts the subscription process. The reader checks the user's subscribed feeds regularly for new content and downloads any updates that it finds.


## Accessing a saved page

- 1 From the home screen select  then scroll to **Browser** on the Communication tab.
- 2 Select **Saved pages**.
- 3 Select the page you want to view and it will open.

## Viewing your browser history

- 1 From the home screen select  then scroll to **Browser** on the Communication tab. Select **History**.
- 2 The web pages you have accessed recently will be displayed. To access any of these pages, simply select it.

## Changing web browser settings

- 1 From the home screen select  then scroll to **Connectivity** on the Settings tab.
- 2 Select **Browser settings**.
- 3 You can edit the **Profiles, Appearance settings, Cache/ Cookies, Security** or **Reset settings**.
- 4 You can simply set these on or off by touching the switch icon.

## Using your phone as a modem

Your GD900 can be used as a modem for your PC, giving you email and internet access even when you don't have any wired connection. You can do this via the USB cable or by Bluetooth.

## Using the USB cable:

- 1 Ensure you have the LG PC Suite installed on your PC.
- 2 Connect your GD900 and your PC using the USB cable and launch the LG PC Suite software.
- 3 Click **Communication** on your PC. Then click **Settings** and select **Modem**.
- 4 Choose **LG Mobile USB Modem** and select **OK**. It will now appear on the screen.
- 5 Click Connect and your PC will connect via your GD900.

**NOTE:** For more information on synchronising using the LG PC Suite see page 84.

# The web

## Using Bluetooth:

- 1 Ensure Bluetooth is switched **On** and **Visible** for both your PC and GD900.
- 2 Pair your PC and GD900 so that a passcode is required to connect them.
- 3 Use the **Connection wizard** on your LG PC Suite to create an active Bluetooth connection.
- 4 Click **Communication** on your PC. Then click **Setting**.
- 5 Click **Modem**.
- 6 Choose **Standard Modem over Bluetooth link** and click **OK**. It will now appear on the screen.
- 7 Click **Connect** and your PC will connect via your GD900.

**NOTE:** For more information on Bluetooth see page 98.

## Access to Google Maps


You can use Google navigation services from the Communication tab. Select the Google Maps menu in Google to launch the application. Note that additional cost may occur when using this service.

# Settings

This folder lets you adapt your settings to personalise your GD900.

**NOTE:** For information on call settings see page 34.

## Changing your screen settings

- 1 From the home screen, select  then scroll to **Screen settings** on the Settings tab.
- 2 You can choose the option menu from:

**Wallpaper** - Choose an image for locking, switching the phone on or off, or making or receiving a call.

**NOTE:** The setting will be reset if you select **Reset** menu.

**Homescreens** - Shortcut/Widget/Contact/Multimedia.

**Lock screen** - Choose the clock type on the lock screen.

**Menu style** - Choose Style.

**Font** - Adjust the font size and style.

**Backlight** - Choose how long the backlight stays on.

**NOTE:** The longer the backlight stays on, the more battery power it uses and you may need to recharge your phone more often.


**Auto brightness** - Adjust the screen brightness automatically.

**Brightness** - Adjust the screen brightness.

## Personalising your profiles

You can quickly change your profile on the home screen. Just touch the status summary icon on the top, then touch the profile tab.

Using the settings menu, you can personalise each profile setting.


- 1 From the home screen select  then scroll to **Profiles** on the Settings tab.

# Settings

- 2 Choose the profile you want to edit: **Normal**, **Silent**, **Outdoor** or **Flight mode**.
- 3 You can then change all sounds and alert options available in the list, including your **Voice/Video ringtone**, **Volume**, **Message alerts** and others.

## Changing your phone settings

Use the freedom of adapting the GD900 to your own preferences.

- 1 From the home screen, select  then scroll to **Phone settings** on the Settings tab.
- 2 Select a menu from the list below:
  - Date & Time** - Adjust your date and time settings or choose to auto update the time when travelling or for daylight saving.
  - Power save** - Choose to switch the value power saving settings to **On** or **OFF**.

**Languages** - Change the language on your GD900's display.

**Auto lock** - Lock the keypad automatically on the home screen.

**Security** - Adjust your security settings, including PIN codes and handset lock.

**Touch settings** - Change the touchpad value settings.

**Memory info** - See **Using memory manager** on page 96 for more information.

**Reset settings** - Restores all settings to their factory defaults.


**Handset information** - View GD900 technical information.

**Anti-theft Mobile tracker (ATMT)** - Touch Phone settings then Security and ATMT. When the handset is stolen, handset sends the SMS to the numbers confi gured by real owner. User has to confi gure the ATMT



settings with Owner Name, Alternate no (1), Alternate no (2), Alternate no (3). Default ATMT code is "000000" - ATMT SMS will contain information about the stolen phone IMEI, current location & number of the person who is using that handset.

## Changing your touch settings

From the home screen select  then scroll to **Phone settings** on Settings tab. Choose **Touch settings**.

**Touch vibration** - Change the type of vibration.

**Vibration** - Vibration 1/2/3

**Vibration volume** - Controls the strength of vibration.


**Touch sound** - Change the tone when touching the screen.

**Sound** - Sound 1/2/3

**Volume** - Controls the volume of tone.

## Changing your connectivity settings

Your connectivity settings have already been set up by your network operator, so you can use your new phone immediately. To Use this menu to change your settings.

From the home screen select  then scroll to **Connectivity** on Settings tab.

**Network selection** - Your GD900 will connect automatically to your preferred network.

**Internet profile** - Set the profiles for connecting to the internet.

**Access points** - Your network operator has already saved this information. You can add new access points using this menu.

**USB connection mode** - Synchronise your GD900 using the LG PC Suite software to copy files from your phone. See page

# Settings

84 for more information on synchronisation.

**Projector/TV out** - Choose **PAL** or **NTSC** when connecting your GD900 to a TV.

**DivX VOD registration** - This menu is used to generate a DivX VOD registration code. Please visit <http://vod.divx.com> to register and for technical support.

**Packet data conn.** - Set the packet data connection.


**Browser setting** - Set the values related to the browser.

**Streaming settings** - Your network operator has already saved this information. You can edit it if you want to make changes.

**Java settings** - Allows you to set profiles for connections made by Java programs and to view certificates.

## Using memory manager

Your GD900 has three available memories: the phone itself, the SIM Card and an external memory card (which you may need to purchase separately). You can use memory manager to determine how each memory is used and see how much space is available.

From the home screen select  then scroll to **Phone settings** on the Settings tab. Select **Memory Manager**.

### Handset common memory 1/2

- View the memory available on your GD900 for MMS, Email, Java applications and others.

### Handset multimedia memory -

View the memory for multimedia contents, such as streaming files, movies, music, pictures, sounds, video and flash.


## Handset reserved memory

- View the memory available on your handset for SMS, Contacts, Calendar, To do list, Memos, Alarms, Call history, Bookmarks and Miscellaneous items.

**USIM memory** - View the memory available on your SIM Card.

**External memory** - View the memory available on your external memory card (which you may need to purchase separately).

## Using flight mode


Turn flight mode on by selecting  then **Settings**. Touch **Profiles** and select **Flight mode**.

Flight mode prevents you making calls, connecting to the Internet, sending messages or using Bluetooth.

## Sending and receiving files using Bluetooth

Bluetooth is a great way to send and receive files as it uses no wires and connection is quick and easy. You can also connect to a Bluetooth headset to make and receive calls.

### To send a file:

- 1 Open the file you want to send, which will be typically a photo, video or music file.
- 2 Touch  and choose **Send**. Select **Bluetooth**.
- 3 If you have already paired the Bluetooth device, your GD900 will not automatically search for other Bluetooth devices. If not, your GD900 will search for other Bluetooth enabled devices within range.
- 4 Choose the device you want to send the file to and touch **Select**.
- 5 Your file will be sent.



# Settings

**TIP!** Check the progress bar to make sure your file has been sent.

## To receive a file:

- 1 To receive files your Bluetooth must be set to **On**. See **Changing your Bluetooth settings** below for more information.
- 2 A message will prompt you to accept the file from the sender. Touch **Yes** to receive the file.
- 3 You will see where the file has been saved and choose to **View** the file or **Use as**. Files will usually be saved to the appropriate folder in My stuff.

## Changing your Bluetooth settings

- 1 From the home screen select  then scroll to **Bluetooth** on the Settings tab.
- 2 Touch .  
Make your changes to:
  - My device information** - Enter a name for your GD900.
  - My device visibility** - Choose to be **Visible**, **Hidden** or **Visible for 1 min**.
  - Remote SIM mode on** - Activate the remote SIM mode.
  - iSync on** - Choose to activate on iSync.
  - Supported services** - See options to use Bluetooth in a ssociation with different services.
  - Delete** - Choose to delete the selected profile.
  - Delete all** - Choose to delete all profiles.

## Pairing with another Bluetooth device

By pairing your GD900 with another device, you can set up a passcode-protected connection. This makes pairing more secure.

- 1 Check that your Bluetooth is **On**. You can change your visibility using the **Settings** menu.
- 2 Touch **Search**.
- 3 Your GD900 will search for Bluetooth devices. When the search is completed **Refresh** will appear on the screen.
- 4 Choose the device you want to pair with and enter a passcode, then touch **OK**.
- 5 Your phone will then connect to the other device, on which you will need to enter the same passcode.
- 6 Your passcode-protected Bluetooth connection is now ready.

## Using a Bluetooth headset

- 1 Check that your Bluetooth is **On**.
- 2 Follow the instructions that came with your headset to put it in pairing mode and pair your devices.
- 3 The headset will be automatically switched to Headset profile.
- 4 Touch **Ask before connection** or **Always connect**.

**TIP!** See page 34 for details on **BT answer mode** so that you can control how you answer calls when your Bluetooth headset is connected.

# Wi-Fi

Wireless Manager allows you to manage Internet connections per Wi-Fi (Wireless LAN) on your device. It allows the phone to connect to local wireless networks, or access the Internet wirelessly. Wi-Fi is faster and has a greater range than Bluetooth wireless technology and can be used for fast emailing and Internet browsing.

**NOTE:** The GD900 supports WEP, WPA-PSK/2 encryption, and not EAP, WPS encryption. If your Wi-Fi service provider or network administrator sets encryption for network security, fill in the key in the pop-up window. If encryption is not set, this pop-up window will not be shown. You can obtain the key from your Wi-Fi service provider or network administrator.

## 1. How to set up Wi-Fi

- 1 Touch Wi-Fi from the Settings tab and turn Wi-Fi on
- 2 AP (Access Point) Search
  - Searches which AP it can connect to.
- 3 AP Connect
  - Connects to the desired AP from the AP search list.
  - If the AP is security type WEP or WPA-PSK/2, enter the security key.

## 2. Wi-Fi network profile support

- 1 Wi-Fi profile support (how to connect to a frequently-used AP or Hidden AP)
  - 1) If the AP does not appear in the search list, you can connect to it by saving it as a profile.

- 2) Saving the frequently-used AP as a profile makes it easier to enter the Security key when connecting to an AP with that Security type.
  - 3) If the AP does not support DHCP, you can connect to the AP using a static IP address.
  - 2 Description of each field in the Wi-Fi profile.
    - 1) Network name: SSID (ID)
    - 2) Security type: WEP, WPA-PSK/2 support.
    - 3) Security key: saves the security key.
    - 4) IP/DNS setting: this allows you to set to Automatic or Static depending on whether the AP supports DHCP.  
For Static, enter the field value of the IP address and DNS server to use with the static IP address when connecting.
- 3 How to save the Wi-Fi profile
    - 1) Select Saved networks from the Options menu, then select **New network** and enter values into each field.
    - 2) It is possible to select and save the AP search list by selecting **Wi-Fi On** and then **Refresh** (Searching AP).
    - 3) After connecting to an AP with this Security type, the profile will be saved automatically.

### 3. How to obtain MAC-address

For setting up a connection in some wireless networks with MAC filter you may need to enter the MAC address of your GD900 into the router.

- 1 Touch Wi-Fi from the settings tab, then open the options menu.
- 2 Select My MAC Address and it will be displayed.

# Software Update

## Software Update

### **LG Mobile Phone Software Update Program**

For more information on installing and using this program, please visit <http://update.lgmobile.com>.

This feature allows you to update your software to the latest version quickly and conveniently over the Internet without needing to visit our service centre.

As the mobile phone software update program requires your full attention throughout the update process, please make sure you check all instructions and notes that appear at each step before moving on to the next step.

Please note that removing the USB data communication cable or batteries during the update may seriously damage your mobile phone. As the manufacturer takes no responsibility for loss of data

during the update process, you are advised to back up any important information in advance for safekeeping.



# Accessories

There are a variety of accessories available for your mobile phone, which may be sold separately. You can select these options according to your personal communication requirements. Consult your local dealer for availability. **(Items described below may be optional.)**

## Charger



## Battery



## Stereo headset



## Data cable and CD

Connect and synchronise your GD900 and PC.



## User Guide

Learn more about your GD900.



## NOTE:

- Always use genuine LG accessories.
- Failure to do this may invalidate your warranty.
- Accessories may vary in different regions.

## Network service

The wireless phone described in this guide is approved for use on E-GSM 900, DCS 1800, GSM 850, PCS 1900 and W-CDMA networks.

A number of features included in this guide are called Network Services. These are special services that you arrange through your wireless service provider. Before you can take advantage of any of these Network Services, you must subscribe to them through your service provider and obtain instructions for their use from your service provider.

### DivX VOD registration

Generate a DivX VOD registration code.

Please visit <http://vod.divx.com/> for registration and technical support.

## Technical data

### General

Product name: GD900

System: E-GSM 900 / DCS 1800 / GSM 850 / PCS 1900/ WCDMA

### Ambient Temperatures

Max: +55°C (discharging),  
+45°C (charging)

Min: -10°C

# Declaration of Conformity



## Suppliers Details

Name

LG Electronics Inc

Address

LG Twin Tower 20, Yeouido-dong, Yeongdeungpo-gu, Seoul, Korea 150-721

## Product Details

Product Name

E-GSM 900 / DCS 1800 / GSM 850 / PCS 1900 Quad Band and WCDMA Terminal Equipment

Model Name

GD900

Trade Name

LG



## Applicable Standards Details

R&TTE Directive 1999/5/EC

EN 301 489-1 V1.6.1 / EN 301 489-7 V1.3.1 / EN 301 489-17 V1.2.1 / EN 301 489-24 V1.3.1  
EN 60950-1: 2001  
EN 50360 / EN62209-1: 2006  
EN 301 511 V9.0.2 / EN 301 908-1 V3.2.1 / EN 301 908-2 V3.2.1  
EN 300 328 V1.7.1

## Supplementary Information

The conformity to above standards is verified by the following Notified Body(BABT)

BABT, Balfour House, Churchfield Road, Walton-on-Thames, Surrey, KT12 2TD, United Kingdom  
Notified Body Identification Number : 0168

## Declaration

I hereby declare under our sole responsibility that the product mentioned above to which this declaration relates complies with the above mentioned standards and Directives

European Standard Center  
LG Electronics Logistics and Services B.V.  
Veluwezoom 15, 1327 AE Almere, The Netherlands  
Tel : +31 - 36- 547 - 8940, Fax : +31 - 36 - 547 - 8794  
e-mail : jacob @ lge.com

Name

Issued Date

Seung Hyoun, Ji / Director

20, May, 2009

Signature of representative

# Guidelines for safe and efficient use

Please read these simple guidelines. Not following these guidelines may be dangerous or illegal.

## Exposure to radio frequency energy

Radio wave exposure and Specific Absorption Rate (SAR) information  
This mobile phone model GD900 has been designed to comply with applicable safety requirements for exposure to radio waves. These requirements are based on scientific guidelines that include safety margins designed to assure the safety of all persons, regardless of age and health.

- While there may be differences between the SAR levels of various LG phone models, they are all designed to meet the relevant guidelines for exposure to radio waves.
- The SAR limit recommended by the International Commission on Non-Ionizing Radiation Protection (ICNIRP) is 2W/kg averaged over 10g of tissue.
- The highest SAR value for this model phone tested by DASy4 for use at the ear is 1.47 W/kg (10g) and when worn on the body is 0.802 W/Kg(10g).
- SAR data information for residents in countries/regions that have adopted the SAR limit recommended by the Institute of Electrical and Electronics Engineers (IEEE), which is 1.6 W/kg averaged over 1g of tissue.

## Product care and maintenance

### **WARNING**

Only use batteries, chargers and accessories approved for use with this particular phone model. The use of any other types may invalidate any approval or warranty applying to the phone, and may be dangerous.

- Do not disassemble this unit. Take it to a qualified service technician when repair work is required.
- Keep away from electrical appliances such as TVs, radios, and personal computers.
- The unit should be kept away from heat sources such as radiators or cookers.
- Do not drop.
- Do not subject this unit to mechanical vibration or shock.
- Switch off the phone in any area where you are required by special regulations. For example, do not use your phone in hospitals as it may affect sensitive medical equipment.
- Do not handle the phone with wet hands while it is being charged. It may cause an electric shock and can seriously damage your phone.
- Do not to charge a handset near flammable material as the handset can become hot and create a fire hazard.
- Use a dry cloth to clean the exterior of the unit (do not use solvents such as benzene, thinner or alcohol).
- Do not charge the phone when it is on soft furnishings.
- The phone should be charged in a well ventilated area.

# Guidelines for safe and efficient use

- Do not subject this unit to excessive smoke or dust.
- Do not keep the phone next to credit cards or transport tickets; it can affect the information on the magnetic strips.
- Do not tap the screen with a sharp object as it may damage the phone.
- Do not expose the phone to liquid or moisture.
- Use the accessories like earphones cautiously. Do not touch the antenna unnecessarily.

## Efficient phone operation

### Electronics devices

All mobile phones may get interference, which could affect performance.

- Do not use your mobile phone near medical equipment without requesting permission. Avoid placing the phone over pacemakers, for example, in your breast pocket.
- Some hearing aids might be disturbed by mobile phones.
- Minor interference may affect TVs, radios, PCs, etc.

### Road safety

Check the laws and regulations on the use of mobile phones in the area when you drive.

- Do not use a hand-held phone while driving.
- Give full attention to driving.

- Use a hands-free kit, if available.
- Pull off the road and park before making or answering a call if driving conditions so require.
- RF energy may affect some electronic systems in your vehicle such as car stereos and safety equipment.
- When your vehicle is equipped with an air bag, do not obstruct with installed or portable wireless equipment. It can cause the air bag to fail or cause serious injury due to improper performance.
- If you are listening to music whilst out and about, please ensure that the volume is at a reasonable level so that you are aware of your surroundings. This is particularly imperative when near roads.

## **Avoid damage to your hearing**

Damage to your hearing can occur if you are exposed to loud sound for long periods of time. We therefore recommend that you do not turn on or off the handset close to your ear. We also recommend that music and call volumes are set to a reasonable level.

## **Glass Parts**

Some parts of your mobile device are made of glass. This glass could break if your mobile device is dropped on a hard surface or receives a substantial impact. If the glass breaks, do not touch or attempt to remove. Stop using your mobile device until the glass is replaced by an authorized service provider.

# Guidelines for safe and efficient use

## Blasting area

Do not use the phone where blasting is in progress. Observe restrictions, and follow any regulations or rules.

## Potentially explosive atmospheres

- Do not use the phone at a refueling point.
- Do not use near fuel or chemicals.
- Do not transport or store flammable gas, liquid, or explosives in the same compartment of your vehicle as your mobile phone and accessories.

## In aircraft

Wireless devices can cause interference in aircraft.

- Turn your mobile phone off or activate flight mode before boarding any aircraft.
- Do not use it on the ground without permission from the crew.

## Children

Keep the phone in a safe place out of the reach of small children. It includes small parts which may cause a choking hazard if detached.

## Emergency calls

Emergency calls may not be available under all mobile networks. Therefore, you should never depend solely on the phone for emergency calls. Check with your local service provider.

## Battery information and care

- You do not need to completely discharge the battery before recharging. Unlike other battery systems, there is no memory effect that could compromise the battery's performance.
- Use only LG batteries and chargers. LG chargers are designed to maximize the battery life.



- Do not disassemble or short-circuit the battery pack.
- Keep the metal contacts of the battery pack clean.
- Replace the battery when it no longer provides acceptable performance. The battery pack may be recharged hundreds of times until it needs replacing.
- Recharge the battery if it has not been used for a long time to maximize usability.
- Do not expose the battery charger to direct sunlight or use it in high humidity, such as in the bathroom.
- Do not leave the battery in hot or cold places, this may deteriorate the battery performance.
- There is risk of explosion if the battery is replaced by an incorrect type.
- Dispose of used batteries according to the manufacturer's instructions. Please recycle when possible. Do not dispose as household waste.
- If you need to replace the battery, take it to the nearest authorized LG Electronics service point or dealer for assistance.
- Always unplug the charger from the wall socket after the phone is fully charged to save unnecessary power consumption of the charger.
- Actual battery life will depend on network configuration, product settings, usage patterns, battery and environmental conditions.

# Trouble Shooting

This chapter lists some problems you might encounter while using your phone. Some problems require you to call your service provider, but most are easy for you to correct yourself.

<b>Message</b>	<b>Possible causes</b>	<b>Possible Solutions</b>
SIM error	There is no SIM card in the phone or it is inserted incorrectly.	Make sure the SIM card is correctly inserted.
No network connection	Signal weak Outside GSM network area	Move towards a window or into an open area. Check the service provider coverage map.
Codes do not match	To change a security code, you will need to confirm the new code by entering it again.	Contact your Service Provider.
Function cannot be set	Not supported by Service Provider, or registration required	Contact your Service Provider.
Calls not available	Dialling error New SIM card inserted Charge limit reached	New network not authorised. Check for new restrictions. Contact Service Provider or reset limit with PIN 2.
Phone cannot be switched on	On/Off key not pressed long enough Battery empty Battery contacts dirty	Press the On/Off key down for at least two seconds. Keep charger attached for a longer time. Clean the contacts.

<b>Message</b>	<b>Possible causes</b>	<b>Possible Solutions</b>
Charging error	Battery totally empty	Charge battery.
	Temperature out of range	Make sure the ambient temperature is right, wait for a while, and then charge again.
	Contact problem	Check the power supply and connection to the phone. Check the battery contacts and clean them if necessary.
	No mains voltage	Plug in to a different socket or check the voltage.
	Charger defective	If the charger does not warm up, replace it.
	Wrong charger	Only use original LG accessories.
Phone loses network	Battery defective	Replace battery.
	Signal too weak	Reconnection to another service provider is automatic.
Number not permitted	The Fixed dial number function is on.	Check settings.



## WARRANTY CARD


This LG handset and charger comes with a 12-month warranty from date of purchase or 15 months from manufacturing date of corresponding IMEI No. Of the unit whichever is earlier, against defect in material or workmanship. In case of a defect, LG Electronics India Pvt. Ltd. undertakes to get the set repaired free of charge through its authorised service centre (ASC) or service dealer subject to following conditions:

### Terms and Conditions

1. This warranty is applicable to the first purchase and in no case it can be transferred or extended.
2. Repair of this product will be carried out on a carry in basis to the nearest ASC.
3. While the company will make every effort to carry out repairs at the earliest, it however is made explicitly clear that the company is under no obligation to do so in a specified period of time.
4. The company or its authorised ASC/ service dealer reserves the right to retain any parts of the component/s replaced at its discretion. In the event of a defect being noticed in the equipment during the warranty period.
5. This warranty entitles the purchaser to free of cost repairs of the unit within warranty period and does not entitle for replacement or refund of entire unit. Claims, if any, to this warranty shall in no case exceed the purchase price of the unit.
6. In case of any software upgradation of the phone, no warranty is provided on phone memory or phone book.
7. The warranty is void in case the serial no./ IMEI no. is tampered / disfigured or details in the warranty card are not properly filled up at the time of purchase.
8. This warranty is not valid for damages resulting due to negligence, mishandling, improper use, tampering, breakage, soaking, fire, unauthorised repair and failure due to network upgrades.
9. Batteries are covered under warranty for a period of 6 months from date of purchase or 9 months from date of corresponding IMEI no. of the unit whichever is earlier
10. Warranty does not cover accessories external to the equipment supplied by the dealer.
11. The Delhi / New Delhi courts shall have the jurisdiction to try any dispute and /or suits related to or arising out of this agreement.

### Customer Information Center/ Call Center Number

For any query related to the after sales service and customer support please contact us at the numbers listed below.

	<b>SERVICE</b>
	<b>1800-180-9999*</b>
<b>**MTNL / BSNL</b>	<b>39-01-0909**</b>
<b>**Prefix STD Code</b>	

## BRANCH ADDRESSES

S. No.	Branch	Branch Office Address	STD Code	Phone No.
1	Ahmedabad	LGEIL 233-234 Platinum Plaza, Judges Bunglow Road, Bodakev Road, Ahmedabad - 51	079	4004013 / 14
2	Asansol	LGEIL Block-E Ist Floor, P C Chattarjee Market, Rambandhu Tata, GT Road (E) Asansol - 713303	0341	3202009 / 3202010
3	Aurangabad	LGEIL 302 CIDCO No 3, Opp Hotel Ramgiri, Jaina Road, Aurangabad - 431003	0240	2474055 / 32095436 / 32095437 / 32095438
4	Bangalore	LGEIL, No. 914, 2nd Floor, Sri Venkateshwara Complex, Opp. IBP Petrol Bunk, 80th Road, 6th Block, Koramangala - Bangalore - 560095	080	41145145 / 41144750 / 41144751 / 41144751 / 30910754 / 30910753
5	Bhopal	13 A Vignes Warehousing Corporation, Sector-G Govindpura Industrial Area J K Road Bhopal	0755	4062000 / 3032938 / 3959804
6	Bhubaneswar	LGEIL, Plot No.02,1st Flr. Bapuji Nagar, Bhubaneswar - 751009	0674	2531430 / 2534280 / 3966525 / 3966526
7	Chandigarh	LGEIL, SCO No. 142-143, 3rd Floor, Sector-34A Chandigarh - 160002	0172	5007389, 500 / 5089107 / 3256001 / 3256003
8	Chennai	LGEIL, AA11, 2nd Avenue, Fatima Tower, Anna Nagar West, Chennai - 600040	044	65519501 - 04
9	Cochin	LGEIL, 40/1270, Vasudeva Buildings, T.D. Road, Emakulam Cochin - 682011	0484	2369743 / 2370744 / 2370484 / 4027444 / 4027555
10	Coimbatore	LGEIL, 250a, Sangapur Main Road, Kannappa Nagar, Coimbatore - 641027	0422	2332197 / 2332195 / 2332506 / 3094813 / 3094573
11	Dehradun	LGEIL, M - 22, Mobbewala, Tata Commercial Compound, Dehradun Saharanpur Road, Dehradun	0135	2644213 / 263
12	Delhi	LGEIL, A-27, Mohan Co-operative, Industrial Estate, New Delhi	011	26991411 / 12 / 13
13	Ghaziabad	LGEIL, J-10, RDC Rainagar Ghaziabad - 201001	0120	9811354152 / 13 / 64 / 65
14	Goa	LGEIL, Plot No-D-3&D-4, Repo Baug, Alto Santacruz, Bambolim, Goa - 403	0832	3294955 / 3294956 / 3294759
15	Gurgaon	LGEIL, II rd Flr. A Block, Centre Point Bldg, Sustant Lok, P.H.I, Gurgaon - 122001	0124	4047461, 61 / 62 / 63 / 4272867 / 4047460
16	Guwahati	LGEIL, Shantiner Bhawan, C K Aggarwal Path, Cheniurthi, Guwahati - 781003	0361	2663895 / 2666958 / 2665983 / 2668984
17	Hubli	LGEIL, 603/1B, Ravi Nagar Road, Behind Renuka Petrol Pump, Gokul Road, Hubli - 580030	0836	4250251 / 52 / 2337251 / 52
18	Hyderabad	LGEIL, 1st Floor, Survey No.54, Pulla Reddy Building, Vikarampur Main Road Kharkhana, Secunderabad - 500004	040	27811732 / 33 / 34
19	Indore	LGEIL, 3rd flr., 304 Bansri Trade Centre, 581/5 M.G. Road, Indore - 452003	0731	4065523 / 24 40822157
20	Jaipur	LGEIL, B-71, Sahakar Marg, Lal Kothi Scheme, Jaipur - 302015	0141	51111 18 / 5113028 / 5105392
21	Jalandhar	LGEIL, Village Khajuria, Near Hawali Restaurant Jalandhar, Phagwara Highway, G T Road, Jalandhar	01824	502667 / 5080205 / 502668
22	Jammu	LGEIL, Plot No.-52 Yard No. 6, Transport Nagar, Nanwal, Jammu - 180006	0191	2477420 / 2477419 / 2474396 / 2474384
23	Jodhpur	LGEIL, 221-A/212-B/2, RIICO Heavy Industrial area, Jodhpur - 342003	0291	2742384 / 392
24	Kolkata	LGEIL, 1, Ho-Chi-Min-Saran, 8th Floor, Metro Towers, Kolkata - 700071	033	23826550 / 51 / 52
25	Kundi	LGEIL, Sunshine Enterprises, Sunder Cold Storage, GI Kamal Road, Kundi - Sonpat	0130	2219201 / 02 / 03
26	Lucknow	LGEIL, B-537, Hari Kuni, Keshav Nagar, Sitapur Road Lucknow - 226020	0522	2757536 / 39 / 2759121
27	Ludhiana	LGEIL, Village Jhande, Near Badawal Railway Station, Opp ferrozpur Road Ludhiana	0161	2804413 / 19
28	Mumbai	LGEIL, Trade Star, 4th Floor, A Wing, J B Nagar, Andheri Kuria Road, Andheri (E) Mumbai - 400059	022	28352882 - 2887
29	Nagpur	LGEIL, 5a, Road No.13, Behind Mest Workshop, MIDC Hinga, Nagpur - 440016	07104	235120 / 235122
30	Patna	LGEIL, 2nd Floor, Ankit Chandra Deep Complex, Bander Bagescha, Near Samrat Hotel, Patna - 800001	0612	3299158
31	Pune	LGEIL, 105/106, Premium Plot, GM Road, Opp Modern High School, Ilirri Floor, Shivaji Marg, Pune - 411005	020	66030100 / 732
32	Raipur	LGEIL, Nathani Compound, Shyam Nagar, Katara Talab, Raipur (C.G)	0771	4053171 / 4037410 / 4040745
33	Ranchi	LGEIL, 402, Commerce Tower, Opp. Gel Church Complex, Main Road, Ranchi	0651	3294262 / 2331815 / 3094262
34	Surat	LGEIL 1001-1004, Asoon Plaza, 1st Flr, Anand Mahal Road, Behind Bhulka Bhawan School, Adajan Surat - 395009	0261	2730982 / 83 / 84
35	Thane	LGEIL, Gall Shop No - 206, 2nd Floor, Sai Plaza, Above Vijay Sales Opp. Cine Wonder Mall, Ghodunder Road, Thane(West) - 406007	022	25472633 / 2637
36	Varanasi	LGEIL, Pama Complex, DLW, Lahartara Road, Shivdaspur, Manduadih, Varanasi UP - 221002	0542	2373432 / 36 / 37
37	Vijaywada	LGEIL, Door No 32-211-7, Rathnamamba Street, Prajasaki Nagar, Vijaywada - 520010, Andhra Pradesh	0866	2497283 / 87
38	Warangal	LGEIL, HOUSE NO. 1-8-58/1 FIRST FLOOR, BESIDE HDFC BANK NAKKALGUTTA, HANAMAKONDA-506001 (WARANGAL)	0870	2551453

Dealer name with Stamp ..... Dealer address .....  
 IMEI No. .... Date of sale ..... Serial no. ....

LG Electronics India Pvt. Ltd., Plot No. 51, Udyog Vihar Surajpur Kasna Road, Greater Noida, U.P.

# SERVICE CENTER LIST



**SERVICE**



1800-180-9999\*

\*MTNL / BSNL  
\*\*Prefix STD Code

39-01-0909\*\*

STATE	CITY	ASC NAME	ASC ADDRESS	CONTACT NO.	CONTACT PERSON
Andhra Pradesh	Adhoni	RS CDMA	21/490, Arts & Science College Road, Near Devi Nursing home, Adhoni-518301	9346490905	McMohan
Andhra Pradesh	Adilabad	Kiran Mobile World	7-14-78/A, Near Nethaji Chouk, Cinema Road, Adilabad-504001	9346358181	McKiran Kumar
Andhra Pradesh	Amalapuram	Sandesh Cellular	D.No-4-2-14, Opp: S.K.B.R Collage AMLAPURAM-533201	9346398838	McRavi Kumar
Andhra Pradesh	Ananthapur	RK LG CDMA	Shop No 3, Cellular, Pallavi Towers, Opp to Canara Bank, Subash Road, Ananthpur-515001	241450,	Mc Sridhar
Andhra Pradesh	Armoor	Sai Sri Electronics	Shop.no:2, mahalakshmi road, Armoor - 503224	9392622038	Mr.Srinivas
Andhra Pradesh	Bapatla	Vijaya Communications	Opp: Old Indian Gas Company, Sikaram Vari Street, G.B.C.Road, Bapatla	9346206305	Mr.B.Siva
Andhra Pradesh	Bhimavaram	Gopi Krishna Communications	JP Road Near Mohan Service Center Bhimavaram Pin-534202	9394071036	McSiva
Andhra Pradesh	Chirala	Lakshmi Infocomm	Shop No.17&18 Banam Plaza, Munthavari Center, Chirala-523155	326000	Ms.Shakeena
Andhra Pradesh	Chittoor	CMT Computer Services	18-162, High Road Opp.Bishnu Bhavan Hotel, Chittoor	222733	McGopi
Andhra Pradesh	Cuddapah	Srinivasa Communication	Shop No.4, Siddapriya Complex, Opp. HP Petrol Pumping Point, Cuddapah	9346350224	Mr.Sahadeva Reddy
Andhra Pradesh	Dharmavaram	Siddharta Communications	Opp to Sathya Lodge, NPR Circle, Dharmavaram	9347064101	McShiva Ramkrishna
Andhra Pradesh	Eluru	S.S.Computers	DoorNo:23B-4-8/3, Ayyapa Complex, Beside Kanuri Madhavi Hospital, Subbama Devi School Road, R.R.Pet, Eluru-534002.	329294	McDiwaker
Andhra Pradesh	Guduvada	Kanakadurga-communications	Opp: Alankar Family Restaurant, Eluru Road, Nehru Chowk Center Guduvada	9394220688	McKumar
Andhra Pradesh	Gudur	Srinivasa Electronics	1st floor, Airtel Building, Kummari Veedhi, Gudur - 524101, Nellore (Dt).	645644	McSuman
Andhra Pradesh	Guntur	Vasavi Associates	Door No.6-7-36, V.S.N.Complex, 8th Line, Arundelpet, Guntur-522 002.	3257789	McSatyam

STATE	CITY	ASC NAME	ASC ADDRESS	CONTACT NO.	CONTACT PERSON
Andhra Pradesh	Hazumagar/ Kodad	Sri Pavan Electronics	Mallika Towers, Besides Reliance Web World, Kodad - 508206	9346901519	Mr Narasimha Rao
Andhra Pradesh	Hindupuram	S.VA Cellular	Shop.no:3, Vinayaka Lodge, Railway Road, Hindupur - 515201	320777	Mr.D.B.Ravindra Nath
Andhra Pradesh	Huzurabad	Bhargavi Communications	Shp No E-2, DCMS Complex, Near Bus Stand, Main Road, Huzurabad-505122	9391755619	Mr.T.Vishnu Vardhan
Andhra Pradesh	Hyderabad	Bhagya Communications	Shop no:109, Upper Ground Floor, # 12-2-825, S.G.M. Mall, Mehdiptanah, Hyderabad-500028.	32972308 / 32001406	Mr.Suresh
Andhra Pradesh	Hyderabad	JVR Communication	Shop No.8, Vanija Vihar, Nalanda Building, Dilsukh Nagar Main Road, Hyderabad- 500060	66109604	MrA.Venket nariyan reddy
Andhra pradesh	Hyderabad	Primus Infomatic & Software Pvt Ltd	# 18/A, Methodist Complex, 5-9-190, Lane Opp to Chermas, Abids, Hyderabad	66755111	MrGovind Kabra
Andhra Pradesh	Hyderabad	LG Direct Service Centre	MCH No 6-3-852/3/A Ground floor, Vishva Central, Nizamia Observatory Road, Ameerpet Hyderabad	40033769 / 70	MrTarun Dandavate
Andhra Pradesh	Hyderabad	Reliable Communication	G-8, 3-6-561. AALTO'S A & M Trade Centre, HIMAYATNAGAR, HYDERABAD - 500029	9346320705	Mr.Sandeep Soni
Andhra Pradesh	Hyderabad	S V Electronics	Shop No. 41, Nilagiri Block, Aditya Enclave, Ameerpet Main Road, Hyderabad-500038	9346449323	MrPradeep
Andhra Pradesh	Hyderabad	Shweta Communications	Shop No.9, Ground Floor, Pavani Ansuuya Complex, Opp. Huda Complex, Tamaka, Hyderabad	32968162	Mr Sandeep Heda
Andhra Pradesh	Hyderabad	Shweta Computers	# 1-7-69/1 & 2, OPP Aditya Delux Hotel, Near Paradise circl, Sarojini Devi Road, Secunderabad - 500003	27721076 / 32977548	Mr.Sandeep
Andhra Pradesh	Hyderabad	Sreenivasa Technologies	SAI VIKRAM TOWERS, SHOP NO :4, RELIANCE WEB WORLD BUILDING, Balaji Nagar Kakatpally	32961479	MrPraveen
Andhra Pradesh	Hyderabad	Sri Surya Communications	#Madhu Enclave, Street no 06, Shyamliad Buildings, Begumpet, Hyderabad	32961127	MrNageswara Rao
Andhra Pradesh	Hyderabad	Sri Varun Electronics	D.No 5-8-344/1, " DHAN BHAGYA ESTATE ", Chirag Ali Lane, Abids, Next to Raghava Ratna Towers, Hyderabad - 500 001	32900909 / 55781999	MrAlok Mohan
Andhra Pradesh	Hyderabad	Sunbeam Technologies	120, Cheney Trade Centre, Parklane, Near Paradise, Secunderabad -500003	40200193 / 66383193	Mr.Suresh
Andhra Pradesh	Jagtiyal	SS Communications	Opp Kanti Bhavan Lane, Duwarka Nagar, Jagtiyal	9391533535	McHari
Andhra Pradesh	Jangaon	Sky Win Communications	#2-7-134, Beside Bharat Gas, Bus stand Road, Jangaon-506167.	9390102839	Mc Varun



STATE	CITY	ASC NAME	ASC ADDRESS	CONTACT NO.	CONTACT PERSON
Andhra Pradesh	Jangareddygudem	Sri Devi Communication	Near Gangallama Temple, Opp. Andhra Bank, Jangareddygudem	227297	Mr Prasanna Lakshmi
Andhra Pradesh	Kakinada	Delta Infotech	Door No. 6-1-29, Opp. Swami Vivekananda Park, Jawahar Street, Surya Rao Pet, Kakinada - 533001	5593533	Mr. Shivanand
Andhra Pradesh	Kamareddy	Pager King Communication	Sircilla Road, Kamareddy, Dist. Nizamabad - 503 111.	9397366633	Mr Moizuddin
Andhra Pradesh	Karimnagar	SS Marketers	2-8-40, Mukarampura, Near Circus Grounds, Karimnagar	9391552223	Mr.Cheakradhar
Andhra Pradesh	Kavali	Sree Balaji Infotech	Prasad Complex Trunk Road, Near Ongole Bus Stand, Kavali	6329567	Mr. C. Sri Sai Charan
Andhra Pradesh	Khammam	Srcven Technologies	D.No:11-2-37, Shop No.3, D.V.Krishna Complex, Beside Baburao Petrol Bunk, Balaji Nagar, Wyra Road, Khammam-507002	9396698866	Mr.Bhaskar Reddy
Andhra Pradesh	Kothagudam	S.Swathi CDMA Service Center	9-3-3, Above Sindhura Electronics, Near RTC BUS Stand, Kothagudem-507101	9391552228	MrNiaz Ahmed
Andhra Pradesh	Kuppam	Sagar Computer Services	14-204, PALACE ROAD, KUPPAM-517425	9391862436	Mr.Sagar
Andhra Pradesh	Kurnool	R K LG CDMA	Shop no:26, 27, First floor, UCON Plaza, Kurnool-518001	220201	MrG Rama Krishna
Andhra Pradesh	Machilipatnam	Om Sree Sai Communications	25/276, Kota Vari Tulla Center, Jagannadhapuram, Machilipatnam	9347741777	MrRafee
Andhra Pradesh	Madanapalle	Sri Balaji Computers	Shop No:2, 1st floor, Sri sai Complex, CTM Road, Madanapally - 517325	9390025204	MrManohar
Andhra Pradesh	Mahabubnagar	Sri Chakra Mobile Care Centre	Shop.no:15, Shareef Complex, Near Bus stand, Mahbubnagar - 509002	9396348999	MrAnil
Andhra Pradesh	Mancherla	SS CDMA Service Centre	Shop no.7, Mounika Complex, BPL Chourasta, Manchiryal-504208	9394552223	MrRajesh
Andhra Pradesh	Medak	Balaji Communications	Doonco:1-3-77/j, Opp to State bank of Hyderabad, Main Branch, Main road, Medak	9346439961	Mr.Sudhakar
Andhra Pradesh	Medchal	Khan Electronics	Sanjeeva Reddy Complex, Besides RTC Bus Depot, Medchal - 501 401	9347222088	Mr. Jaleel Khan
Andhra Pradesh	Miryalguda	Needs Electronics	Jagannath Complex, Opp Bus Stand, Miryalguda - 508207	9394645696	Mr Ravi Kumar
Andhra Pradesh	Nalgonda	Quintessence Electronics	Shop No :5, Srinivasa complex, Opp to market office, HYD road, Nalgonda - 508001	9396610220	Mr Venkateshwar Rao
Andhra Pradesh	Nandyal	Dhanush Systems	Dno:25/165 B, Sanjeev Nagar, Near Ramalayam, Nandyal	9392236699	Mr.Ramesh
Andhra Pradesh	Narasaraopet	Rajendra Infotech	D.No -90-11-10/7, Saradhamba Complex, Arundelpet.Near S.B.I ATM Narasaraopet	224136	Mr.Sasi Bhushan

STATE	CITY	ASC NAME	ASC ADDRESS	CONTACT NO.	CONTACT PERSON
Andhra Pradesh	Nellore	Balaji Watch & Electronics	16/249, Trunk Road, Nellore-524001	2339999	McRajesh
Andhra Pradesh	Nellore	Tirumalaa Electronics	Shop No. 26, 1st Floor, Co-Operative Bank Complex, Near Gandhi Statue, G.N.T. Road, Nellore	3290339	McPratap
Andhra Pradesh	Nirmal	Om Sai Electronics	Shop.no:1, Kala Nagar road, Beside 2 town Police station, Nirmal - 504106	9390000024	McMahendar
Andhra Pradesh	Nizamabad	Satya Electronics	# 7-10-65, Shop no 1, 1 st floor, H.M.H.V Complex, Beside Bus Stand, Nizamabad-503001	326000	McVenu gopal
Andhra Pradesh	Ongole	Tejasri Communications	37-1-107, Opp: Kerala Bakery, Near Mastan Darga Center, Trunk Road, Ongole	9393026115	McSasi Bhusan
Andhra Pradesh	Peddapalli (Ramagundam)	Abhi Marketers	Shop No:19/8/291, MRK Plaza, Lakshmi Nagar, Godhavari Khani - 505209	9399987773	McNagaraj
Andhra Pradesh	Peddapuram	Devi Infotech	Opp. Veterinary Hospital, Shop No. 1, Santa Market Road, Peddapuram	6593533	McSiva Kumar
Andhra Pradesh	Prodattur	SV Technologies	4-625-3, Gandhi Road, Opp Kanur Vyysya Bank, Produttur	9347251806	McRavi Kumar
Andhra Pradesh	Rajamundhary	Siri Infotech	Police Welfare Complex, City Hospitals Junction, Danvai Pet Main Road, Rajamundry	9397925799	Mr Raghvendra
Andhra Pradesh	Raychoti	Raju Computer World	Room No 3 Up Stairs Syeedia complex, bustand road, Rayachoty	9346209881	McRaju
Andhra Pradesh	Repalle	Sri Satya Solutions	D.no- 10.14.125 (UP Staires) Municipal Office Road, Railpet, Repalle-522265	9396222993	Mr.Sridhar
Andhra Pradesh	Sangareddy	Sri Technologies	Srimaan Complex, Beside Inspection Bungalow, Main Road, Sangareddy. 502001, Medak Dist	9391216573	McAjaz Ahmed
Andhra Pradesh	Sattenapalli	S.S.Communications	Opp.Telephone Exchange, Sattenapalli	9397610550	Mc.Sai
Andhra Pradesh	Shad Nagar	Sri Gana Electronics	Shop No - 2, Khajja Veeresam Complex, College Road, Shadnagar - 509216	9392633111	McVigneswar
Andhra Pradesh	Siddipet	Gopala Krishana Communications	SHOP NO:13, FIRST FLOOR, MACCA COMPLEX , OPP:CITIZEN'S CLUB, M.G ROAD, SIDDIPET - 502103. (A.P)	9392511064	Mc Nagaraj
Andhra Pradesh	Srikakulam	Venkateshwara Infotech	Raja Commercial Complex, Opp.Electrical Office, Ground Floor, Shop No.10 &11, GT Road, Srikakulam	324577	McKiran Kumar
Andhra Pradesh	Srikalahasti	KSV Computer Services	NNR Buildings, d.no:16-582, Panagal road, Srikalahasti 517644	9390044399	McSahadeva Reddy
Andhra Pradesh	Sullurpet	Sai Baba Electronics	S.V.T Street, Opp: Reliance Office, Sullurpet	9346920527	Mc. S. Venkata Krishna

STATE	CITY	ASC NAME	ASC ADDRESS	CONTACT NO.	CONTACT PERSON
Andhra Pradesh	Tadepalligudem	Sri Haripriya Infotech	Thota Gopi Complex, Police Quarters Lane, Beside Zp High School, Tadepalligudem	9346445720, 08818-210565	Mr.Suresh
Andhra Pradesh	Tanuku	Shivanand Enterprises	Door No. 34-3-3, Main Road, Gamini Compound, Tanuku	9346408640	Mr.Srinivas
Andhra Pradesh	Tenali	Vaishnavi Infotech	D.No:22/11/114, Opp. Kanikacharla Kalyanamandapam, Bose Road, Tenali.	9347651330	MrMurali
Andhra Pradesh	Tirupati	CMT Communication	13-7-796/14/3, TUDA OFFICE Road, Tirupati-517501	3296979	MrK Vasu Naidu
Andhra Pradesh	Vijayawada	K L Computer House	39-9-46, Svs Temple Street, Labbipet, Vijayawada	6520461	MrKartik
Andhra Pradesh	Vijayawada	V V Communications	28-23-31/32, Opp.Swarugha Foods, Vijay Talkies Center, Vijayawada	320866-320988	MrRahul
Andhra Pradesh	Vishakapatnam	Jai Bharani Communications	Door No:52-11-7/7, Sapthagiri Plaza, Old Resuvanipallem, Vishakapatnam-13	6634666	MrPVenkatapathi Raju
Andhra Pradesh	Vishakapatnam	Sri Sai Ganesh Infotech	G5, Ground Floor, Backside of Sangam-Sarat Theatre, 1st Lane, Dwarka Nagar, Vishakapatnam - 530 016.	3258777	Mr.Chandra Shekar
Andhra Pradesh	Vizayanagaram	S R Technologies	D.No:1-9-1/44, Opp: Z P Office, Railway Station Raod, Vizayanagaram.	9346418791	MrBalakrishna
Andhra Pradesh	Vuyyuru	Sugreeva Communications	Behind Datta Automobiles, Katturu Road, Vuyyuru	9393033555	MrPhani
Andhra Pradesh	Wanaparthy	Sri Ganesh Electronics	Shop No : 16-63, Opp R R Complex, Wanaparthy - 509103, Dist Mahabubnagar	9396800275	Mr Deva Raj
Andhra Pradesh	Warangal	S S Marketers	6-1-75/1, Sai Bhavan, Sridevi Theatre Road, Hanamkonda, Warrangal-506001	2552223	MrL. Srinivas Rao
Andhra Pradesh	Zaheerabad	Renuka Technologies	Shop no:123/1, First Floor, Alipur, Zaheerabad.Pin-502220	316143	MrAbhiram Joshi
ASSAM	Gwahati	PRAGATI SERVICES	2nd Floor, Kiranhangsha Commercial Complex, Dr J.C. Das Road, Harisabha, Panbazar, Guwahati, Assam	2733501	Mr Pradeep Khaitan
Assam	Silchar	IT ONLINE	N.S.Avenue, Rangirkhari, Silchar, Cachar, Assam	221260	Mr.Sharma
Bihar	Arrah	Surya Services	Sushila Bhawan, Suryapuri colony, By pass road, Arrah	9334538845	Mr.Sanjay Kumar
Bihar	Begusarai	Krishna Communication	Eashwari Complex, Dak Bangla Chowk, Bishrupur, Begusarai, Bihar-851101.	9334341700	Mr.Dinkar Kumar
Bihar	Bhagalpur	Printronic Infosolutions	Ganpati Complex, 1st floor, Patel babu road	9934605864	MrHimansu Shekhar
Bihar	Bhagalpur	S.K.Communication	NEAR RAILWAY STATION, Super Market Complex, Patel Babu Road, BHAGALPUR-812002	9334255275	MrKundan Kumar
Bihar	Biharsharif	Shanya Infotech	Magdha Commercial Complex, 1st.Floor, Shop.No.5, MG Road, Bharaopar; Bihar Sharif, Nalanda Dist. Bihar.	9334048037	MrAmit Kanchan

STATE	CITY	ASC NAME	ASC ADDRESS	CONTACT NO.	CONTACT PERSON
Bihar	Chapra	Ambey Associates	D-23, Hathwa Market, Chapra, Dist: Saran-841413 Bihar.	9334295605	McJayant Kumar
Bihar	Darbanga	Prime Computer	Hanuman Nagar, Doner Road, Darbanga.	9334934065	McAbhinav Kumar Verma
Bihar	Gaya	Louts Enterprises	Opp.Aviva Life Insurance, Kanya High School Road, Ramna, Gaya.	9334492033	McPankaj Ranjan
Bihar	Muzafarpur	Krish Enterprises	NrKanhoulinaka.no.2, Kachisarai Road, Muzafarpur.	9304410745	McSanjeev Kumar
Bihar	Patna	Competent Mobile Service	Shop 1, Hotel Lalitha Complex, East Bowring Canal Road, Patna	9334027706	McMohit Ahluwalia
Bihar	Patna	Infotek Trading Company	1st floor, City Palace, New Dak Bunglow Road, Patna-800001	9334116145	McSanjay Choubey
Bihar	Patna	Micro Zone-Patna	A.H Complex, # G26, Near Kotak Mahindra Bank, Exhibition Road, Patna	3294696	McMithlesh Kumar
Bihar	Patna	Synerzy Trading Company	G-01, Chanakya Plaza Complex, Main Road, Kankarabagh, Patna.8000020	2356900	McVikas Chandra
Bihar	Purnea	Micro Zone-Purnea	Narottam Hata, Opp.Dr:PCJHA, NH-31, Purnea-854326	9304166633	McAmit Kumar
Bihar	Sasaram	Nandika Enterprises	Hari Complex, Panjab National Bank, Sasaram, Rohtas-821115 (Bihar)	4222008	McAbhinav Gupta
Chattisgarh	Ambikapur	Neha Communication	Ramanuj Ganj road, Opp. Kosa Form, Ambikapur, Sarguja, Pin-497001	240427	McRishi Dubey
Chattisgarh	Bhilai	A B Automation	Shop no. 242, 1st floor Chouhan Plaza, GE Road, Supela Bhilai, Chhatisgarh- 490023	2295989	Mc Satish Singh
Chattisgarh	Bhilai	Sai Ram Electronics	SHOP-NO-52/90, HIMALAY COMPLEX, AKASH GANGA, SUPELA, BHILAI	4038917	Mc Balan
Chattisgarh	Bilaspur	Mahamaya Infotech	Shop No 203, Jain Plaza, Ground floor, Link Road, Bilaspur	2413865	Mc Pawan Kumar
Chattisgarh	Korba	Star Mobile Services	SS PLAZA, FD-15 POWERHOUSE ROAD, KORBA-495678	9300401485	Mc Anish Menon
Chattisgarh	Raigarh	Blue Chip Computer	Purana Sadar Bazaar, Raigarh, Chhatisgarh.	9977217776	Mc Ashok Agrawal
Chattisgarh	Raipur	Cybernet Systems	B-2, 1st floor, Garchaz Complex, Jail Road, Raipur - 492001	406771	Mr Anand Singh
Chattisgarh	Rajnandgaon	Bhavye Services	SHOP NO 5, BELOW SBI, STATE BANK OF INDIA, KAMPTTEE LINE, RAJNANDGAON.	324200	Mc Manish Golcha
Delhi	New Delhi	Aegiss Infotech	UG-25, Ansal Chamber -2, 6, Bhikaji Cama Place, New Delhi-110066	65477740	Mc Atul Gupta
Delhi	New Delhi	Arham Infotech Services	4737/A 23, Ansari Road, Daryaganj, Delhi-110002	41501124	Mc Anil Surana

STATE	CITY	ASC NAME	ASC ADDRESS	CONTACT NO.	CONTACT PERSON
Delhi	New Delhi	Comhard Systems	D-30, 31, First floor, Near Hotel Shipra, Main Vikas Marg, Lakshmi Nagar	32955887	Mr Ravi Kant Cupta
Delhi	New Delhi	Comhard Systems	B-120, Hardev Puri, 100 Feet Main Road, Near MTNL Office, Nathu Colony Chowk, Shahdra, New Delhi - 110 093.	32575507	Mr Ravi Kant Cupta
Delhi	New Delhi	Connexions And Communications	183, Avtar Enclave, Opposite Nirula's, Pashchim vihar, New Delhi-110063	32451431	Mr Bhupinder Agrawal
Delhi	New Delhi	Cube Engineers And Consultants Pvt Ltd	A-65, Naraina Industrial Area, Phase-1, New Delhi	65450272 / 41411620	Mr. Arvinder
Delhi	New Delhi	Elcom Trading Company Pvt. Ltd.	G-1, Goverdhan Building, 53-54 . Nehru Place, New Delhi -110019.	64582709	Mr. Somesh Narang
Delhi	New Delhi	Innovative Telecom	304, GDITL Northex Towers, A-09, 3rd Floor, Northex Tower, Netaji Subhash Place, Pitampura, New Delhi-110 088.	32925753 / 65154340	Mr Manoj Garg
Delhi	New Delhi	Nice Telecom	15/19 & 15/21, DDA Complex, Nangal raya, Near D Block, Janakpuri, Delhi - 110046	9350863630	Mr. Ripul Garg
Delhi	New Delhi	Sukriti Communication	101 Patparganj- Mayur Vihar phase -1 - New Delhi -110091	32498011	Mr.Dipendra kumar chaturvedi
Delhi	New Delhi	Teletalk	C-21, First Floor, Near Bus Stand, Bhajan pura, Delhi-11053	9818400551	Mr.B.C.Vashist
Delhi	New Delhi	Touch Tone Telecom	B-52, First Floor, Kalkaji, New Delhi	32939031	Mr. Ashish Dey
Delhi	New Delhi	Ucom Technologies Pvt Ltd.	45, 1st Flr, Corner Mrkt, Malviya Nagar, New Delhi - 110017	41745469	Mr. Neeraj
Goa	Margoa	SKY LARK	SHOP NO 05.CARVALHO APPTS, NEAR RAILWAY CROSSING, COMBA,	2736100	MrCHRIS
Goa	Panjim	Mandovi Mobiles	Mohidin Towers Do. No. AS3 Opp to Hotel Manashanti Dadavaiya rd Panjim-403001	6452949	Mr. Prakash
Gujarat	Ahmedabad	A Com Technologies	Shop No-37, 1st Floor, Shubh Complex, Near Rajasthan Hospital, Camp Road, Shahibaug, Ahmedabad-380004	32940560	Mr. Vijay.S.Gohel
Gujarat	Ahmedabad	Mishree Communication	FF-17, RUDRA SQUARE, OPP. JUDGES BUNGALOW, POLICE STATION, BODAKDEV, AHMEDABAD-54.	32508491	Mr. Mitesh Patel
Gujarat	Ahmedabad	Silicon Valley	9, Gokul Palace, Maninagar Cross Road, Maninagar Ahmedabad-380008	30225430	Mr. Rajesh Patel
Gujarat	Ahmedabad	Vision Communication	33, 1st Floor, Sukh Sagar Complex, Opp. Dinesh Chamber, Bapunagar, Ahmedabad -380024	65122322	Mr Ajay Kachhadia
Gujarat	Amreli	Precision Telecom	32, 33 Opera House, Station Road, Amreli	230940	Mr. Kamlesh Tank

STATE	CITY	ASC NAME	ASC ADDRESS	CONTACT NO.	CONTACT PERSON
Gujarat	Ankaleshwar	Akshar Telecom	C/1 Keval Shopping Center, old National Highway No.8, GIDC, Ankaleshwar-393001	250860	Mrs. Anita Amin
Gujarat	Bharuch	Akshar Telecom	Prmukh Swami Complex, Panch Batti, Bharuch	2241027	Mr. Harif Patel
Gujarat	Bhavnagar	Shivshruti Services	981/B, Makvana Building, Down Chowk, Bhavnagar .364001	3296222	Mr P D Jala/ Sandeep Patel
Gujarat	Bhuj	Infotech Computer	2nd Floor, NarNarayan Chambers, Opp Indian Airlines Office, Station Road, Bhuj	324295	Mr Vasant Mepani
Gujarat	Gandhidham	Vansh Electronics	Shop No. 35, Swami Vivekanand Complex, Near Oslo Circle, Gandhidham	232739	Mr Siddarth Gajjar
Gujarat	Gandhinagar	Creative Communications	Shop No 102, Suman City, Sector 11, Gandhinagar-382011	23226241	Mr K.J.Barot
Gujarat	Himmatnagar	Jay Telecommunications	B-F 105, 1st floor, Durga Complex, Near Railway Station, Himmathnagar	329532	Mr Manibhai Patel / Neeraj Patel
Gujarat	Jamnagar	Sudarshan Infosys	"Shradhda", Park Colony, Motor House, Near axis Bank, PN.Marg, Jamnagar 361008	2552696	Mr. Amit Unadkat
Gujarat	Junagarh	K.J.Traders	29/30, Danapith, Junagadh	2627320	Mr Paresh Rughani
Gujarat	Kalol	Maitree Communication	B/93, Yogi Complex, opp. Mahendra Mill Road, Kalol	325288	Mr Jignesh Shah
Gujarat	Mehsana	Prime Computer Consumables	15-B, Vimal Super Market, B K Road, S.T.Workshop Road, Mehsana-384002	2325123	Mr. Suketu Patel
Gujarat	Morvi	Pulse Sales And Services	SHOP NO 6 MADHAV MARKET FIRST FLOOR NEAR NEW S.T.STAND SANADA ROAD Morvi-383641	9428565667	Mr Natubhai Patel
Gujarat	Navsari	Deep Enterprise	10, Upper Level, Diamond Palace, Sayaji Road Sattapit, Navsari-396445	324095	Mr Vinod Kasundra
Gujarat	Palanpur	Shree Manibhadra Mobile	21-First Floor, aroma arcade, opp jilla panchayat, near kozi tower, Palanpur-385001	300001	Mr Panchal Sunil D
Gujarat	Patan	Able Infotech	9, Palika Bazar Complex, Rajmahel Road, Near Santokba Hall, Patan	9924256068	Mr. Rakesh Bhai
Gujarat	Porbandar	Varun Infotech	1ST Floor, Garden Cafe Building, Opp.New Fountain, Nr.old R.T.O Office, Porbandar - 360575	3290285	Mr. Mitesh Changela
Gujarat	Rajkot	Joshi Telecom	Shop No.8, Kuber Complex, Opp Chandubhai Bhelwala, Dr Yagnik Road, Rajkot	6530707	Mr Jiten Dave
Gujarat	Rajkot	Roopang Infocare	Vinod Nivas, 4, Sardamagar(West), Nr Astron Cinema, Rajkot-360001	2464485	Mr. Kishore Patel

STATE	CITY	ASC NAME	ASC ADDRESS	CONTACT NO.	CONTACT PERSON
Gujarat	Surat	Excel Solutions	H-3, Ruchi Flats, Near Iqara Building, Adajan Hazira Road. Surat-395009	6544500	Mc Virender Jain
Gujarat	Surat	Om Sai Services	39, Golden Point, Near Science Laboratory, Ring Road, Surat	3231233	Mc Dharmesh Patel
Gujarat	Surendranagar	Nihaal Computer Services	94 Old Housing Bord Opp Muni. Scool No.13, Surendranagar	320375	Mc Sikandar
Gujarat	Vadodara	Shreeji Telecom	5B-10, Windsor Plaza, R.C.Dutt Road, Alkapuri, Vadodara - 390002	9328093424	Mc Jignesh Gohel
Gujarat	Valasad	Klassik Stationo Products	10, Jethalal Mulji Market, Halar Road, Valsad -396001	329363	Mc Darshan Panchal
Gujarat	Vapi	Klassik Stationo Products	116, Bhanudarshan Co-Op Society, Koparli Road, Near Gunjan Cinema, GIDC, Vapi	3292363	Mc Avishek Suhasaria
Gujrat	Anand	Zainee Mobile	2nd Floor, Limbuwala Complex, Nc GPO, Opp. Kavita Shopping Centre, Anand	9375960954	Mc A. J. Raja
Haryana	Ambala	Bee Ess Aar Communication	26 First floor MC Market Behind Negar Cinema Ambala Cantt-133001	4006229	Mc Rajiv Gupta
Haryana	Bahadurgarh	Unique Telecom	Shop No.5, Rajaram Market, Main Najafgarh Road, Bahadurgarh, Near Bajaj Showroom	9315873676	Mc Harinder
Haryana	Bhiwani	Sandeep Electronics	10 th Plot, First Floor, Circular road, Mahem Gate Chowk, Near Kajal's Nursing Home, Near Vodafone Office, Bhiwani, Haryana - 127021	252000	Mc Sukhveer Saini
Haryana	Faridabad	Comsoft Computers	601/1 Copi Colony Chowk- Sector-19, Near Prem Prakash Ashram, OLD Faridabad-121002	4104252	Mc Ashwani Jindal
Haryana	Faridabad	VR Infocomm	Shop No.44, Neelam Fly Over, Neelam Chowk, NIT Faridabad.	4031959	Mc Vinod Kumar Gupta.
Haryana	Fatehabad	Sky Lark Mobile Point	4, C.T.Road, Near Bus Stand, Marla Colony, Fatehabad	989655244	Mc Pankaj
Haryana	Gurgaon	Signature Communications	B-100 A, South City -1, Opposite - Huda Gymkhana Club Near Signature Tower - Gurgaon 122001	4102709	Mc Raj Kumar Garg
Haryana	Gurgaon	Lalji Communication	SCO-31, - First Floor, Above MTNL Sanchar Haat, Main Market, Opp. BSNL Exchange, Sector-12A, OLD Gurgaon -122001.	3200900	Mc Bharat Bhusan
Haryana	Gurgaon	LG Direct Service Centre	B-36, 37 & 38, Industrial Area, Mehraul Gurgaon Road, Near Bata Chowk, Gurgaon - 122 001.	3027300	Mc Deepak
Haryana	Hissar	Parnami Communication	32, Red square Market, Near Dena Bank, Hissar, Haryana-125001	9354332000	Mc Pradeep Garg
Haryana	Jind	Gaurav Telecom	Shop No.19 Near Rani Talab, Near Bharat Electronics, Jind	325400	Mc Deepak Garg
Haryana	Kaithal	Mahesh Communication	Shop no.22, Bajrang Bali Market, Near Randhir cinema- Kaithal	9315146000	Mc Mahesh

STATE	CITY	ASC NAME	ASC ADDRESS	CONTACT NO.	CONTACT PERSON
Haryana	Karnal	Mass Communication	Shop No.68, Main Market, Ground Floor, Moughal Canal, Karnal - 132001	3290717	McDavender Yadav
Haryana	Kurukshetra	Bharti Communication	3, Krishna Market, Opp.Purohit Sweet House, Pipili Road, Kurukshetra, Haryana-	9354165077	McVijay
Haryana	Narnaul	Prime Communication	Shop no.8, 1st floor Taneja complex, near Nirula Hotel, RewariRoad Narnaul	9355375351	McNaveen
Haryana	Palwal	Shree Ganesh Communications	Basant Apts, Shop No.5, Kithwari Chowk, Mathura Road, Near Saraswathi School, Palwal	321028	McHarish Chandra
Haryana	Panipat	INS Telecom	2, Bishan Sarup Colony, Opp Bus Stand, Near Hotel Deep, Panipat	9354917110	McPankaj kumar
Haryana	Rewari	Mahak Tele Services	53-A, Model Town, Near Shreeji restaurant, Rewari	329222	McGaurave Yadve
Haryana	Rohtak	Telecentre	13, Apna Bazar, Civil Hospital Road, Near Chhotu Ram Chowk, Rohtak-124001	247242	McMadaan
Haryana	Sirsa	Sirsa Communication	168, Huda Complex, Old Bus Stand, Sirsa	329591	McRajindera
Haryana	Sonipat	Teleworld	Shop No 20, 1st Floor, M.C.Market, Subhash Chowk, Sonipat, Haryana-138001	3290889	McVipin Dua
Haryana	Yamuna Nagar	Krishna Communication	Shop No.-24/75, Thapar Colony, OPPOSITE SWANTANTAR FANCY LADIES SUITS, NEAR FOUNTAIN CHOWK, YAMMUNAGAR HARIANA- 135001	200610	Mr Harsh/Mc Pradeep
Himachal Pradesh	Dharamshala	Deepsun	Near Sharma Studio, opp Mickey tour and travel, kotwali bazar Dharamshala, 176215	9318679122	McDeepak
Himachal Pradesh	Mandi	VM.Communication	NEAR PNB MOTI BAZAAR, MANDI-175001	9318666005	McM Mahender Singh Thakur
Himachal Pradesh	Palampur	Electronic Home	Kallu Di Hatti, PO Maranda Thasil, Palampur, Distt-Kangra-176102	238463	McRavi Kumar
Himachal Pradesh	Poanta Sahib	Singal Marketing	Badri Nagar, Near LIC Office, Poanta Sahib	9318785134	McRajesh Singal
Himachal Pradesh	Shimla	Hanu Computers	76/ 9, 2nd floor Lower Bazar Shimla	2650560	McSandeep Patial
Himachal Pradesh	Solan	Vikas Mobile Repair Center	MOHAN COMPLEX, First Floor Upper Bazar-173212	9816271183	McVikas
Jammu & Kashmir	Jammu	Mobile Care	608-A Gandhi Nagar Behind Laxmi Narayan Mandir	2436814	McDixit Gupta
Jammu & Kashmir	Srinagar	The Net Surfer	2nd Floor Mohi-ud-Din Building, Poloview, srinagar	2459549	McWasim
Jammu & Kashmir	Udhampur	Service Solutions	Ward No. 15 Shakti Nagar Opp. Old ITI Udhampur	276724	McRakesh



STATE	CITY	ASC NAME	ASC ADDRESS	CONTACT NO.	CONTACT PERSON
Jharkhand	Bokaro	Digital Equipment Centre	CB-11, City Palace, Opp.Indian Bank, Bokaro.	9334072270	McDewashish Ojha
Jharkhand	Daltonganj	Maa Mobiles	Jail Road, Jail Hata, Dalton Ganj-822101	9304285663	McNavin Kr. Kashyap
Jharkhand	Deoghar	Kanan Electronics	Hotel Relax Complex, BLC Road, Deogarh-814112	9304059528	McMahesh Sharma
Jharkhand	Dhanbad	Nirmala Entreprises	Ground Floor, Muskan Complex, Nr.Subhash Chowk, Dhanbad.	9334027583	McNiraj Sinha
Jharkhand	Godda	Karan Mobilink	Maa Kalyani, Katra, Main Market, Godda, Jharkhand-814133	9334449900	Mr.Saroj Kumar Jha
Jharkhand	Hazaribagh	Digital Services	Plaza Mkt, pugmill road, NcKallu Chowk, Hazaribagh.	9334599570	Mr.Shish Alam
Jharkhand	Jamshedpur	Prasad Electronics	Nr.Bus stand, Community Center, Kagal Nagar, Jamshedpur.	2226077	McRaju/ Saritha
Jharkhand	Jamshedpur	Tinupati Teletech	Chakravarti Compound, Near Hotel Castel, Contractors area, Bistupur, Jamshedpur-831001	3293331	MrAbhijeet Mukherjee
Jharkhand	Ramgarh	Shreyas Empaire	Bus Stand Complex, Ramgarh-829122	9334085642	McPiyush
Jharkhand	Ranchi	Balaji Infotech	Near Dr.Kashyap Eyeclinic, Purulia Road, Ranchi.	3205400	McSanjeev, McSunil Kedia
Jharkhand	Ranchi	Satya Systems & Solutions	158, Opp Hotel Palace, Kadru, Ranchi-834002	3291019	McAmit Rastogi
Karnataka	Anekal	Sri Venkateshwara Communications	# 37, KSRTC COLONY, HOSUR MAIN ROAD, ANEKAL TALUK, BANGALORE - 562106	320078	McR.Jaganath
Karnataka	Bailhongal	3G Communication	Shop No 459\2 Near Inchal Cross Belgaum Road Bailhongal-591102	9343815097	McVishwanath
Karnataka	Bangalore	Ascent Communication	No:113, St Johns Church road, Bangalore - 560005	32914856	McKumaresan
Karnataka	Bangalore	CRYSTAL INFOCOM	SRILAKSHMI VENKATESHWARA COMPLEX, SHOP No. B-5, 33RD Cross, 11 th Main, 4th Block Jayanagar, Bangalore-560010	32710202	McPrasad
Karnataka	Bangalore	LG Direct Service Centre	No: 93, TKN Mansion, KH Road (Double Road), Bangalore	41145145 / 9739983435	McRaju Naik
Karnataka	Bangalore	Optima Mobile Services	24/2, Dr.Rajkumar Road, Near Subramanyanagar Police Station, 2nd Block, Rajajinagar, Bangalore - 560 010	23131953 / 65722205	McUnni Krishnan
Karnataka	Belgaum	Hello India Telecom	G-4, Maratha Mandir Complex, Khanapur Road, Near Railway Flyover, Belgaum - 590 001.	4211329 / 2420533	McMohan
Karnataka	Bellary	MAKAM ELECTRONICS	# 90 C/16 HIMALAYA BUILDING K.C.COLONY BELLARY 583101	655043	McKrishna Murthy Makam

STATE	CITY	ASC NAME	ASC ADDRESS	CONTACT NO.	CONTACT PERSON
Karnataka	Bhadravati	Digital Communication	SR Complex 4th cross B H Road Bhadravathi-577301	9341081291	McNagabushan
Karnataka	Bhatkal	Vijay Communication	Hussian Complex Bunder road Bhatkal - 581320	300027	McVittal H.Naik
Karnataka	Bidar	Mayuri Infotech	Ravi complex, shop no: 4, Udgir road, Bidar-585401	225544	McRavi Halhalli
Karnataka	Bijapur	Turning Point Computers	Khed building, opp Vijaya college, Sholapur road, Bijapur-586103	329318 / 300005	Mr.S.M.Hiremth
Karnataka	Channapatna	C&C Technology	"Ramanujam Nilaya" No.2104, 11th Cross, Kuvempunagar B M Road, Channapatna - 571501	7251716	Mr.Charan
Karnataka	Chikaballpur	Sri Ram Prasad Enterprises	1st Floor. BB Road, Beside State Bank of Mysore, Chikkballapur-562101	325567	McVardharaj
Karnataka	Chikmaglaur	Cell Tec Electronics	Ragavendra complex, NMC circle, Neharu road, Chikmaglaur - 577101	9341013183	McPrem Kumar
Karnataka	Chintamani	Amrutha Mobiles	# 5, Venkatadri Complex, M.G. Road, Opp to Adarsha Theater, Chintamani - 563125	9342262811	McSudarshan Reddy
Karnataka	Davangere	Kruthika Communication	Shop No: 6, Park View Plaza, (Income Tax Office's Ground Floor), 4th Main, Near Vishweshwaraiah Park, Pj. Extension, Davangere-577002	325444	McSujay
Karnataka	Golak	Cell World	Banshankri Complex, Basaweshwara circle, opp to court Gokak - 591307	9343441777	Mr.Shivanand / Chougala
Karnataka	Gulbarga	Aishwaraya Communication	C-9, Asian Plaza S.V.P.Chowk Main road Gulbarga-585102	329447	McMallikarjun
Karnataka	Hassan	Sree Digital Solutions	1380 Mission Hospital road opp Hindibed college - 573201	9343566658	McVidya Shankar
Karnataka	Hosakote	Exposys Communication	Shop no 1, Mahalatha Devi Complex M V Badavane, College Road, Hoskote-562114	7931229	McRaghunandan
Karnataka	Hubli	Shruti Services	A-115, (Lower Ground Floor), IT PARK, Opp. Glass House, Hubli - 580029.	3290671	McMahendar
Karnataka	Hunsur	Sriam Infocom	No.6, Municipal complex, H.D.Kote road circle - 571105	253699	McH.J.Pradeep
Karnataka	Kadur	Ashwa Tele Mobiles	Opp. Basaweshara Hospital, TB Road Kadur	9341033310	McR.Ananda Murthy
Karnataka	Kankapura	Sumukh Communications	Harshitha Complex, Budikere, Bangalore main rd, Near KSTC Bus stand Kanakapura-562117	9342743344	McR.C.Harish
Karnataka	KGF	Global Net Communications	Opp. King George Hall, Geetha road Robetson pet, KGF - 563122	329559	Mr.Shiva Kumar
Karnataka	Kolar	Seanmatrix	No:384, Suguna complex, Near KSRTC bus stand, Anthargange road, Kolar 561011	2228714	McNithyanada Shetty
Karnataka	Kumta	Krishna Mobiles	938, College road, NH 17, opp RWW, Kumta - 581343	329607	McD.V.Prabhu

STATE	CITY	ASC NAME	ASC ADDRESS	CONTACT NO.	CONTACT PERSON
Karnataka	Madikeri	C.M.Communications	Shop no. 8, First Floor, M A Complex, Kohinoor Road, Madikeri	9343837555	McMohamad Sharief
Karnataka	Mandya	C & C Technology	2068, First Cross, Subhash Nagar, Krishna Krupa Nilaya, Mandya-571401	402007	MrCharan
Karnataka	Mangalore	Innovative Infocom	15-10-537/11, Jayvarma Centre, Mallikatte Circle, Kadri, Mangalore - 575002.	6563244	MrSebastian Fernandes
Karnataka	Moodabidri	Media Guard Technologies	Rajeev Gandhi complex main road Moodabidri - 574227	325909	McVishwas Kumar
Karnataka	Mysore	K.K.Marketing	1432/9, Tribhuvan Towers, opp Vetenary Hospital, Dewan's Road, Dhanwantri Road Cross, Mysore - 570001	4258613	McKarunakaran.
Karnataka	Nipani	Manusoft Computers	Dumale Complex Chikodi road Nipani - 591237	222005 / 9448148005	Mc Pavan / Mahesh Dumale
Karnataka	Raichur	Akshay Electronics	Shop No.2 Ground Floor, Hotel UMA Complex, Station Road, Raichur - 584101	225300	McNarasimthlu
Karnataka	Ranibenuur	Kruthika Communication	OLD LIC Building, Opp Gupta Petrol Bunk, PB Road, Ranebennur-581115	321444	Mr.Sujay
Karnataka	Shimoga	Chetan Electronics	C-5, Kenchappa complex, Durgigudi main road, Shimoga-577201	401889	McPanduranga Rao
Karnataka	Tiptur	Shree Digital Solutions	Nanjappa complex, opp city union bank, BH road, Tiptur - 572201	9343813731	MrRavi
Karnataka	Tumkur	Durga Communication	No.14 CMI Complex, Near Gayatri Theater, Below Navratna Silks & Sarees, B.H.Road Tumkur - 572101	2256184	McNaveen Kumar
Karnataka	Udupi	Sanman Mobile Services	Shop No: 15, Simaz complex, Diana circle, Court road, Udupi- 576101.	3255770	McPrakash
Kerala	Alappuzha	Getronics	FIRST FLOOR, KARTHIKA BUILDING, OPP SDV BOYS HIGH SCHOOL, COURT ROAD, ALLEPPY.	3290446	McOmprakash
Kerala	Alathur	Marstek	12/950, Ground Floor, AR Complex, Opp. Munsiff's Court, Alathur, Palakkad Dt. - 678 541	321311	Mc Rajesh. V.
Kerala	Aluva	Sed Infosys	BUILDING NO 12/57 DOOR NO 8, FIRST FLOOR, POOTHULLIL BUILDING, ALLUVA - 683 101.	3235599	McSudheesh
Kerala	Attingal	AM Technologies	Mamam, Near Dreams Theate; Attingal	3290301	McSaji
Kerala	Badagara	Amarikish Communications	1st Floor, Sarala Complex, Near KVR Motors, N.H. Bypass Road, Nut Street, Vadakara-673101.	3255756	MrJeeju / Mr. Baiju
Kerala	Cherthala	Cherukattu Phones	Krishna Building, Opp govt boys high school, AC road, Chertalli	9388910703	McMahesh C D

STATE	CITY	ASC NAME	ASC ADDRESS	CONTACT NO.	CONTACT PERSON
Kerala	Ernakulam	Guidelines	CC28/902, Ground Floor, Mundukottackal Estates, S A Road, Kadavanthara, Cochin-682020	4000113	MrManoj G
Kerala	Ernakulam	Teletech Systems	20, First Floor, Penta Estate, above Airtel office, Janatha Junction, Palarivattom, Cochin-25	3207554	Mr.Sony Thomas
Kerala	Ernakulam	Zenicon Infocom(P) Limited	Above Syndicate Bank, Opp Cochin Shipyard, M.C.Road, Cochin-15	2359511	McJaimon Joseph
Kerala	Irinjalakkuda	Nice Mobiles	NICE BUILDING, ST. JOSEPH'S COLLEGE JUNCTION, IRINJALAKKUDA - 680121	3291515	Mr.Sebastian
Kerala	Kalpetta	Mobi Care	Ground Floor, Rawuthar Building, Opp. Vijaya Bank, Chungam, Kalpetta.	329366	Mc.Thanseer
Kerala	Kanhangad	XN Computers & Datacare	1st Floor, BENGACHERY COMPLEX, OPPVYAPARA BHAVAN, T B ROAD JN, KANHANGAD.	3259755	Mr.Sandeep
Kerala	Kannur	Sahar Communications	SB-666-C & D, PRESTIGE CENTRE, GROUND FLOOR, SUB REGISTER OFFICE ROAD, KANNUR.	3258585	McAjai Abhiram
Kerala	Karunagapally	Supreme Enterprises	Opp to KSRTC Bus stand, Karunagapally-690518	2620282	McRatish / Premkumar
Kerala	Kasargode	XN Computers & Datacare	BENDICHAL COMMERCIAL COMPLEX, PRESS CLUB JN, MG ROAD, KASARGOD.	324755	MrMrSandeep
Kerala	Kollam	Digital Infosystems	MC-3087, New Block, Bishop Jeromi Nagar, Chinnakada, Kollem-691001	2760647	McJohnson Lawrence
Kerala	Kottarakkara	Sivashakthi Communications	KP-II/1574, Valiyavila Building, Near Marthoma Girls High School, Pulamon PO, Kottarakkara	3298191	Mc.Suresh
Kerala	Kottayam	Svm Technologies	M.PM COMPLEX, Near Popular Maruti Show Room, M.C ROAD, S.H MOUNT, KOTTAYAM, KERALA- 686 006	2565303	McRajesh K S
Kerala	Kozhikode	Domain Systems & Services	17/1178E, 1st floor AL FAHAD, SABA school cross road, Putiyara, Kozhikkode	2722222 / 3243745	McMukundan
Kerala	Kunnamkulam	V Star Mobiles	ROOM NO 4/289/B2 2nd floor, City complex, Opp Tempo Park, Town Hall road, Kunnamkulam.	320009	McVijumon.K.V.
Kerala	Manjeri	Integrated Computer Systems	Royal Tower, TB Road, Manjeri - 676121	3299686	McThomason Chacko
Kerala	Mavelikara	Ettutharayil Agencies	GROUND FLOOR, KOIPPALLIL ROYAL ARCADE, PUTHIYAKAVU, MAVELIKARA-690101	3293340	McBiji
Kerala	Palai	Cyriac TV Plaza	Vypana Building, Petta Road, Palai.	329746	McTom Cyriac
Kerala	Palakkad	Orion Techno Solutions	12/310/15, FIRST FLOOR, METRO COMPLEX, HEAD POST OFFICE ROAD, PALAKAD-678001	3200255	McKhaja Hussain

STATE	CITY	ASC NAME	ASC ADDRESS	CONTACT NO.	CONTACT PERSON
Kerala	Pathanamthitta	Melamparambil Agencies	10/264, Main Road, Town, Pathanamthitta - 689645	2223132	McM.V.Francis Oommen
Kerala	Thalassery	Sahar Communication	44-1929, 1st Floor, MACKSON MONOR, OPP. PARIS RESIDENCY, LOGANS ROAD, THALASSERY	3208585	MrAjai
Kerala	Thiruvalla	Sangeetha Electronics	524/17, Central Tower, Cross Junction, Thiruvalla	3203000	McRanjeev Kumar
Kerala	Thiruvananthapuram	Appolo Systems	Thelungu Chetty Complex, Shop No 23-24, Kalpalayam JN Karamana, Thiruvananthapuram 695 002.	2340523	Mc.Santosh
Kerala	Thiruvananthapuram	Smart Mobile	TC 2/3554(5), First Floor, Opp. Petrol Pump, Kesavadasapuram, Trivandrum-695004	3200105	McKrishnakumar P B
Kerala	Thodupuzha	National Electronics	Shop No 5, Aswathy Shopping Complex, Temple Junction, Thodupuzha	220320	McAneesh M A
Kerala	Thiruprayar	Nice Mobiles	382J, 1st Floor, Century Plaza, N.H.17, Near Bus Stand, Thiruprayar	3240400	Mc.T.PSebastian
Kerala	Tirur	Telit Telecom Shop	GROUND FLOOR, AL AMAL COMPLEX, PAN BAZAR, TIRUR	3295623	McVasan.K.Nair
Kerala	Trichur	Cell Tech	Shop No 5/2, TC23/326, N.P.Tower Guruvayoor Road, Near Bindu Theatre, West Fort, Thrissur	2387386	Mc.Santom Kallloor
Kerala	Vaikom	Vaikundam Electronics	II/ 214C, Mannameriel Complex, Bus stand Road, Vallyakavala, Vaikom	326616	Mc.Sreekumar.G
Madhya Pradesh	Balaghat	Shri Computers	Keshar Plaza Complex, Hanuman Chowk, Balaghat	9300632132	Mc.Deepak Bajaj
Madhya Pradesh	Betul	Shivam Electronics	Jiaprakash Chowk, Kothi Bazar, Auto Stand, Betul - 460001	9329099071	McVikram Motwani
Madhya Pradesh	Bhopal	Akansha Enterprises	25-26, CENTRAL MARKET, ROSHANPURA SQUARE, BHOPAL MP	7553201626	Mc. Dinesh Asija
Madhya Pradesh	Bhopal	GSM Solution	M-2 CHETAK COMPLEX, ZONE -2 M.P NAGAR	4229213	McNeeraj
Madhya Pradesh	Bhopal	Music Mahal Bhopal	SHOPNO.1 NEW MARKET NEAR HANUMAN MANDIR, BHOPAL	5220725 / 2579178	Mc.Shinu
Madhya Pradesh	Chindwara	Bunty Photoelectronics	Shop No.33, Jiji Bai Complex, Parasia Road, Chindwara	230358	McRitesh Shukla
Madhya Pradesh	Dewas	New Taj Electronics	4, New Market, Moti Bunglow Main Road, Dewas	220005	McShabbir Shaikh
Madhya Pradesh	Guna	Mobile Junction	Jai Stambh Chauraha, Nr.Central Bank, Guna-473001	329277	Mc.Deepak Arya
Madhya Pradesh	Gwalior	Galav Computers	Ground floor, Ganpati Plaza, City Centre, Gwalior	4013311	McPradeep Dixit
Madhya Pradesh	Gwalior	Versha Sales & Service-Asp	GROUND FLOOR SARAFI BAZAR LASHKAR, GWALIOR	4060444	McAjit Kumar
Madhya Pradesh	Indore	Ayushi Electronics	UG-10, Ratnamani Complex, 7/1, New Palasia, Indore-452001	3251284	Mc.Santosh Dwivedi

STATE	CITY	ASC NAME	ASC ADDRESS	CONTACT NO.	CONTACT PERSON
Madhya Pradesh	Indore	IT Customer Care	UG- 11, B. M TOWER, OPP LOTUS, SAPNA SANGITA ROAD, INDORE	3207283	Mc Sanjay Dhankar
Madhya Pradesh	Indore	Pioneer Marketing	Prem Trade center Opp.Gujarati Girls collage, Indore	4006503	McRitesh
Madhya Pradesh	Itarsi	S.S. Telecommunications	Vijayshree Complex 5, Line Sarafa Bazar, Itarsi - 461111	9300272505	McAkilesh Saxena
Madhya Pradesh	Jabalpur	Sri Sai Communication	C/O MUSKAN CARD GALLERY, 766, SHAHID SMARK MARG, NEAR RANITAL SQUARE, JABALPUR-482001	4046831	McMohit Sareen
Madhya Pradesh	Jabalpur	I T Solution	Opp.Dr.Grover Hospital, Gate No-3, Wright Town, Jabalpur	4014064 / 4064370	Mr.Sanjeev Choubey
Madhya Pradesh	Katni	Excellent Infosys	20/306, Gurunanak Road, Katni	406047	McPratful Agrawal
Madhya Pradesh	Khandwa	Naman Refrigeration	TAPAL CHALL, KHANDWA	2230089	McYashwant Mali
Madhya Pradesh	Mandsaur	Sky Link Mobile Services	Payas Ice Cream Parlour, 16, Opium Godown Road, Nai Abadi, Mandsaur 458001 (M.P)	243978	McGaurav B. Mittal
Madhya Pradesh	Morena	Mobile Plaza	M S ROAD, JIWAJI GUNJ, OPP BANK OF INDIA, MORENA	400886	McT C Shivhare
Madhya Pradesh	Neemuch	Shree Balaji Mobiles	Jain Bhavan Road, Near Ganganagar Off, NEEMUCH (M.P)	320033	McSavesh Goyal
Madhya Pradesh	Ratlam	Kirti Telecom	124 Station road Opp.Raj Tower, Ratlam - 457001	239346	McKirti Jain
Madhya Pradesh	Sagar	Neeta Computers	Hanuman Mandir Gali 5, Civil Lines, Sagar -470001	329951	McRamesh Gupta
Madhya Pradesh	Satna	Akashwani Agencies	OPPCMA SCHOOL, SHOP NO.2, ANNAM CHHAYA, REWA ROAD	416455	McAjay Sukhramani
Madhya Pradesh	Satna	Maa Sharda Communication	Gali No1, C/o Shri Gopal Sharan Singh, Pushp Raj Colony, Satna	7672320797	McPrashant Singh
Madhya Pradesh	Shivpuri	Ocean Computer Corporation	1st Floor, Vishnu Mandir Market, Near Panipat Handloom, Shivpuri	225505	McSameer Saxena
Madhya Pradesh	Ujjain	Galaxy Computers & Communication	43/2, Varruchi Marg, Opp Madhav Nagar Police Staion, Freeganj, Ujjain	2515995 / 253999	McAnurag Chhajlani
Maharashtra	Ahmednagar	T V Spot	B-3, ADARSH SAMRUDHI, NR. CHOUPATI, KARANJA-414001	2326267	Mr Anil Apte
Maharashtra	Akola	Supra Computers	Ushakiran Complex, Shastri Nagar Opp. Hotel Surya, Akola.	9326866469	MrPrashant
Maharashtra	Amravati	Scorpio Services	Shop No. 84, Ground Floor, Gulshan Towers, Nr Panchasheel Cinema, Amravati, Pin-444601	2567302	Mc Pramod
Maharashtra	Aurangabad	Electronics World	Sahyadri Building, opp. To Shivaji School, Khokadpura, Aurangabad-431001	6454532	Mc Rauf

STATE	CITY	ASC NAME	ASC ADDRESS	CONTACT NO.	CONTACT PERSON
Maharashtra	Aurangabad	Unique Telematics	SHOP NO. 108A, FIRST FLOOR, 'TAPADIYA SUPAR' MARKET, NIRALA BAZAR, AURANGABAD -	2356447	McMahesh
Maharashtra	Beed	Shree Enterprises	Behind Raj Hotel, A H Wadia vachnalay rd, Beed	9373701010	Mc. Rajiv Joshi
Maharashtra	Chalisgaon	Mobile Point	SHOP-22, MOMAYA COMPLEX, NEAR BUS STAND, CHALISGAON	9372712777	Mc Dashrath Vaishnav
Maharashtra	Chandrapur	Shiv Communications	Ramnagar, Near Durga Mata Mandir, Sindh Colony, Chandrapur-442 401	329546	McMahesh
Maharashtra	Chinchwad (Pimpri)	Ritz Communication	Shop No 10, "A" wing, Jai Ganesh Vision, Next to Hotel Neelkanth, Near Fam Multiplex, Akurdi, Pune-411033	27485613 / 32661900	Ms Nikita
Maharashtra	Dhule	Pearl Communications	Shop no 3, CKB arcade, Near Devpur Bus stand, Agra rd, Dhule	324666	Mrs. Sonu Atul Bang
Maharashtra	Gondia	M/S V2 Care	Opp. Cofee house, Railtoli, Gondia 441614	329322	Mc Krishna Sargam
Maharashtra	Hatkangale (Ichalkaranji)	Sai Vision Services	11/236 MOHAN ARCADE SHOP NO B14, STATION ROAD, TAL-HATKANGALE, CITY-ICHALKARANJI-416115	2439989	Mc Sameer Bhonsale
Maharashtra	Islampur	Solar Shoppo	Kachare Lane Islampur, Distt Sangli	9326777603	Mc D.H.Patil
Maharashtra	Jalgaon	TelUs Associates	Shop No 16, 'C' Wing 1st Floor, Near Tarun Bharat Office, Golani Market, Jalgaon Maharashtra.	9370164545	Me. Shaikh
Maharashtra	Jalna	Megha Multi Serices	Shop no 04, A wing, Udhan complex, Jalna	9326201408	Mc Narendra Kulkarni
Maharashtra	Kolhapur	Sms Services	55, Diwan Tower, Opp. Nutan Marathi School, Near Mirajkar Tikky, Kolhapur, Pin -416005.	2541120	Mc Prakash Patil
Maharashtra	Kopergaon	Om Sai Mobile	Opp. ST Bus Stand, Daharangaon Road, Kopergaon, Dist Ahmednagar.	9373295009	McMahendra Devkar
Maharashtra	Latur	Hindustan Mobiles Services	Side no, 111, Shop 59, 49 Candhi Market, Near Bhalchandra Blood Bank, Latur-413512	641111 / 982345500	Mc Sandeep Parande
Maharashtra	Malegaon	Cell Care	Shop no 59, SR no 57, New Islampur, Malegaon	9326211996	Mr Ansari Mohd Israfil
Maharashtra	Mumbai	Cyber-Cyan Convergence & Services (India) Pvt. Ltd.	43/44, Gold Filled Plaza, Sion Bandra Link Road, Sion, Mumbai-400017	24075939	Mc Jatin Parekh
Maharashtra	Mumbai	G.P.Electronic	Shop No 6 Ambika Cooperative Housing Society, Jawahar Nagar Road No 2, Near Railway Crossing, Goregaon West, Mumbai 400062	2232633960	McMayur

STATE	CITY	ASC NAME	ASC ADDRESS	CONTACT NO.	CONTACT PERSON
Maharashtra	Mumbai	Grace Tele Services	Shop no 3, C/1, Manik Nagar Soc, Punjabi lane, Borivali (W ). Mumbai 400092	32455033	Mr. Daniel
Maharashtra	Mumbai	Komplex Telecom Corporation	Shop no.A/19, Nootan Nagar Premises Co. Op. Hsg. Society, Near Bandra Rly. Stn., Towards Bandra Talav, Turner Road, Bandra (West) Mumbai 400050	64147153	Mr. Sutar
Maharashtra	Mumbai	LG Service Centre	Shop No. 1, 2, 3 Ground Floor, Rajakamal Bldg, Opp.Ram Mandir, Subhash Road, Vile Parle(E) Mumbai 400 057	26134917	Mr. Rakesh / Omkar
Maharashtra	Mumbai	Paras Telecom	2nd floor, Rear Side Capital Cinema Building, Wauddy Road, Opp. Mumbai CST Railway Station, Mumbai	65279042	Mr. Ravindra
Maharashtra	Mumbai	Sai Tele Services	A-110, Satyam Commercial Complex, M.G.Road, Chatkoper (E). Mumbai - 400 077.	40111264	Ms. Isha
Maharashtra	Mumbai	Sierra Mobiles	Opp Prabhru Darshan, L.J.Road, Shivaji Park, Near Shiv Sena Bhavan, Mumbai 400016	24382200	Mr. Anurag
Maharashtra	Mumbai	Trident Communications	8-A, Vasant Smruti, Dadasaheb Phalke Road, Beside "BharatKshetra Building", Near Dadar station(E), Dadar -East, Mumbai - 400 014.	65047270	Mr. Kalpesh
Maharashtra	Mumbai	Yash Telecom	Dadarkar Tower, Shop no.1, Opp.Film Centre, Near Crossroads, Tardeo, Mumbai - 400 034	23522702	Mr.Girish
Maharashtra	Mumbai	KBs Communications	Shop No.2A, Maharashtra Seva Sangh, Near Apna Bazar, Nehru Road, Mulund (West), Mumbai-400080.	32107410	Ms. Harsha
Maharashtra	Nagpur	Epoch Services	Shope No. UG-9, Bhakati Vihar Complex, Chapru Nagar Square, Lakadganj, Nagpur -440008	3246777	Mr. Girish
Maharashtra	Nagpur	Shivatronics	B-31 Sai Regency Complex Ravi Nagar Square Nagpur Maharashtra 440044	9300892579	Mr. Ravi Gupta
Maharashtra	Nagpur	Spectrum Marketing	Shop No.2, Dharampeth Towers, West High Court (WHC) Road, Dharampeth, Nagpur - 440010	22527823	Ms. Sonali
Maharashtra	Nanded	Devansh Microtronics	Beside Forest office Nr. Ranbidkar Resi.Nanded	249789	Mr. Prashant Palnate
Maharashtra	Nasik	Mobs Associates	SHOP NO. 8A, FIRST FLOOR, 'KAPOTE-MEHER' MARKET, RENLIKA NAGAR, WADALA NAKA, DAWRKA, NASIK	6523613	Mr. Alim Kazi
Maharashtra	New Mumbai	Beekeyen Enterprises	Block No 1, Shop No. 17, Mahaveer Milan, Sector 28, Near Blue Diamond, Hotel, Vashi, New Mumbai	65114304	Mr. Shailesh
Maharashtra	New Mumbai	LG Service Centre- Dak	H Block, Ground Floor, Dhirubhai Ambani Knowledge City, Navi Mumbai-400709	30386032	Mr. Sachin



STATE	CITY	ASC NAME	ASC ADDRESS	CONTACT NO.	CONTACT PERSON
Maharashtra	Panvel	Oceanic Tele System	Shop No. 3, Sai Arcade, Sector 15, New Panvel (E), Dist. Raigad.	932217221	Mr Chetan
Maharashtra	Pen	Skyphone Enterprises	SHOP NO 3, SHREE COMPLEX, OPP UNIQUE BAZAR, PEN KHOPOLI ROAD, PEN, DIST RAIGAD-402107	9373435000	Mr Kaldeep
Maharashtra	Pune	Horizon	32A, Lotus Court, Near Hotel Panchami, Pune Satara Road, Pune.	32501222	Mr Nilesh Pundye
Maharashtra	Pune	Microchip Solutions	Akshay Chambers 216 Naryan Peth, Near Bhide Bridge, N C Kelkar Rd, Pune-411030	24471155	Mr Mahyesh Bhosale
Maharashtra	Pune	Mobile World	G-25, AKSHAY COMPLEX, DHOLE PATIL ROAD, PUNE-411 001	30942268	MrPawan Mantri
Maharashtra	Pune	Wiki Info Technologies	Shop No4, Amit Complex, 474, Sadashiv Peth, Opp New English School, Tiak Road Pune Maharashtra	24434134 / 9322206000	MrVivek Surve
Maharashtra	Ratnagiri	S P Electronics-Pune	shop no-19, Parasmani Complex, K C Jain Nagar, Nr Maruthi Mandir, Ratnagiri-415612	329556 / 221982	Mr.Santosh Prabhu
Maharashtra	Sangamner	Rajpal Telecom	Yashodhan complex, New Nagar Rd, Near hotel Chaitali, Sangamner	320888	Mr Harish Rajpal
Maharashtra	Sangli	Ramesh Electronics	Dr. G. S. Joshi Banglow. Opp. B.Ed Collage, Rajwada, Sangli., Tq. Miraj, Dist:- Sangli.	2327601 / 09372107601	Mr Suresh Shegane
Maharashtra	Satara	Shivkal Mobilink	173/6/7 Rawiwarpeth shop no-11., Vitthal Lila Complex, Powai Naka, opp Janta Bank, Satara-415002	325212	Mr Mahesh Shinde
Maharashtra	Shrirampur	Siddharth Infocom	Shop No 1, Hotel Sidhartha Building, Sidhartha Stop, Sagamaner Road, Shirampur-413709	9326611445	Mr Kedar Fargade
Maharashtra	Solapur	Atharva Electronics Pun	940/2 NORTH SADAR BAZAR, GARUD BUNGLOW, SOLAPUR-413003	2317595	Mr Umesh Kamalapurkar
Maharashtra	Solapur	Jawaharlal Radio Service	184, Cold Finch Peth, nr Hotel Ritesh, Solapur - 413007.	2725030	Mr Prasanna J Chavan
Maharashtra	Thane	Ekadant Corporation	Shop No1, Ground Floor, Laxmi Smruti CHS, Opp Bal Ganesh Temple, Near Makhmal Talao, Eduji Road, Charai, Thane (W) 400602.	32130222	Mr Paresh
Maharashtra	Thane	E-Link Solutions	Shop No.5., Type C, Bldg no.5/6, Shanti Vihar, Mira Road -E	9322839386	MrOmkar
Maharashtra	Kalyan	Sky Lark Associates	Shop:1, 'A' Wing, Suresh Tower Co-op. Hsg. Soc. Opp. Municipal Vegetable Market, Santoshi Mata Road, Kalyan (W)	3209899	Mr Pravin
Maharashtra	Bhiwandi	Varad Electronics	SHOP NO2, PRABHU CHAYA BLDG, PRABHU ALI, NEAR OLD GOVT. HOSPITAL, MANDAL, BHIWANDI, DIST THANE	222653	Ms. Swati
Maharashtra	Vashi	Beekeyen Enterprises	Block No 1, Shop No. 17, Mahaveer Milan, Sector 28, Near Blue Diamond, Hotel, Vashi, New Mumbai	65114304	Mrs. Kartiki

STATE	CITY	ASC NAME	ASC ADDRESS	CONTACT NO.	CONTACT PERSON
Maharashtra	Virar	Siddhivinayak Tele Services	Shop no 5&6, Vishnu Prasad Complex, Opp Utkarsha School, Near S.T. Bus stand, PP Marg., Virar ( West)	3258111	Mrs. Vaishali
Maharashtra	Wardha	Libra Electronics	C/o Anand Opticals, Soshalst Chowk, Main Road Wardha Maharashtra-442001	2242109	Ms.Manjusha
Maharashtra	Yavatmal	Combine Electronics & Services	Shop No 13, 1st floor, Old Indira Gandhi Market, Azad Maidan Road, Yavatmal-445001	9822200166	Mr. Ajay Shukla
Maharashtra	Yavatmal	I T Services	Nr datey college, C/o Yahoo cyber cafe, Yavatmal 445001	9372610121	Mr.Umesh Gadwe
Maharashtra	Yavatmal	Star Electronics	Near Shyam Talkies Ram Mandir Road Yavatmal Maharashtra 445001	2324106	Mr.Snajay Chabda
Meghalaya	Shillong	Rhapsody Care	E N COMPLEX, G.S. ROAD, Below Town Pharmacy	2547946	Mr.R.R Wazi
Orissa	Anugul	Creative Solution	Hanuman Bazar, Near gundicha mandir, Angul-759122	329207	Mr Tapas Sahu
Orissa	Balasure	Raghunath It Solutions	Azimabad, Proof Road, Balasure.-756001	329267	Mr.Sujit Kr Sen
Orissa	Berhampur	Rashmi Electronics & Computers	Shop No.19, Sai Complex, Main Road, Gandhi Nagar, Berhampur, Orissa	3290409	Mrs. Rashmi Ranjan Sharma
Orissa	Bhadrak	A B Associates	Nr.Reliance Web World Express, Bypass Road, BHADRAK-756100	9337040450	Mr Kartik Chandra Rout
Orissa	Bhubaneswar	Miracle Services It Extn.	Plot No. 136, Fr Lane of Vigilance Office, Beh. Passport Office, Surya Nagar, BBSR.	2532383	Mr.Chaco/ Suprava
Orissa	Bhubaneswar	S.A.Infosys	291 .Bomikhal, Opp.Akamra cinema hall, Bhubaneswar-751010	2573114	Mr. Ashwini K Sahoo
Orissa	Cuttack	O.A.Infotech	Behind Govt Bus Stand, Badambadi, Cuttack -753012	9338912613	Mr. Arabind Rout Ray
Orissa	Puri	Bajinath Infocomm	At Municipal Mkt, Grand Road, Puri-752001	9337032005	MrAjay/ Sandeep Agrawal
Orissa	Rourkela	Infosys	13, Bisra Road, subhadra complex Opp.Choudhary Petrol Pump, Rourkela	9337403999	Mr. Arun Ghosh
Orissa	Sambalpur	A.N.Communication	Inf. Of Zilla School, Pensionpara, Sambalpur-768001	9337660919	Mr. Md. Abdul Aziz
Punjab	Amritsar	Bajaj Telecommunication	87, G Floor, Nehru Complex, Lawrence Road, Amritsar-143001	3258599	Mrs.Suman Bajaj
Punjab	Barnala	Unique Infotech	Mittal Street, Near M C Office, Barnala-148101	238007	Mr.Pankaj Goyal

STATE	CITY	ASC NAME	ASC ADDRESS	CONTACT NO.	CONTACT PERSON
Punjab	Batala	Dream Services	Shop No 111 Opp Improvement trust office, Dharamsingh Market, Batala.	9316676018	Savdeep Singh
Punjab	Bhatinda	Lalli's Electronic Gallery	1139-A, First Floor, Amrik Singh Road, Nr Gole Diggi, Bhatinda-151005	2239500	McAshok Kakra
Punjab	Chandigarh	New Tech	SCO 495/496 SEC 35C First floor	9814244862	McPawan
Punjab	Chandigarh	Vignesh Services	S.C.O- 189-90, Sec- 34, Chandigarh	3018028	McMukesh Arya
Punjab	Hoshiarpur	Kuldip's Mobile Care	Dhobian Wali Gali, Phagwara Road, Hoshiarpur-146001	226906/ 2232906	McKuldip
Punjab	Jalandhar	Mobile Center	235/1, Saheed Udham Singh Nagar, Backside Hotel Preet, Nakodar Road, Jalandhar-144001.	3292666	McVikas Sangar
Punjab	Kapurthala	Arun Electronics	217, C Block, Jama Masjid, Shopping Complex-144601	329254	McArun Khosla
Punjab	Kotkapura	Om Mobile Service Centre	1ST FLOOR DHANU RAM PANSARI, Railway Road-151204	223069 / 9815759239	McRohit Mittal
Punjab	Ludhiana	Anant Shree Comp	19K Opp PAU Gate no 1 Ferozpur Road	3245386	Ms Monia chaudhary
Punjab	Ludhiana	Shahi Communication	Shop No.5, Revolving Restaurent 4X International, 583 L, Model Town, Ludhiana	3244190	McAmit Shahi and mrvimal
Punjab	Malaut	Khurana Mobile Solution	SHOP NO 7 OPP, NEW TELEPHONE EXCHANGE G T ROAD MALLUAT PIN NO = 152107	9316940003	McRamesh Khurana
Punjab	Malerkotla	Prime Infocomm	Opp. Main gate, Govt College, Malerkotla-148023	253899	McRohit Bansal/ Raj Verma
Punjab	Mandi Gobindgarh	Aditya Infocom	Main Iron Market, custom and exise office Mandi Gobindgarh	326896	McNaresh Aggarwal
Punjab	Mansa	Sharma Telecom	Cinema Road NAGINA MARKET OPPPARKASH BOOK DEPOT, Mansa	9316173009	McUdesh Kumar Sharma
Punjab	Moga	Rashpal Telecom	6, Red Cross Road, Court Road, Near Old Court, Moga-142001	222468	Mc Rashpal Singh
Punjab	Nabha	Echo Telecom	Opp. Milan Palace Circular Road. NABHA 147201	504501	McGirish Garg
Punjab	Nawasher	Kapoor Electronics	Kothi Road, Opp Kumar Hotel, Nawashahr-144514	508085	McNarendra Pal
Punjab	Pathankot	Leo Comp	Near Tourist hotel, military ground, Pathankot	9814586406	McMr Kamal
Punjab	Pathankot	Touch Infosys	189 Opp. Guru Nanak Park, Model Town, Pathankot.	3290300	McNavdeep Singh Bedi

STATE	CITY	ASC NAME	ASC ADDRESS	CONTACT NO.	CONTACT PERSON
Punjab	Patiala	Image Services	Shop No.84, First Floor, Leela Bhawan Opp Punjab National Bank, Patiala-147001	2222796 / 9872281524	Mr.Rohit Bansal
Punjab	Phagwara	Bansal Telecom	G T Road, Railway Road Chowk Near Connect Office, Phagwara-144401	461321 / 9888005339	McMangalesh
Punjab	Rajpura	M K Enterprises	Shop no.6, Gurudwara Singh Sabha Market, Rajpura Town-140401	2652569	McJohny
Punjab	Ropar	Arora Communication	Shop No.1, Lehari Shah Mandir Road, Ropar	9872363032	McAmit Arora
Punjab	Samana	Sangam Mobile Care	Tehsile Road, Near Garg Labourtry	505648	McVaneet Kumar
Punjab	Sangrur	National Computers	SUNAMI GATE, Near Guru Nanak School, SANGRUR PIN NO = 148001	233335 / 9814586196	McSarabjit Singh
Punjab	Sarhind	A.S. Infocom	Grain Market, Cinema Road Sirhind City-140406	500726	McJaspreet Singh
Rajasthan	Ajmer	Nehal Infotech	F-3, FIRST FLOOR, AMAR PLAZA, Opp. DAULAT BAGH, AJMER-305001	3291404	McSuresh Sharma
Rajasthan	Ajmer	Prangan	112/10, Civil lines, Ajmer	9828503092	McPareek
Rajasthan	Alwar	R.K.Telecom	SHOP NO.112, FIRST FLOOR, GANPATI TOWER NEAR NANGLI CIRCLE, Alwar	9351390057	Umesh sharma
Rajasthan	Beawar	Srikrishna Infocom	Chaoni Road, Bhagat Chauraha, Near Roadways Bus Terminus, Beawar	329675	Mc Dheerendra Agrawal
Rajasthan	Bhilwara	Ajanta Communications	No3, Bapna Complex, Pur Road, Bhilwara	329549	Rafiq
Rajasthan	Bikaner	Tech Solutions	1st Floor, 222 & 223, Ganpati Plaza, KEM Road, Bikaner	3292423	McAziz/Vika
Rajasthan	Chittorgarh	Arihant Infotech	A46, Meera Market, Near Rajasthan Patrika Office, Chittorgarg-312001	325933	McAbhishek
Rajasthan	Chomu	Tambi Telelink	Kotwali chabutra, dhan ji ki gali, Sadar Bazar Chomu-303702	9314090400	McAnup Tambi/ Dp Saini
Rajasthan	Dholpur	Tirupati Telecom	14, Bhagwati Market, Near Jagan Cinema hall, Jagan Tiraha, Dholpur	9314014093	McMoshin/ Devender
Rajasthan	Jaipur	Alpha Infotech Systems	F-1, First Floor, Krishna Mall, Lakshmi Mandir Crossing, Tonk Road, Jaipur-302015	3299724	Shatrugan mangal
Rajasthan	Jaipur	Alliance Communication	G6, City plaza, Space Cinema Hall, Jhotwara Road, Jaipur-16	9351371549	Amit/Bhushan
Rajasthan	Jaipur	Solution Computers	Plot No.4 Krishna Nagar StationJanpath Near Hotel Paradise Jaipur	5106388	McDhreej Mathur
Rajasthan	Jhunjunu	M S Mobile Point	Kaswan Complex, Opp Roadways Bus Stand, Jhunjunu	9314011951	McAbhshek / McSunil
Rajasthan	Jodhpur	Omega Electronics	Plot No.196 SS Tower, AkhalyaChowraha Jodhpur-342003	3291214	McPratap Singh

STATE	CITY	ASC NAME	ASC ADDRESS	CONTACT NO.	CONTACT PERSON
Rajasthan	Kishangarh	Capital Enterprises	5, Radha Krishan market, Opp. Sardul school, Kishangarh-305801	326550	McShatraghan
Rajasthan	Kota	Cyber Infosystems	26, Ground floor, Kalawati Palwal market, Gumanpura, Kota-324007	2392153	Mr Rajnish
Rajasthan	Kota	Saya Electronics	1-TA-16, Vigyan Nagar, Kota	9828503246	McLalit
Rajasthan	Kotputli	Isha Communications	11, ground floor, Govardhan plaza, Nehru Bazar, Kotputli	9314140001	McVjender
Rajasthan	Nagaur	Jam Appex	Shop num.7, Opp. Old power house Ram Poll, Station road, Nagaur	329595	McAmit
Rajasthan	Nathdwara	Geniune Infotech	Shop num.10, Suriya apartments, Opp.Vandana talkies, Bus stand, Nathdwara.	329208	McGajender/Mr Ashwini Purohit
Rajasthan	Pali	Mansi Mobile	9, Vasant Vihar, Opp. Bangur college, Pali-306401	9352766555	McAbhishek
Rajasthan	Shriganganagar	Telecare Servecies	33, J Block, Near Birbal Circle, SriGanga nagar	3207687	Abhishek
Rajasthan	Sikar	Rita Computers	Shop No.4, Kabra Market, Shramdan Marg, Sikar-332001	329320	McSaurav Chakravarthy
Rajasthan	Udaipur	Shree Telelink	31, First floor, Indra prasth complex, Delhi gate, Udaipur-313001	3261777	Tanujay Jain
Tamilnadu	Ambasamudram	A to Z Communications	63-D, KNV Complex, Santhai Bazaar, Ambasamudram -627401	251143	Mr Raja Selvakumar
Tamilnadu	Arkonam	G.M. Marketing	NO.3/4, SUBURAYAN STREET, ARAKKONAM-631001	231395	McMrPCajapathi
Tamilnadu	Arni	Digitech Computers	Shop No. 201/82- B1, SM Road, Arani - 623101	223929	McD.Mohan Ram
Tamilnadu	Aruppukottai	The Mercury Computers	607, MADURAI ROAD, NEAR NEW BUS STAND, ARUPPUKOTTAI-626101	222552	Mc R. Boominathan
Tamilnadu	Attur	V.R. Net	V.R.Net, Dr.Arumugam complex, salem main road, ATTUR	243585	Mr.Senthil Kumar
Tamilnadu	Batlagundu	Karthik Communications	No 221, Main Road, Batlagundu- 624202	9360019090	Mr Lakshmanan
Tamilnadu	Bhavani	Sri Abirami Electronics	2E, Pavadi Street, Anthiyur Corner, Bhavani-638301	230919	Mr Balamurugan
Tamilnadu	Chegalapatu	SKB Electronics	No-42 Devarajanar pillai Street, Vedachalam Nagar, Chengalpet	37406080	McBalaji
Tamilnadu	Chennai	Genesis Communication	63/3, First main road, Gandhi Nagar, Adyar, Chennai-600020	24401188	Mr Suresh
Tamilnadu	Chennai	CS Systems	547/352, F M Towers, Mount Road, Nandanam, Chennai-6000035	24330889	McNicholus
Tamilnadu	Chennai	Sabisu	B2, Golden Enclave, New 275, Old 184, Poonamallee High Road, Kilpauk, CHENNAI 600 010.	26612347	McPalani
Tamilnadu	Chennai	Unicare Infocomm Services	No.293, Arcot Road, Next to Indian Overseas Bank, Kodambakkam Chennai - 24	24724666 / 52047059	McKartik
Tamilnadu	Chennai	Garage De Telecom	OLD No:30- NEW No:10, KMBF BUILDING, 1ST FLOOR, DURAISAMY ROAD, NEAR POTHYS, TNAGAR, CHENNAI 600017	28143454	

STATE	CITY	ASC NAME	ASC ADDRESS	CONTACT NO.	CONTACT PERSON
Tamilnadu	Chidambaram	Future Tech	Hasan Towers, 1st Floor, No. 14, V.G.P.Street, Near Hotel Ritz, Chidambaram	222150	Mr.Shaker
Tamilnadu	Coimbatore	Classic Electronics	No 1/1, Alagappa Road, 6th St, Tatabad, Coimbatore - 640012	4374875	Mr Arivazhagan
Tamilnadu	Coimbatore	Fast Track	138-C, TV Swamy Road ( West ), RS Puram, Coimbatore - 641002	2551155	Mr Anand
Tamilnadu	Coimbatore	Nucom Services	3/61, Master Building, Kattoor Road, Pappa Naicken, Palayam, Coimbatore - 641037.	4351569	Mr.Uthaman
Tamilnadu	Cuddlore	Kasturi Cellular Service	NO: 37 (2C) BHARATHI ROAD, CUDDALORE. 607 001, CUDDALORE DISTRICT, TAMIL NADU.	220183	Mr Raghupati
Tamilnadu	Cumbum	LG Mobile Service Gallery	No 52, Gandhiji Street, CUMBUM-625516	320800	Mr.Senthil Kumar
Tamilnadu	Dharapuram	IT Zone	40-A-1, Bye Pass Corner, Dharapuram-624202	329293	Mr Ramakrishnan
Tamilnadu	Dharmapuri	Calrity Digital Photo&Audio	98/29C KANDASAMY VADIYAR STREET, DHARMAPURI, 636701	329707	Mr.Raj Murugesan
Tamilnadu	Dindigul	Padma Electronics	15, Dudley high School, Dindigul	9367927080	Mr. Murali Chandra
Tamilnadu	Erode	Jans Electronics	29, Sathy Road, Near Hotel Oasis, Erode - 638004	3258526	Mr Kannan
Tamilnadu	Gobichettipalayam	Best Electronics	47a/1, kms complex kachery medu, gobichettipalam	225598	Mr.G.A.Jayakumar
Tamilnadu	Hosur	Suryas Will Of People	R S Towers, Opp Traffic Police Station, Bangalore By Pass Road, Hosur-635109	246687	Mr.Shanmugam
Tamilnadu	Kallkuruchi	New Magestic Cell Sales&Service	OPP TO TELEPHONE EXCHANGE, GANDHI ROAD KALLAKURICHI	228270	Mr. Murugesan
Tamilnadu	Kanchipuram	Classic Mobile Care Centre	Door No.67-A, (Shop No.5), P.S.K. Street, Kancheepuram-631 501	9345636900	Mr.Damodaran
Tamilnadu	Karaikal	Shree Hari Cellular Service	OPP. TO NEW BUS STAND, BHARATHI MAIN ROAD, KARAIKAL-609602	320544	Mr. K. Selvaganapathy
Tamilnadu	Karaikudi	Sitiyees Electronics	10 A / 3, Muthalakshmi Complex, Opp to Income Tax Office, Sekkalai, Karaikudi - 630002	9362611455	Mr. S. Veerapandiyian
Tamilnadu	Karur	Aswathi Electronics	No 90 / 102, Old Bye pass Road, Karur-639001	9843045555	Mr Satish Kumar
Tamilnadu	Kovilpatti	St.Marys Cellphones	No.6, Rajakumari Towers, AKS Theater Road, Kovilpatti	9360533649	MrJyappan
Tamilnadu	Krishnagiri	Madura Care Centre	No 361, Crown Complex, Bangalore Main Road, Krishnagiri-635001	9364258223	Mr Suresh Kumar
Tamilnadu	Kumbakonam	Fargan Electronics	NO.5 VRS COMPLEX, HAJJAR STREET, KUMBakonam- 612001,	2401123 / 3290303	Mr. Surbudeen

STATE	CITY	ASC NAME	ASC ADDRESS	CONTACT NO.	CONTACT PERSON
Tamilnadu	Kuzhithurai	Mobile Care	Shop no 211, SM Arcade, Main Road, Marthandam, Kuzhithurai - 629165	270587	Mr Surendra Kumar
Tamilnadu	Madurai	Devaa Electronics	No.4, Thirumakulam North Street, Near Ayyappan koil, Thhallakulam, Madurai-625002	4360995	Mr. Guna
Tamilnadu	Mayiladuthurai	Nrs Mobile City	NO-28 - C/14, R.R.COMPLEX, MAILADUTHURAI	223277	Mr Abdul Rahim
Tamilnadu	Nagercoil	Redeemer Electronics	Shop no 2, Pillars Gate, Balamore Road, Nagercoil-629001	327788	Mr.Dinkar
Tamilnadu	Namakkal	VR Care	77/2, Veera Vilas, Trichy Main Road, Namakkal - 637001	329304	Mr. R. Vijayalakshmi
Tamilnadu	Ooty	Mountain Cell Com	NO-302, Band lane, Commercial road, Near Liberty Theatre, Ooty-643001.	2443787	Mr.Sujith & Miss Geetha
Tamilnadu	Palani	Hi-Tech Electronics	No.76, New Dharapuram Road, Opp. ICICI Bank, Palani - 624601	320264	Mr. R. Ramachandran
Tamilnadu	Paramathy Velur	Vishwak Mobiles	No 5, KK High School Building, 98, High school Road, Paramathy Velur - 638182	224348	Mr Mohan
Tamilnadu	Pattukottai	Mobile Care	127, BIG STREET, PATTUKOTTAI	9842653921	MrAnul Alagan
Tamilnadu	Perambalur	The Best	Virkanand st., M.P. office opp., Perambalur	275717	MrPKumar
Tamilnadu	Perundurai	Sree Baby Electronic	483 mainroad, perundurai	221800	Mr.Shiva Balan
Tamilnadu	Pollachi	Star Mobiles	SHOP NO. 5 Ground Floor, Vasanth Complex, Immamkan Street, POLLACHI.	222230	Mr.Senthil Kumar
Tamilnadu	Pondicherry	Digital Logistics	126/2, Perumal Koil Street (Bharathi Street Cutting), Pondicherry-605001	4210148 / 9843093348	MrG Singaravelu
Tamilnadu	Pondicherry	Balaji Electronics	No.21, 3rd CROSS STREET, Annanager, PONDICHERRY,	3090414	
Tamilnadu	Ponneri	Sri Balaji Mobile Care Center	NO. 26, THALUKKA OFFICE ROAD, PONNERI, THIRUVALLUR DIST-601204	27973381	Mr.Balaji
Tamilnadu	Port Blair	Universal Service Care	R.G.T. ROAD, PORT BLAIR, ANDAMAN-744101	329588	MrNaveen
Tamilnadu	Pudukottai	Yem Kay Electronics	2, Subabharathi complex, 5378, 79, Alangudi Road, Pudukottai-622001.	9344038441	MrRajesh Kannan
Tamilnadu	Rajapalayam	Sri Vignesh Mobiles	292\1, TENKASI ROAD, OPP BOMBAY LODGE, RAJAPALAYAM-626117	220398	MrKu.G.Muthiah
Tamilnadu	Ramanathapuram	Zeenath Telecom	13-B/23, PAL LUCKY PLAZA, RAMANATHAPURAM-623501	226750	MrM.S.Jahir Hussain

STATE	CITY	ASC NAME	ASC ADDRESS	CONTACT NO.	CONTACT PERSON
Tamilnadu	Ranipet	Unicare Infocom Services	No.36, opp.Gangadhara Muddaliar Middle School, MBT Road, Novelpur, ranipet, Vellore Dist.	270806	McBasker/ McKarthik
Tamilnadu	Rasipuram	Sms Care Service	No 179 / 1, Anna Salai, Ground floor, Rasipuram-637208	9345052553	Mr Manikavasagam
Tamilnadu	Salem	Vishwesh Mobiles	Sixer Complex, 121/19A, Sarada College Road, Next to Abi Medical Centre, Salem - 636007	3290535	McVasudev Nayak
Tamilnadu	Sivakasi	Tele World	78, PARSN PLAZA, OPPTO.WATER TANK, SIVAKASI-626123	223283	McB.Mathan Kumar
Tamilnadu	Tambaram	Saravanas Infocom Services Pvt Ltd	New No-43, Old No:3A, Mudichur road, Tambaram west, chennai 600045	32915599	McPalani/ McRanjith
Tamilnadu	Tenkasi	Airtone	1/ 17, KMSS complex, west masi street, Tenkasi. 627811	227980	McM.Nagaraja Sankar
Tamilnadu	Thanjavur	Z M Electronics	1006/1007, South East Rampart, Opp to Municipal Higher Sec School Tanjore - 613001	272595 / 329554	MrZiauddin
Tamilnadu	Tindivanam	Reva Communications	Old No. 117/1, New No. 205/1, Nehru Street, Tindivanam - 604001	225250	McLakshmi Narayanan
Tamilnadu	Tiruchendur	Ark Mobile Solutions	ARK DTP centre, No. 1 a 7 North car street, Rayan Complex, Tiruchendur. 628215	329380	McMahesh
Tamilnadu	Tiruchengode	Balaji Electronics	108 s s d road, near lorry stand tiruchengode	325430	McSekar
Tamilnadu	Tirunelveli	Classic Electronic	39, Trivendrum Road, Opposite Kalmark, Welcome Complex, Palayamkottai, Tirunilveli-627002	2575801 / 3290339	McErkins
Tamilnadu	Tirupattur	Acal Computer Systems	52/1, kkc complex, krishnagiri road, tirupattur	325385	McSunder
Tamilnadu	Tirupur	Shri Vasavi Electronics	# 155-303, Mangalam Road, Karuvam palayam, Tirupur -641604	4244009	McU.B. Bala Murali
Tamilnadu	Tiruvarur	Softel Teleservices	No 21, Municipal Complex, Ground Floor, Panagal Road, Tiruvarur-610001.	22110	Mr Ravi
Tamilnadu	Tiruvellore	Yamkama Computer	38/186 JAWAHARLAL NEHRU ROAD, OPP TO SBI MAIN BRANCH, THIRUVALLUR - 602 001	37600329	Mc Saravana
Tamilnadu	Trichy	S K Electronics	Raj Complex, 9/A EVR Road, Puthur, Trichy- 620017	277194	McKrishnan
Tamilnadu	Tuticorin	Snows Cell Care	Kala Complex, No 20, B-1, W G C Road, Tuticorin-628002	2334043	McKennedy
Tamilnadu	Udumalpet	Allwa Electronics	5 Thulua vellar shopping complex, V.O.C. street, UDUMALPET.642126	223047	Mr Sentamarai Kannan



STATE	CITY	ASC NAME	ASC ADDRESS	CONTACT NO.	CONTACT PERSON
Tamilnadu	Vaniambadi	Reva Communications	No.848/3, CL Road, Vaniyambadi - 635 751	395023	McLakshmi Narayanan
Tamilnadu	Vellore	Matha Communication	4, S.LN Plaza, Opposite Odai Pilliar Koil, Gandhinagar, Vellor - 632006	2240800	McGuna Shekhar
Tamilnadu	Villupuram	Broad Band	No 642, Nehruji Road, VILLUPURAM	222936	McPragasam
Tamilnadu	Virudhunagar	RBG Electronics	76/9, Lakshmi Complex, Pullalakottai Road, (Opposite Uzhavar sandhai), Virudhunagar-626001.	420160	Mr Karpuruswamy
Tripura	Agartala	VIDEO S R	7Melarmath, H.G.Basak Road, Agartala, West Tripura, Pin:799001	2328539	Arunabha Saha
Uttar Pradesh	Agra	Ankur Care Centre	27-C/111, Hotel Panchratna Building, Opp. Income Tax Building, Sanjay Place, Agra-282002	9412254152	McAnkur Goyal
Uttar Pradesh	Aligarh	A.V.Computer Services	City Enclave opp. Kumar Nursing Home Ramghat Road	3200900	McVaibhav Gupta
Uttar Pradesh	Aligarh	Infocare	17, Vikram Arcade, Railway Road, Aligarh -202001	3258080	Mr. Prabal Bansal
Uttar Pradesh	Allahabad	Micronet Solution	B 38/1, SHOP NO. FF3 VASHITSTHA VINAYAK TOWER, TASHKAND MARG, CIVIL LINES, ALLAHABAD	9335395183, 3250231	Mc Hashmi
Uttar Pradesh	Allahabad	Radio Centre	SHOP NO-3 1ST FLOOR MEENA BAZAR, Allahabad	3292488	Mc Marish Khanna
Uttar Pradesh	Amroha	Shree Jee Traders	Bazar Zatt, Near Tehsil Mor, JPNagar AMROHA-244221	9319075289	McArun bhargav
Uttar Pradesh	Azamgarh	Rajasthali	ASIF GANJ, CHOWK, AZAMGARH-276001	223644	McTriloki Nath Jalaan
Uttar Pradesh	Badyun	Customer Care Services	Plaza Market 1st Floor Near Chantaghar sixroad Badyun.	9319697938	Mc. Nazim
Uttar Pradesh	Bala	Sankatha Communications	Mall Godam road Dr.S. N.pandey Clinic Chowk Bala-277001. UP	9307637850	Mc. Marish
Uttar Pradesh	Barabanki	Yash Enterprises	Rashid Enclave, Mugal Darbar, First Floor, Nagar Palika Road, Barabanki	9336323714	Mc Ajay Srivastava
Uttar Pradesh	Bareilly	Jai Infotech	SA-24 DEENDAYAL PURAM BAREILLY	3208484	Mr Rohit Tandon
Uttar Pradesh	Bareilly	Sapan Infotech	G - 64 A Kunwar Complex, Near Gupta Watch Co, 116 Civil Lines, Bareilly	3297933	Mc Dhirendra Negi
Uttar Pradesh	Basti	Royal Enterprises	near ses agency, janta hotal, gandhi nagar, basti	9336784054	Mc Deepak shrivastav
Uttar Pradesh	Bhadoi	Kislay Communication	Station Road, Near Narmada Girls Inter College, Bhadohi-221401	9235506029	McKislay
Uttar Pradesh	Bijnor	Konark Service Centre	Shop No.7, 1st Floor, Near Ajaz Ali Hall, Nagar Palika Complex, Bijnor-246701	9358364067	McPratyush Gupta

STATE	CITY	ASC NAME	ASC ADDRESS	CONTACT NO.	CONTACT PERSON
Uttar Pradesh	Bulandshahr	MN Telecom	Shop No-1 BHARAMAPUTRA COMPLEX, KALA AAM, Bulandshar	9358011688	Mr Taulik Khan
Uttar Pradesh	Chandousi	Om Technologies	697, SITA ROAD, NEAR GANESH MANDIR, CHANDOUSI - 202412	9359986766	Mr.Sachin Gupta
Uttar Pradesh	Deoria	Atharav Communication	SHOP NO 5, SHANTI COMPLEX, HANUMAN MANDIR ROAD	9335226799	McK.N.Gupta
Uttar Pradesh	Etah	Triveni Computer Service	688/1 Vijay Nagar, Infront of Shradha Cnema, Thandi Sadak, Etah-207001	9719398761	McVinod Kumar
Uttar Pradesh	Etawah	Frontline Computer	132, Sivil lines, Pakka Talab X-ing, Opp. HeroHonda Showroom, Etawah-206001	9219404194	McPuneet Kaushik
Uttar Pradesh	Faizabad	Microworld Computer Hardware Lab	1st floor, Baldev Plaza, Rekhbagarj, Faizabad	395744	McKapil/Sunil
Uttar Pradesh	Farrukhabad	Wave Technologies	2 B /122 AVAS VIKAS, LOHIA PURAM, FARRUKHABAD-209625	9335921175	Mc.Dharamveer
Uttar Pradesh	Fatehpur	Trimurti Telecom Services	230, SHADIPUR CHAURAHA, NASEPEER ROAD, FATEHPUR-212601	9336223093	Mr.Sanjay Sachan
Uttar Pradesh	Chaziabad	Azure Systems	F-28 Konark Building, RDC, Raj nagar GZB	2700717	McAseem Saraswat
Uttar Pradesh	Chaziabad	Concessionair Documentation India Pvt Ltd (Cdil)	C-83, Rajnagar District Center (RDC), Chaziabad	3292011	McAnil Tiwari
Uttar Pradesh	Gonda	Digitech Services	Suraj Complex Malviya Nagar, Ground Floor, In front of Distt. Mahila Hospital, Gonda	9336695719	McAtul Singh Chauhan
Uttar Pradesh	Gorakhpur	Eternal Electronics	Shop No.11, Pandey Complex, 33, Kasya Road, Opp DIG Bunglow, Gorakhpur -273001	9336410222	Mc Ajith
Uttar Pradesh	Gorakhpur	MM Communication	Udai Trade Centre, Opp Dr H.N.Singh Medical College road, Basharatpur, Gorakhpur	3250395	McAshwani
Uttar Pradesh	Hapur	Smart Solutions	10, 1st Floor, City Plaza, Hapur, Chaziabad - 388001	9219659957	McRajkumar Kanaojia
Uttar Pradesh	Hardoi	Shipra Electricals & Appliances	SHOP No.7 RD PLAZA, INFRONT OF VADIK VIDHYA MANDIR, NEAR AGARWAL DHRAMSALA & HOTEL UTSAV, CIRCULAR ROAD, HARDOI-241001	222384	McGaurav
Uttar Pradesh	Hathras	Arya Electricals	Bldg No.2206, Near Mayfair Hotel, Kamla Bazar, Hathras-204101	9319338655	Mc.Suneet Arya
Uttar Pradesh	Jaunpur	Shubham Pustakalya	Mandi Naseeb Khan, Near Siya College, Jaunpur	9336510130	Mr.Sudhir/Sanjay
Uttar Pradesh	Jaunpur	Supreme Communication	J.P. Complex, Oland Garj, Jaunpur	9235407278	McMahatab Raja Beg
Uttar Pradesh	Jhansi	Krishna Enterprises	372/A CIVIL LINES, GWALIAR ROAD, JHANSI-284001	9335090997	Mc.Sujeet

STATE	CITY	ASC NAME	ASC ADDRESS	CONTACT NO.	CONTACT PERSON
Uttar Pradesh	Kannoj	Dixit Mobile Lab	SHOP NO. A1 WARSI COMPLEX, LAKHAN TIRAHA, KANNOJ	9335042373	McSunil Dixit
Uttar Pradesh	Kanpur	Aakarsh Electronics	63/2 C(9)BALAJI COMPLEX, THE MALL, KANPUR	9335360303	McRaman
Uttar Pradesh	Kanpur	LB Infotech	111A/409 1st floor, 80-ft road, ashok nagar, kanpur	3207303	McDeepak Bhatia
Uttar Pradesh	Kasganj	Prem Computer Services	Roop Complex, Nadrai Gate, Kasganj-207123	9837403904	McVinay Agrawal
Uttar Pradesh	Khatauli	Sigma Systems	A-6, Shivlok Market, Near Indra Murti, G.T.Road, Khatauli-388001	9319666000	McAlok Kumar
Uttar Pradesh	Lakhimpur	S S Electronics	CJRDARSHAN BUILDING, KACHEHRI ROAD, LAKIMPUR KHERI, LAKHIMPUR -262701	9335038258	McSaurabh Sinha
Uttar Pradesh	Lucknow	Alfa Electronics	Shop No.CF20 ABC Complex, Kanpur Road, Lucknow	3248730	McHarjinder Singh
Uttar Pradesh	Lucknow	Hitech Communication	SS 205, Cross road Plaza, Badshah Nagar Crossing, Lucknow.	9335088061	McRavi Prakash
Uttar Pradesh	Lucknow	Mobile Dot Com	shop no. 111, 1st floor, Shri Ram Towers, Ashok Marg, Lucknow	9335819202	Mr Anand Jhouri/ Archana
Uttar Pradesh	Lucknow	Net Com	3 way road, City Point, Opp Krishi Bhawan, Lucknow-226024	3294222	McVinod Sharma
Uttar Pradesh	Lucknow	RR Enterprises	Shop No.3, first floor, Deewan Chand Complex, 292/11 Chowk, Lucknow	3262263	McRoohan/Yogesh
Uttar Pradesh	Mainpuri	Raj Communication	1002, Sadar Bazar, Near PNB, Mainpuri-205001 (LIP)	9358090251	McRishabh Kherbat
Uttar Pradesh	Mathura	R K Infocare	G-1, Atithya Palace, Sonkh Adda, Junction Road, Mathura-281001	3292274	McAlok Gupta
Uttar Pradesh	Meerut	Care Centre	G-19, Yardaman Plaza, Carh Road, Meerut-250005	3258427 / 4005019	McAjay Mittal
Uttar Pradesh	Meerut	Coincap Services	Labour Compound, Above Allahabad Bank, Near Akash Ganga Jewellers, Begum Bridge, Meerut	2667942	McAtul Mittal
Uttar Pradesh	Meerut	Essar Services	F-132-1333, 1st Floor, Ganga Plaza, Begum Bridge Road, Meerut-250001.	4025863 / 9837067894	McRajiv Gupta
Uttar Pradesh	MIRZAPUR	Singh Cyber	IMARTI ROAD, OPP- LIC OFFICE, MIRJAPUR-231001	9335205600	MRAnup Singh
Uttar Pradesh	Modinagar	Ananya Communications	24, K.N.MODI COMPLEX, Modinagar-201204	325424	McNitin
Uttar Pradesh	Moradabad	Bhavya Technologies	A12, 1st floor, Rampur Road, Gandhi Nagar, Moradabad	3292318	McVivek Kumar Singh
Uttar Pradesh	Mugalsarai	Sky Mobile World	SUPER MARKET, MUGALSARAI	9335251754	McVibhuti Jaiswal
Uttar Pradesh	Muzaffarnagar	Advance Series	Shop No-15 prakash chowk Muzaffarnagar-251001	9412210142	Mc. Rajiv

STATE	CITY	ASC NAME	ASC ADDRESS	CONTACT NO.	CONTACT PERSON
Uttar Pradesh	Muzaffarnagar	Jai Computers	Shop No. 4, 1st Floor, Roorkee road, Near Shiv Chowk, Central Bank Mkt, Muzaffarnagar-251001	3294447	McManohar Singh
Uttar Pradesh	Noida	M R Telecom	D-329, Sector 10, Noida, (Corner Building, Noida Stadium - Jhundpura Main Road)	4312715	McKailash Aggarwal
Uttar Pradesh	Pilibhit	Kamal Electronics	Station Road, Pilibhit	9319911226	Mc. M A Jillani
Uttar Pradesh	Pratapgarh	Chandra Pratap Veer & Co	KATCHERY ROAD, CHOWK BAZAR, PRATAPGARH -230001	9335050301	McRajesh Agarwal
Uttar Pradesh	Rai Bareilly	Karuna Enterprises	Shop No.6 & 7, City Complex, Kachary Road, Raeberilly	9336005741	McVikas
Uttar Pradesh	Rampur	Mamta Technologies	3Fs Shopping Complex, Rahe Murtaza Road, Civil Lines, Rampur-244901	3294923	McRajeev Yadav
Uttar Pradesh	Saharanpur	Maharaj Communications	1st Floor, Pradeep Hotel Compound, Court Road, Near Indiam bankSaharanpur-247001	3250239	McPankaj Malhotra
Uttar Pradesh	Shahjahanpur	Sunny Mobile Point	258 B TARIN BAHADURGANJ, SHAHJANPUR	9335019616	McRajaram Maurya
Uttar Pradesh	Sitapur	Higrade Computers	7, Muncipal Market, Sitapur	9936819899	McSanjeev Goel
Uttar Pradesh	Sultanpur	S S Infocom	SHOP NO. 14& 15 NANDINI COMPLEX NEAR SUPER MARKET SULTANPUR-228001	9335055217	McSachin Dwivedi/Abhinav
Uttar Pradesh	Unnao	Avijit Infocom	251 Opp Collector Ganj, Unnao-209801	6820020	McVishnu Pandey
Uttar Pradesh	Varanasi	Jaiswal Electronics	SIDDHARTH COPMPLEX, C-2/10-A, Ramkatora, Near Petrol Pump Lahurabic, Varanasi-221001	9335407000	McSujeet
Uttar Pradesh	Varanasi	Shivam Mobile Distributers	Shop No.5, B37/115-B-1 Baradari Complex, Rathyatra Crossing, Varansi Pin 221010	9335418998	McRakesh kumar singh
Uttaranchal	Almora	Kumar Telecommunications	Paltan Bazaar, Almora	9411525789	Mc. S Kumar
Uttaranchal	Dehradun	Krishna Communication	Shop No 15A, Meedo Plaza, Rajpur Road, Dehradun, Uttaranchal-248001	09358112922 / 09358119696	McVinod
Uttaranchal	Haldwani	Fairdeal Agencies	1st Floor, Nainital Road, Uttaranchal Trade Centre, Tikonía Chouraha, Tikonía, Haldwani	282116	McAjay Gupta
Uttaranchal	Haridwar	Maharaj Computer Services	B-7, Royal Plaza, Ranipur Mod, Haridwar	9359209901	Mc Kamal Sachdeva
Uttaranchal	Kashipur	Tirpti Communications	Station Road, Main Market, Udamsingh Nagar	9359000000	McAjay Gupta
Uttaranchal	Roorkee	Geetanjali Telecom	Shop No.6, Shyam Market, BSM Tiraha, NehruNagar, Dehradun Road, Roorkee-247667.	326510	Mc Marish Kumar

STATE	CITY	ASC NAME	ASC ADDRESS	CONTACT NO.	CONTACT PERSON
West Bengal	Asansol	Sky Computer & Telecom	Islam Market, Nuruddin Road, Assansol-713301	2207719	McSyed Arshad Ali
West Bengal	Behrampur	Chaitannya Enterprise	152, B B Sen Road, Sadar bazar, PO Behrampur, Distt Murshidabad, pin-742101	9333310161	McSubhas Chandra Basak
West Bengal	Bolpur	Cyber World	59, SUPER MARKET, SANTINIKETAN ROAD, BOLPUR - 731204	252542	McGishor Kumar Mukherjee
West Bengal	Burdwan	San Infosys	27/1 C.T Road, East End, Burdwan -713105.	3290265	Mr.Sanjit Debnath
West Bengal	Durgapur	Digitech Service	Ashok Bhavan J.K.Pal Lane .Benachity , Durgapur -713213	3293600	McPintu Chatterjee
West Bengal	Haldia	Digitrnix	Holding no -25, PO Kharjanchak, PS Durgachak, Haldia, Dist- East Medinapur-721602	277277 / 9332987527	Mr.Suman Jana
West Bengal	Howrah	Joyram Infotech	51, Jessore Road, Habra Bazar, Das Market, Dist- 24th Pargana(North), PIN-743263	302399 / 329677	Mc Malay Das
West Bengal	Katwa	Devarshi Mobile Communication	Bhutnath Tala, Besides Ram Bhavan, Post - Katwa, Burdwan - 713130	9333611904	Mc Devananda Dutta
West Bengal	Kharagpur	S. J .Communication	Inda Main Road, Khudiram Ram Market, Kharagpur .Shop No-53. Pin -721305	324056	McMr.Suman Jana
West Bengal	Kolkata	Benma Infosol Pvt Ltd.	P-168/1 CIT Road, Scheme VIII, KOLKATA 700 067	32943176	McArun Surana
West Bengal	Kolkata	Friends Communication	32(8) Barasat Road, N/L 15 no railgate, PO-nonachandanpukur, PS-Titagarh, Barrackpore, Dist- North 24PGS, PIN-743102	25921263	McArup Sarkar & Tarasankar Mukherjee
West Bengal	Kolkata	Jakson Engineering Pvt Ltd	Block-A, Shop-1, Ambika Vihar, 1/1 Hardutrai Chamania Road, Howrah- 711001	32950383	McP.Mukherjee
West Bengal	Kolkata	JP Computers	5B Ekdalia Place, Kolkata - 700019	24401923	McSomim Kabir
West Bengal	Kolkata	Skylink	8/1A, Little Russel Street, Calcutta-700071	32903814	McH R Molla
West Bengal	Kolkata	Sun Mobile Service	15 B.T. Road, N/L Peikpara Bus Stop, Kolkata -700002	32505444	McVivek Kumar Gupta
West Bengal	Krishnanagar	Addya Electronics	Rajani mukharjee Lane, krishna Nagar, Nadia-741101	2329355	Mr Arijit Sen
West Bengal	Malda	Deb Infotech	PIROJPUR, WOMENS COLLEGE ROAD, MALDA-732101	9434345486	McUTPAL DEY(DEBASIS)

STATE	CITY	ASC NAME	ASC ADDRESS	CONTACT NO.	CONTACT PERSON
West Bengal	Midnapore	Zerobit	Vill- Parbatipur, PO.-Tamluk, Dist- Purba Midnapur, PIN-721636	267476 / 9434110802	McChanakya Sengupta
West Bengal	Nadia	Prayash	30 SWAMI VIVAKNANDA SARANI, RANAGHAT, DIST-NADIA,	9333515949	Mr. Amar Nath Malick
West Bengal	North 24 Parganas	M/s Telelink	Bashirhat Old Market(Bowbazar) .Bashirhat Dist, North 24pgs, Pin-743411	325499	Mc Sukanta Debnath.
West Bengal	North 24 Parganas	Molina Traders	Jessore Road, Bongoan, Dist- North 24 th Pargana, PIN-743235	325433	Mc. Subir Dutta
West Bengal	Purulia	IT POINT	N.C DAS GUPTA ROAD, 2ND FLOOR, SONARTARI APPT(NAMO PARA), PURULIA - 723101	9333441065	McPinaki Roy Choudhary
West Bengal	Serampore	Sri Guru Mobile Service	87 B/15 G.T.Road (West), Hooghly Pin-712203	32528581	McShyamal Kumar Das
West Bengal	Siliguri	Care	sumantra bhawan.S.B.I hakim para building, 160/1030 Haren Mukharejee Road, siliguri-734001	6450515	McSnjoy Dutta

	<b>SERVICE</b>
	<b>1800-180-9999*</b> <b>39-01-0909**</b>
<small>*MTNL / BSNL **Prefix STD Code</small>	









